

APPENDIX A: NONLINEAR INCREMENTAL STRUCTURAL ANALYSIS OF ZINTEL CANYON DAM

A-1. Introduction

a. Purpose.

(1) The U.S. Army Corps of Engineers, Civil Works, has been developing guidelines and procedures for determining thermally generated stresses resulting in construction of massive concrete structures. The original product of the research and development was documented in ETL 1110-2-324, Special Design Provisions for Massive Concrete Structures and has since been superseded by ETL 1110-2-365, Nonlinear Incremental Structural Analysis of Massive Concrete Structures.

(2) The Walla Walla District was commissioned to perform a thermal stress analysis of Zintel Canyon Dam. The goals in performing this study are to:

(a) Perform a nonlinear, incremental, structural analysis (NISA) to evaluate the effects of temperature, Roller Compacted Concrete (RCC) material properties, and the subsequent volume changes on the cracking potential of Zintel Canyon Dam. The purpose of such an analysis is to evaluate costs and performance so that appropriate design features and requirements may be established. Obviously, since the dam is complete, no design modifications will be done. However, some observations of the effectiveness of such an evaluation can be made.

(b) Demonstrate the implementation of the NISA process for an RCC structure and compare analytical performance with observed performance of the structure. In the process, evaluate the NISA method to provide recommendations on what measures may be implemented to make the process more serviceable. By performing a NISA of a current project at the District level, valuable insight would be gained on whether this analytical method is a suitable tool for designers and implementable at the district level.

(c) Evaluate the suitability of the Corps of Engineers' guidance in performing nonlinear, incremental structural analyses for Zintel Canyon Dam. At the time the NISA was performed, the guidance was contained in ETL 1110-2-324. A new document, ETL 1110-2-265, has been published, but most of the procedures for performing a NISA remain the same.

b. Scope. This work is limited to the NISA evaluation of Zintel Canyon Dam. The analyses performed for the project are not intended to be comprehensive evaluations as described in the ETL, but abbreviated evaluations, more appropriate for a structure of this type and function. There are two reasons for this abbreviation. The structure is a simple gravity design, containing no contraction joints and impounding no permanent reservoir. Since transverse cracking of the structure poses no threat to the safety of the structure or to the public and does not impact the function of the project, a relatively simple analysis is sufficient. Secondly, the level of funding for this study was not sufficient to perform extensive analyses. Funding only permitted simple modeling and limited evaluations. However, the extent of analysis was sufficient to evaluate the thermal stress performance, to provide recommendations on district implementation of the NISA, and to evaluate the guidelines specified in the ETL.

c. Report. This report is organized to specifically address the study goals. Section 2 provides background on the development of finite element analyses for mass concrete structures which led to the development of the current procedures for performing thermal stress evaluations and Corps guidance on the subject. The NISA evaluation for Zintel Canyon Dam, which includes the details of performing the evaluation and the project specific results, conclusions, and recommendations, is contained in Section 3 and the referenced appendices. Recommendations are provided, in Section 4, on implementing a NISA evaluation. Finally, recommendations for modification of the guidance, to make it more useful in application of the NISA process, are contained in Section 5.

A-2. Background

a. Development of the NISA process.

(1) Mass concrete structures are different from many concrete structures in that material properties have a significant effect on the state of stress in the structure. These material properties are not only dependent on the type and quantity of material, but on the age of the concrete, temperature of the

concrete, and the state of stress of the material. Further, certain material properties exhibit nonlinear performance and somewhat unusual behavior at early ages. Consequently, definitive analyses of mass concrete structures require a very complex analysis procedure requiring the definition of many variables.

(2) A further complicating factor is that most mass concrete structures, such as dams, are constructed over a long period of time. Consequently, thermal stresses develop during the construction phase and may be significantly affected by subsequent construction activities.

(3) The evolution of an analysis package to adequately model these variables has been a long and tedious process. One of the earliest attempts to develop an analysis system was in 1966 during the design of Dworshak Dam. A finite element analysis package was developed, under contract, by researchers at the University of California, Berkeley. This system was likely one of the first such analysis tools ever developed. Over the years, the finite element analytical process has progressed to the point where many commercial vendors have provided quite sophisticated analytical tools for the evaluation of stress and strain in concrete structures. Unfortunately, most of these systems are general purpose computer codes that do not address the specific issues of the time-dependent behavior of mass concrete.

(4) More recently, the Corps of Engineers has initiated the development of supplemental codes and techniques to enhance and refine the analytical process. The Corps selected for general use, ABAQUS, a general purpose finite element code. ANATECH Research Corporation, under contract to the Waterways Experiment Station (WES) developed software subroutines to be used with the ABAQUS general purpose finite element code. These subroutines were designed to allow the user to input accurate, time dependent and cracking material properties of concrete into the ABAQUS model.

(5) ETL 1110-2-324 dated 30 March 1990, "Special Design Provisions for Massive Concrete Structures," was published, providing policy guidance to designers for execution of a NISA for the design of mass concrete structures.

b. Applicability of ETL-1110-2-324. The guidance provided by this ETL has been followed in the analysis and design of several structures. Most

notable was the analysis of Lock and Dam 26 near St. Louis, Missouri, and the current design of Olmsted Locks and Dam on the Ohio River. Several concerns have been raised regarding the implementation of the ETL. The analytical process, as outlined in the ETL, is extremely comprehensive and expensive. Certainly, not all Massive Concrete Structures require a NISA to be performed. The results of this study can be used to determine the applicability of the current ETL guidance for future projects that may or may not require a NISA be performed.

A-3. Zintel Canyon Dam Thermal Cracking Evaluation

a. General. The purpose of performing a thermal cracking evaluation for Zintel Canyon Dam was to determine the consequent cracking of the structure resulting from thermally generated volume changes. Since the evaluation was performed some time after the construction of the dam, actual conditions, such as ambient temperatures, RCC placing temperatures, and placing schedules were used in the model. However, additional laboratory work to characterize RCC materials was not done because of limited funds. This included creep properties, thermal properties, and tensile strain capacity. Instead, these material properties were estimated. In addition, the limited access to computer resources necessary to perform the analyses further limited the depth of the investigation.

b. Project description.

(1) Zintel Canyon Dam is a straight axis concrete gravity structure. The length of the structure is 520 ft across at the crest and 126 ft above the foundation at the deepest point. The structure is constructed of 70,600 cu yd of RCC. The outflow spillway is 160 wide with a crest 16 ft below the top of the dam. The spillway flows are contained by cast-in-place concrete training walls anchored to the RCC mass and RCC gravity training walls bordering the stilling basin. The dam, stilling basin, and stilling basin training walls are founded on basalt rock (see appendix C for a more complete project description).

(2) The project provides flood protection to the city of Kennewick, Washington. It is located on Zintel Canyon, a 19-square mile water course which threatens the city with winter snow melt and summer thunderstorm events. The water course is otherwise a

dry streambed. The structure will impound the 100-year flood for no more than 20 days. A self-regulating outlet provides reservoir drawdown at a controlled rate. The structure is designed to require no manned operations in the event of a flood.

(3) After final excavation of the foundation, the rock surfaces were cleaned and covered with a wet-mix shotcrete and foundation concrete. RCC was placed in 12-in. thick horizontal layers on and against these foundation surfaces. Interfaces of the RCC and the foundation concrete were bonded with a bedding mortar. Similarly, the RCC lift joints were fully bonded with the same bedding mortar. RCC placement began on 6 July 1992 and was completed on 15 October 1992. The 126 RCC lifts were placed in approximately 75 placing days during a 100-day period. In general, the process was to deliver the RCC to the dam on a conveyor. Front-end loaders received the RCC and transported it to the desired location. The RCC was spread with a small dozer and compacted with a vibratory roller.

c. ABAQUS model and data.

(1) After developing the mesh for a two-dimensional transverse model through the spillway section, it became apparent that a three-dimensional model would become extremely large. Although the CRAY could handle the computational analysis during this study, the time required to execute such a model would have been extensive, due to the system workload. In addition, the geometry of the dam does not lend itself to easy input generation for ABAQUS and as a result, extensive efforts to generate the model would be required. A three-dimensional model would increase the cost of the study significantly beyond initial estimates. Because of these factors, the study was limited to two two-dimensional models. Thermal analyses of this nature have most often been done using two-dimensional models. A two-dimensional transverse model usually gives good analytical results that can be used to predict cracks that propagate inward from the surface and cracks originating from the foundation. However, recent projects, most notably Upper Stillwater Dam, experienced significant cracking. These cracks propagate vertically from the foundation and are oriented perpendicular to the longitudinal axis. The Bureau of Reclamation performed a thermal analysis to predict the crack potential. They utilized a transverse, two-dimensional model and a longitudinal model of a horizontal plane.

Because of the magnitude of the cracks at the foundation/RCC interface, it was necessary to determine the suitability of a longitudinal model of a vertical plane for use in predicting crack potential. As a result, two 2-dimensional models were analyzed. One model computed stresses resulting from a transverse model and the other computed stresses from a longitudinal model in a vertical plane. While these two-dimensional models provide less accurate solutions than a 3-dimensional model, the accuracy is appropriate considering the size of the project and available funding for the study. The limitation of the two-dimensional, longitudinal model, is that it is assumed that symmetry exists on either side of the longitudinal plane, which is not the case. This assumption may cause a shifting of the thermal gradient from its actual location. In the case of the transverse model, the full section is modeled which more accurately models the thermal gradient. Appendix A, Figure A-1, shows the location of the assumed two-dimensional plane through the dam. Thermal contours of both models, shown in Appendix A, demonstrate a good correlation of peak temperatures between the two models.

(2) Because RCC exhibits similar material characteristics as conventionally placed mass concrete, the analytical process for determining thermal gradients and stresses in RCC is practically the same. The analytical procedures have been well documented by previous analyses and authors and should follow the general guidance established in ETL 1110-2-324. However, RCC construction generally occurs over a relatively short time frame with numerous lift joints (usually 1 to 2 ft in height). Conventionally placed mass concrete usually involves placements with lift heights of 4 to 7 ft with 5- to 7-day restrictions placed on form removal. The exposure and depth of each lift in conventionally placed concrete will generally define the limits of the number of steps necessary to perform the incremental analysis. In contrast, continuous placement of RCC on some projects has achieved four 1-ft lift heights in 24 hr. In a 7-day period, RCC can achieve changes in elevation of 25 to 30 ft, depending on the project specifics and resultant production rates. Therefore, before a NISA can be performed for RCC, a comprehensive study of production rates must be completed in order to select time steps, the number of steps, and element mesh size. The results of the production rates, in combination with the element size, and parametric studies

described in the following paragraph, will define the element mesh.

(3) The mesh sizes for the two models were established by the equation provided in the ABAQUS user manual and restated in ETL 1110-2-234. Results from this equation were found to be very restrictive on the element size. Instead, a simple parametric study was performed to determine if a larger element size could be used without creating numerical instabilities in the thermal model. The results of the parametric study indicated that the maximum length of the element in the direction of heat flow could be 48 in. For both models, 48 in. was the maximum size of element used in any direction for a 6-hr time interval. A 6-hr time interval was chosen based on production rate of RCC and because it satisfied the maximum time interval required to compute early heat gain in the concrete. Results of the parametric study are shown in Appendix B. Mesh size was then correlated with the RCC placement schedule of the dam and was designed to capture heat gains at the early ages of construction. Appendix A, Figure A-1 represents a time history for construction and the analysis for the transverse and longitudinal model respectively, as well as the initial conditions, boundary conditions, and input values used. Boundary conditions include the insulating effects of upstream precast facing panels, free surface convection, soil (rock) conditions, downstream stilling basin slab, average daily temperatures for preconstruction, during construction, and postconstruction. Initial conditions include RCC placement temperatures, and initial foundation temperatures. The user subroutine DFLUX was used, in conjunction with ABAQUS, to generate time-dependent heat fluxes for the thermal analysis. Parameters used in DFLUX included adiabatic heat gain (time and temperatures) for the RCC mix as well as initial placement times for each lift. Adiabatic heat gain curve is plotted in Figure A-1. Results of the thermal analysis for both the transverse and longitudinal model are represented in contour plots in Appendix A, Figures A-2 to A-11 and time history plots of maximum nodal temperatures in Appendix A, Figures A-12 and A-13. The maximum temperature reported in the transverse model is represented by node 2330, Figure A-12c, and in the longitudinal model by node 3213, Figure A-13c. Maximum temperatures and temperature differential correlate well with predicted temperatures calculated by using approximate computational methods for Zintel Canyon Dam. As stated previously, effects of maximum heat gain between the two models were

nearly the same. However, there is a notable difference in the rate of cooling. The two-dimensional elements do not have the capability to conduct heat in the out-of-plane direction. With convection being modeled along the top surface only, of the longitudinal model, the elements sustain a higher thermal gradient over a much longer period of time.

(4) Discussion of stresses for both models should be limited to principle tensile stresses. However, software developed for plotting stress histories is only capable of plotting stress in orthogonal directions and for shear stresses. Because Zintel Canyon Dam normally has no pool and experiences a very short duration reservoir impoundment, cracking posed no concerns related to seepage. Of concern are the orientation of cracks that will compromise the stability of the structure. A feature of the ABAQUS-based NISA that sets it apart from others is that it allows material properties and relationships to be user-defined. UMAT is the subroutine that provides a time-dependent cracking material model. The subroutine allows input of specific material properties and calibration of the model-predicted properties against actual observed material performance. While some material testing had been done for Zintel Canyon Dam, extensive evaluation of time-dependent properties and creep performance had not been determined. Consequently, calibration of the UMAT material model could not be performed. The material model generated for Olmsted Locks and Dam was used except that the material constants were replaced with actual or estimated values for Zintel Canyon Dam RCC materials. This means that the UMAT predicted performance for Zintel Canyon Dam was based on Olmsted material relationships. No data were available to shift the relationship curves. Without actual data to calibrate the material model, changes would be arbitrary and not necessarily an improvement over using the Olmsted data. To perform a reliable NISA, these material properties need better definition. More complete definitions of the development of the modulus of elasticity and creep are critical to accurate results. For smaller scale projects, standard relationships for a range of materials should be developed so that the analyst can select the performance relationship that most likely models the materials being evaluated. Only the larger projects will have the funding to perform a complete battery of laboratory evaluations. For the longitudinal model, the maximum principle stress occurred at the foundation/RCC interface at element 1796 and are presented by stress contour plots in Appendix A, Figures A-14 to A-19

and A-20 to A-25. ABAQUS calculated a maximum principle stress of 715 psi which occurs during the cooling period when maximum temperature differentials occur. Earlier testing of the RCC mix indicated a 28-day tensile strength capacity of 200 psi. The 715-psi principle stress calculated is far in excess of the tested direct tensile capacity. This may be attributed to the fact that the analyses were performed using the original version of UMAT. That version contained inconsistencies which resulted in the cracking threshold to be computed in an unconservative manner. This inconsistency has been corrected in the current version of UMAT which was not available when this study began. However, newer versions of software available at WES have the capability to predict and plot direction and magnitude of cracks. Observation of the stress contours for the longitudinal model indicate higher stresses occur at the foundation interface and in the upper reaches of the abutment and at the spillway. This can be attributed to the temperature differential occurring between the exterior and interior elements and the rigidity of the foundation. At the time of year for postconstruction cooling, the average ambient temperature is decreasing causing a larger temperature differential from surface elements to interior elements. Time history stress plots of various points of high stresses observed in the contour plots are presented in Appendix A, Figures A-26 to A-32 and A-33 to A-40. The stress time histories presented in Figures A10.4 and A10.6 indicate that some cracking may have occurred. Jumps in stress, as indicated in these plots, typically do not occur unless a crack has formed. Discussion of these results are presented below. Likewise, the transverse model predicted stresses that are higher than the limited cracking stress. The highest stress occurred at element 217 at the foundation/RCC interface. In addition, a region of high stress occurs along the downstream exposed face of the dam.

d. Discussion.

(1) A simple thermal analysis was done for the project during the design phase of the project. This analysis indicated that during the normal summer weather conditions at the site, the structure may crack at three locations. Two-crack locations were estimated to be located where the foundation changes from a horizontal surface at elevation 635 to the sloped abutments. The third crack was speculated to be in the center of the spillway. None of these cracks pose a threat to the stability of the structure

since the orientation will be in the traditional upstream-downstream direction. In addition, since the dam is almost continuously dry, and channel flows carry a phenomenal silt load, this cracking of the structure is not of great concern. No additional expense was warranted in lessening the cracking potential by reducing the placing temperatures or by installing transverse joints.

(2) Postconstruction inspections revealed one crack in the structure located high on the left abutment as a result of a slope change in the foundation. No other cracks are apparent. Less cracking has been observed because the restraint provided by the foundation is probably lower than full restraint assumed by the simple analysis.

(3) Examination of the temperature history plots indicates that the longitudinal model cools at a much slower rate. The benefits of performing a longitudinal model are significant when time and costs are of concern for smaller projects, or projects of this type where certain cracking will not adversely effect the performance of the structure. However, in this case, the thermal gradients of the longitudinal model should be calibrated with the more accurate transverse model to produce nearly the same rate of cooling. This may become a significant factor in the analysis because:

- While cooling is at a slower rate than might be expected, this will cause volume changes and hence the maximum stresses to occur at a later age in the model. Since the higher stresses occur later in time, the aging modulus will be higher. Since the criteria for cracking is partially based on stress, the potential for cracking will be unconservative for this case.
- The thermal stresses are being applied at a later age; therefore, the effect of creep will play a less significant role in stress relaxation. This may be conservative; however, as long as a large amount of effort has been expended to accomplish a material investigation, it would be prudent to spend the same amount of effort to calibrate the longitudinal model. This will ensure that the analysis will incorporate the more accurate creep data in the earlier time steps when cooling would be expected to cause higher stresses. Hence, the effects of stress relaxation due to creep will be incorporated into the analysis.

(4) Calibrating the longitudinal model may be done by adjusting the thermal conductivity of different element sets, allowing for higher conductivity in the earlier time steps and reducing the conductivity in the later time steps where the convective surface plays a more significant role in cooling.

(5) Examination of the stress history plots indicates stresses are still increasing as a result of decreasing ambient air temperatures. For both models the cooling period should, at a minimum, be applied until thermal stresses begin to decrease and attain a steady state. For this analysis the cooling period was 9 months for the transverse model and 3 months for the longitudinal model. Admittedly, this analysis fell short of predicting maximum stresses. However, review of the principle stress contours from the longitudinal model reveals high stress areas where cracking is likely to occur. One area is at the center of the spillway, the second, at the intersection of the spillway and non-overflow section, and the third, in the upper reaches of the abutments. With the version of UMAT used for this study, it is difficult to predict where cracking will initiate first. However, where locations of high stresses occur, the model may be modified to depict the location of transverse joints if cracking is undesirable in those regions. Other conditions that affect the stress in the dam are the assumed foundation restraints. Both models include fully restrained boundary conditions at the RCC/foundation interface. By visual observations of the rock and postconstruction coring of the foundation, the assumed restraint conditions used in the model could be modified to provide a more flexible restraint condition or an adjusted foundation modulus. Before proceeding with any further analysis, the most recent version of UMAT should be used to include the redistribution of stress that occurs after cracking. For this study, no further calibration of the longitudinal thermal model was completed. This is mainly due to limited scope of the study and the fact that cracking is not of great concern for Zintel Canyon Dam.

e. Conclusions.

(1) Performance of the analysis leads to several conclusions and recommendations for subsequent steps to proceed with further evaluation of cracking. The first step would be to make the required adjustments in the foundation modulus and/or the restraint conditions. The model for Zintel Canyon Dam included the foundation in the stress analysis. Adjusting the foundation modulus to tested values

would be more appropriate in this case. If the foundation conditions are modeled by the use of springs, the degree of restraint may be adjusted by softening or stiffening the spring constants. In the case of Zintel Canyon Dam, the foundation rock was highly fractured. Therefore, the degree of restraint provided by the concrete to rock interface may be less than fully restrained. However, unless sufficient data support softening the spring constants, the results of the stress analysis would be unconservative in this case. Secondly, the model can be modified by inserting a transverse joint at the mid-point of the spillway or at the corners of the spillway/non-overflow intersection. Additional measures could include reducing the RCC placement temperature and mandating placement schedules to avoid hot seasons.

(2) For Zintel Canyon Dam, considering the frequency of reservoir impoundment and the function of the structure, the observed cracking is well within acceptable levels for the project. There would be no benefit for implementing these measures.

(3) The results of this NISA analysis were, in general, consistent with the results of the approximate thermal analysis performed during design of the project. Both indicate that cracking may occur in three areas. Based on that comparison and the observed performance of Zintel Canyon Dam and other RCC dams, the NISA for Zintel Canyon Dam provided no additional information to attain the desired objectives stated in the ETL. This statement is based on the fact that:

- Some cracking would be acceptable as long as structural stability is not compromised.
- Joints for control of cracking is not necessary for serviceability conditions since there is no permanent reservoir.
- Because of the combinations of the above, real cost savings have been achieved by maximizing production rates for placement of RCC.
- Unusual loadings, extreme loadings, or severe operational conditions do not exist.

(4) This is not to say that a NISA should not be performed for RCC structures. Each structure is subject to unique conditions and loadings resulting in unique structural features. These factors are

evaluated and developed by a team of responsible engineers who must determine the level of analyses and consultation necessary to obtain any of the desired objectives stated in the ETL. The ETL cannot provide guidance for all possibilities.

A-4. NISA Application Recommendations

a. Applications.

(1) This work would not have progressed without the aid of several WES personnel. These individuals, currently running ABAQUS problems on the CRAY, provided a significant amount of consultation. This type of aid will likely be necessary should district users begin to utilize this software and equipment.

(2) This evaluation was performed over a lengthy period of time. The time period was much longer due to a start-stop approach employed for the study. Several problems were identified during this period that seem to be shortcomings of the current NISA process. Admittedly, some of the problems encountered were due to the protracted approach taken. A start-stop operation is rarely an efficient operation.

(3) Accessing the CRAY computer provides a variety of problems. Remote access for field use of ABAQUS at this time is not possible, because ABAQUS is currently site licensed for use at WES. Districts preparing to embark on such a study will find it necessary to utilize WES personnel at WES or perhaps negotiate a contract with the ABAQUS owner (Hibbitt, Karlsson, and Sorenson Inc.) to allow the District access to ABAQUS via the WES Cray. Our conclusion is, that while the CRAY may provide significant computing capability, the logistical problems to off-site users may provide more problems than solutions for off-site users.

(4) There has been a tremendous amount of effort expended in developing NISA via ABAQUS and the user subroutines. The logical next step is to develop desktop software packages that would be beneficial to Districts with smaller projects requiring finite element analysis or larger projects where preliminary two-dimensional modeling is necessary

prior to embarking on a full scale three-dimensional NISA. The Cray-based software usage would then be reserved for those rare monumental projects. It is recommended that a micro-based version of this software be utilized for most applications.

(5) A critical deficiency in the ABAQUS analytical package is the lack of graphic preprocessing and postprocessing routines. Adequate preprocessing would eliminate much of the input generation errors. Currently, there is no interactive preprocessing capability. Further development of preprocessing and postprocessing routines should match formats provided by some of the more common processing routines currently being used by designers.

(6) For these analyses, input to the user subroutines required changing the FORTRAN code to provide heat flux information, creep and shrinkage characteristics corresponding to appropriate element sets. Although many engineers can decipher FORTRAN code, many involved in the work may not have produced any programs for years. This can be time consuming and is a waste of effort in the design. A more appropriate means for entering data would be via batch files to the user subroutines as is currently permitted. UMAT is an extremely comprehensive subroutine that is the crux of the time-dependent stress analysis. Subsequent to this study, the capability for entering data to the user subroutine through a batch file was implemented.

(7) For Districts to utilize ABAQUS in order to execute a NISA as part of the design process, and to achieve the stated objectives in the ETL, ABAQUS must be readily available to District designers. Without these labor saving additions, ABAQUS use by designers outside of WES may never develop.

(8) Wide usage by Districts will no doubt require sophisticated support services in the form of training and user support. This service is best provided by WES. Program orientation is recommended in the form of a periodic PROSPECT course on the use of the NISA/ABAQUS system. Secondly, a staff member(s) must be available to service the ABAQUS system and provide user support. User support may range from troubleshooting user problems to working as part of the design team.

A-5. ETL Recommendations

a. Future guidance.

(1) Future guidance concerning mass concrete should address whether performing a NISA is mandatory. Current guidance is unclear i.e., a reader can either assume that a NISA is mandatory (ETL 1110-2-324 paragraph 7a) or that the need for such an investigation is subject to consideration (ETL 1110-2-324 paragraph 7b). It should be noted that a new ETL has been published, that incorporates updated information based on NISA's that have been performed by WES that may address these issues. The considerations for when to implement a NISA versus other less comprehensive analyses need to be developed and included in any comprehensive policy document.

(2) Certain basic questions must be addressed prior to embarking on a NISA. These include:

- Why do a thermal study?
- Is a thermal study appropriate for this structure? If so, what level of analysis is necessary?

- What are the basic principles?
- How do I do a thermal study?

(3) It is recommended that future documentation address these issues. The document should address the basic issues of the goals and desired objectives when performing thermal studies and supplemented with more specific information, for all levels of analyses.

(4) Guidance in the ETL references acceptable bandwidths to be applied to the mechanical properties of the concrete for estimated data. There are several ways to generate reasonable estimates of this data at the time of the analysis. Further guidance, that would be beneficial, should reference other sources that contain the methodologies to estimate the data.

(5) We concur with the recommendation of the ETL that the full intended benefit of a NISA requires the combined efforts of the structural designer, materials engineer, cost engineer, and the geotechnical engineer.

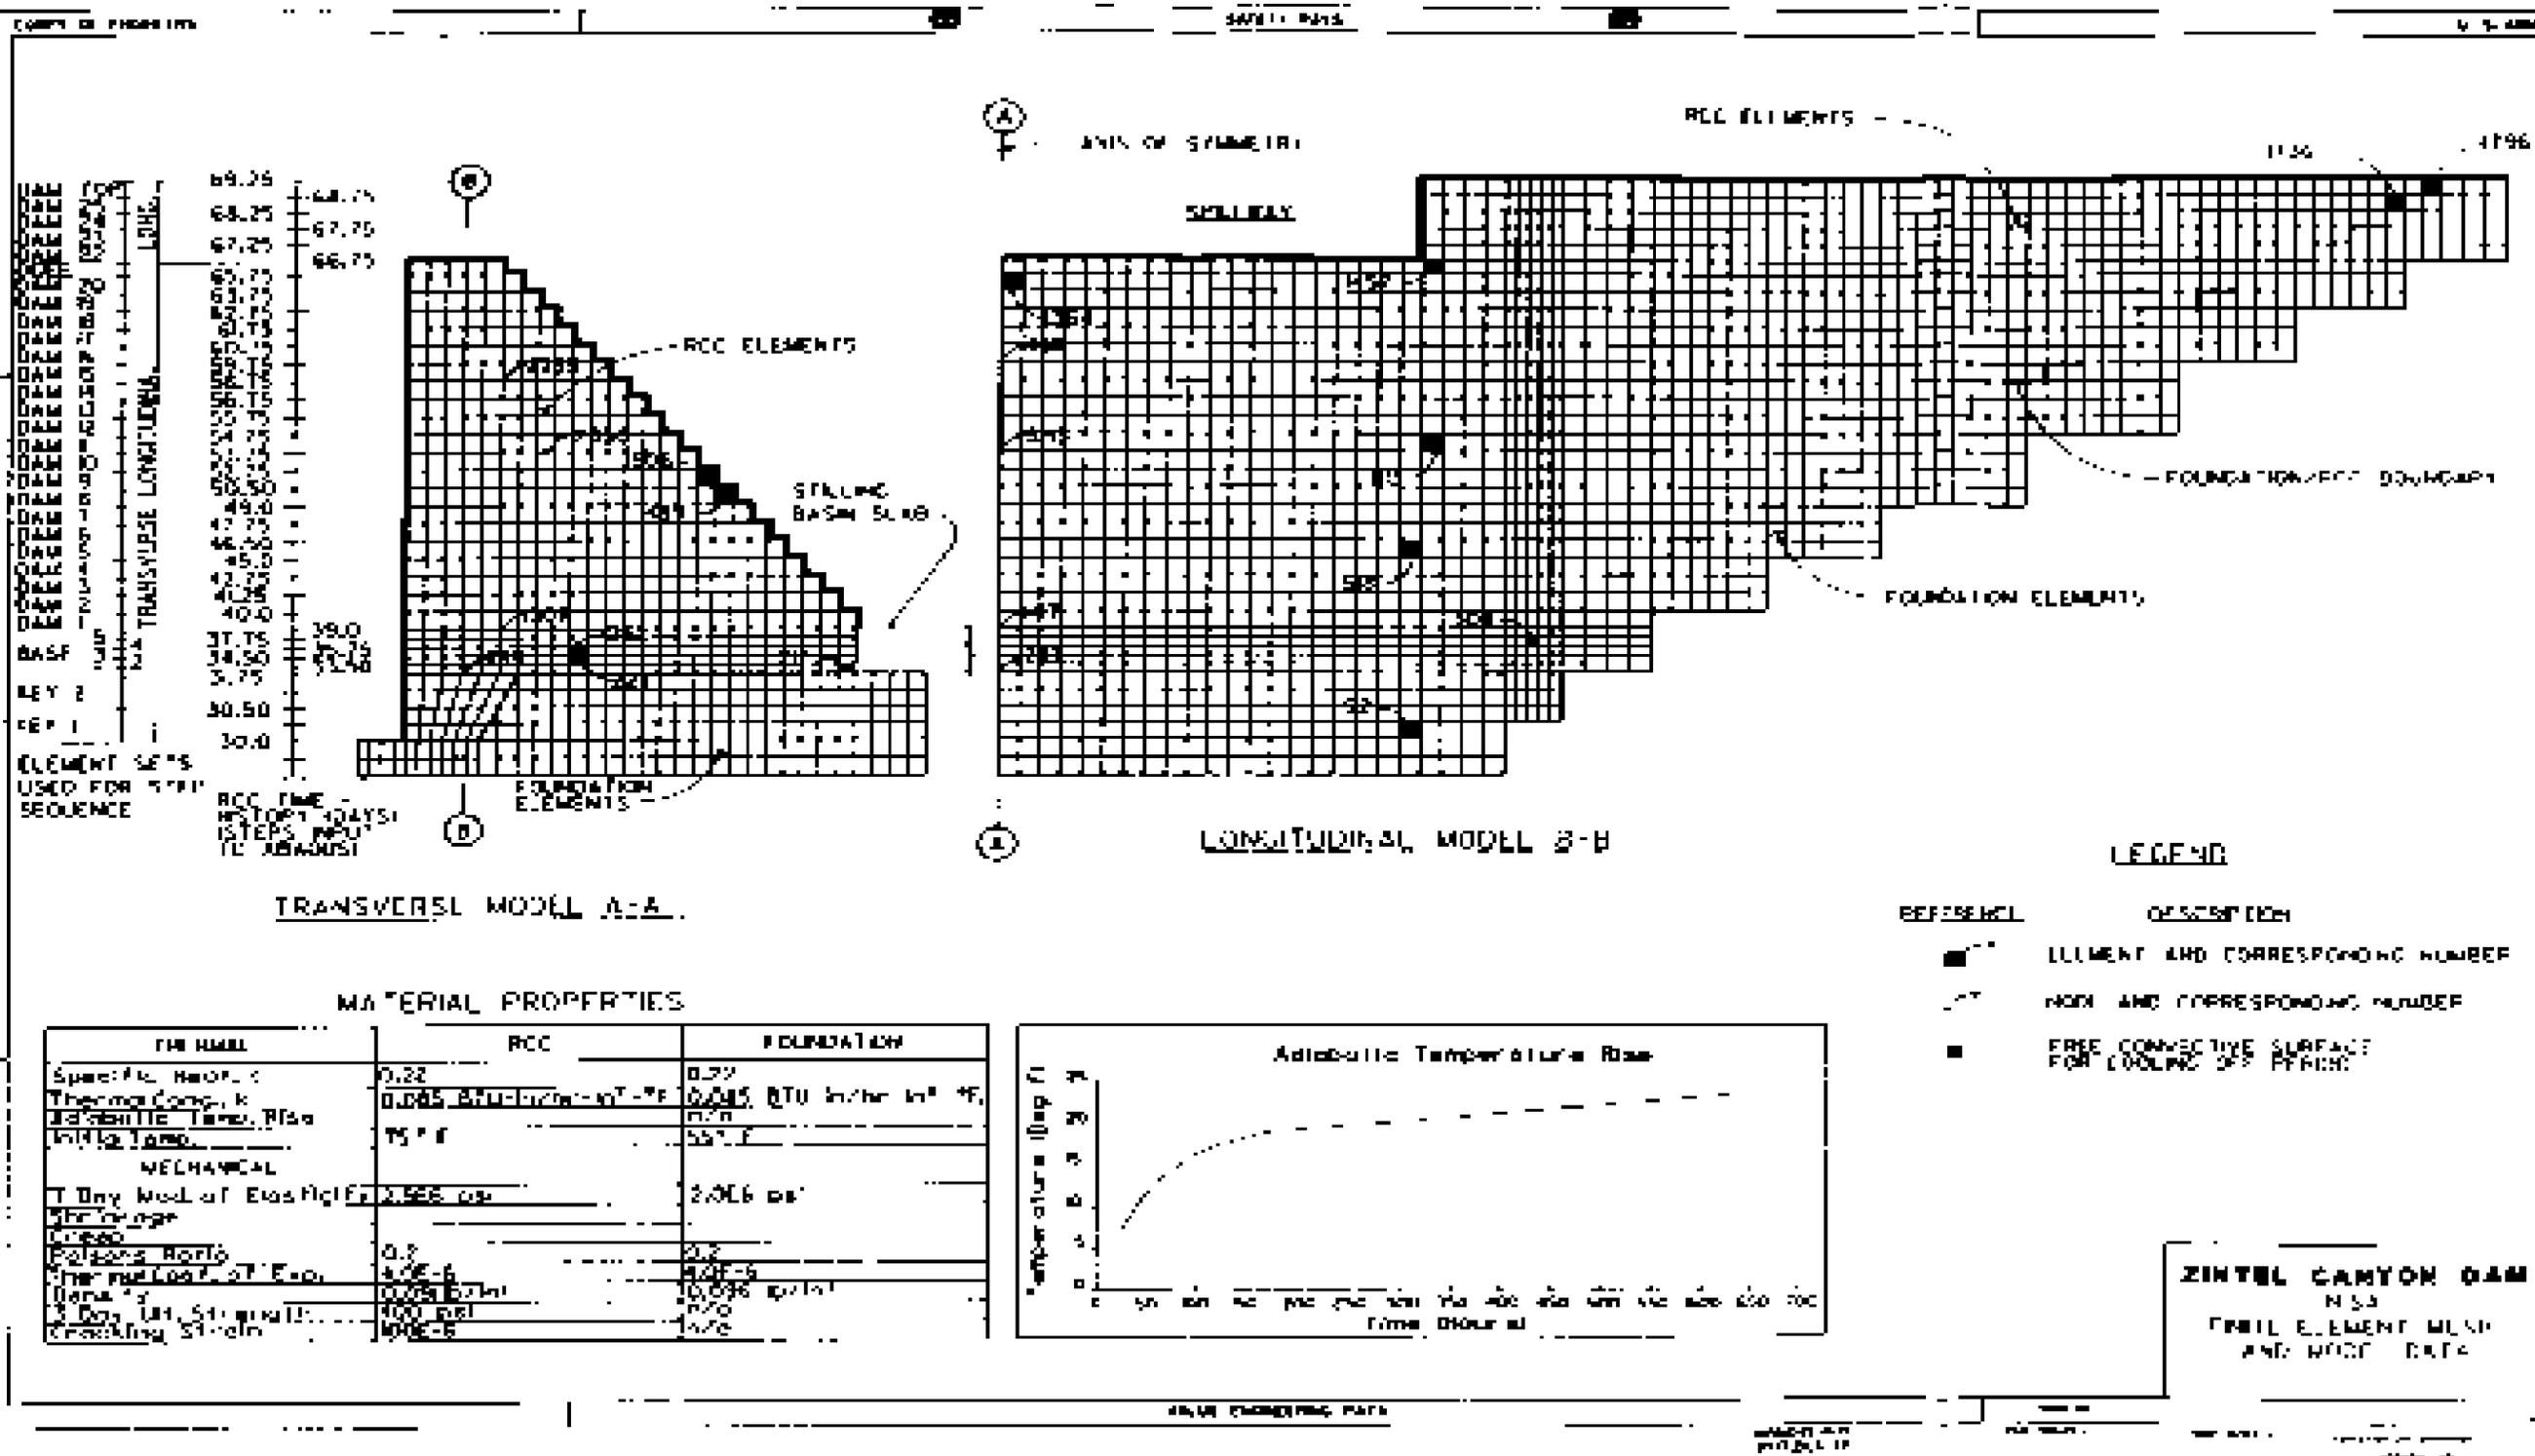


Figure A-1. Finite element mesh and model data

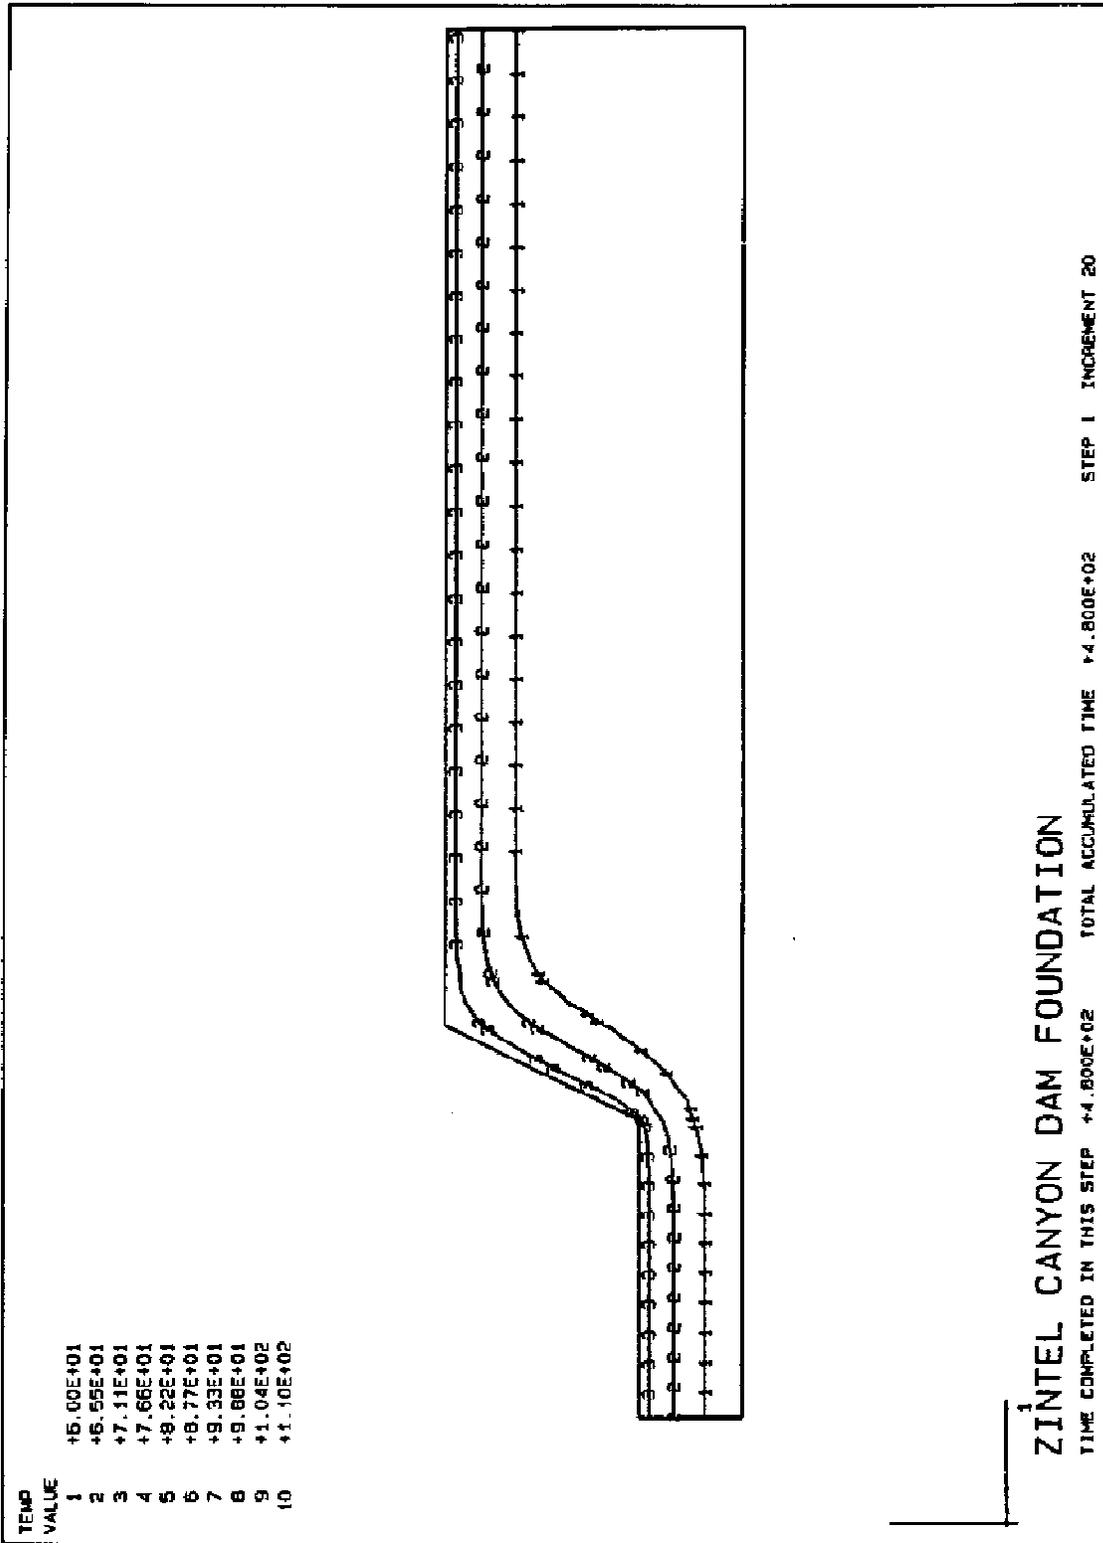


Figure A-2. Temperature contours transverse model, Zintel Canyon Dam foundation

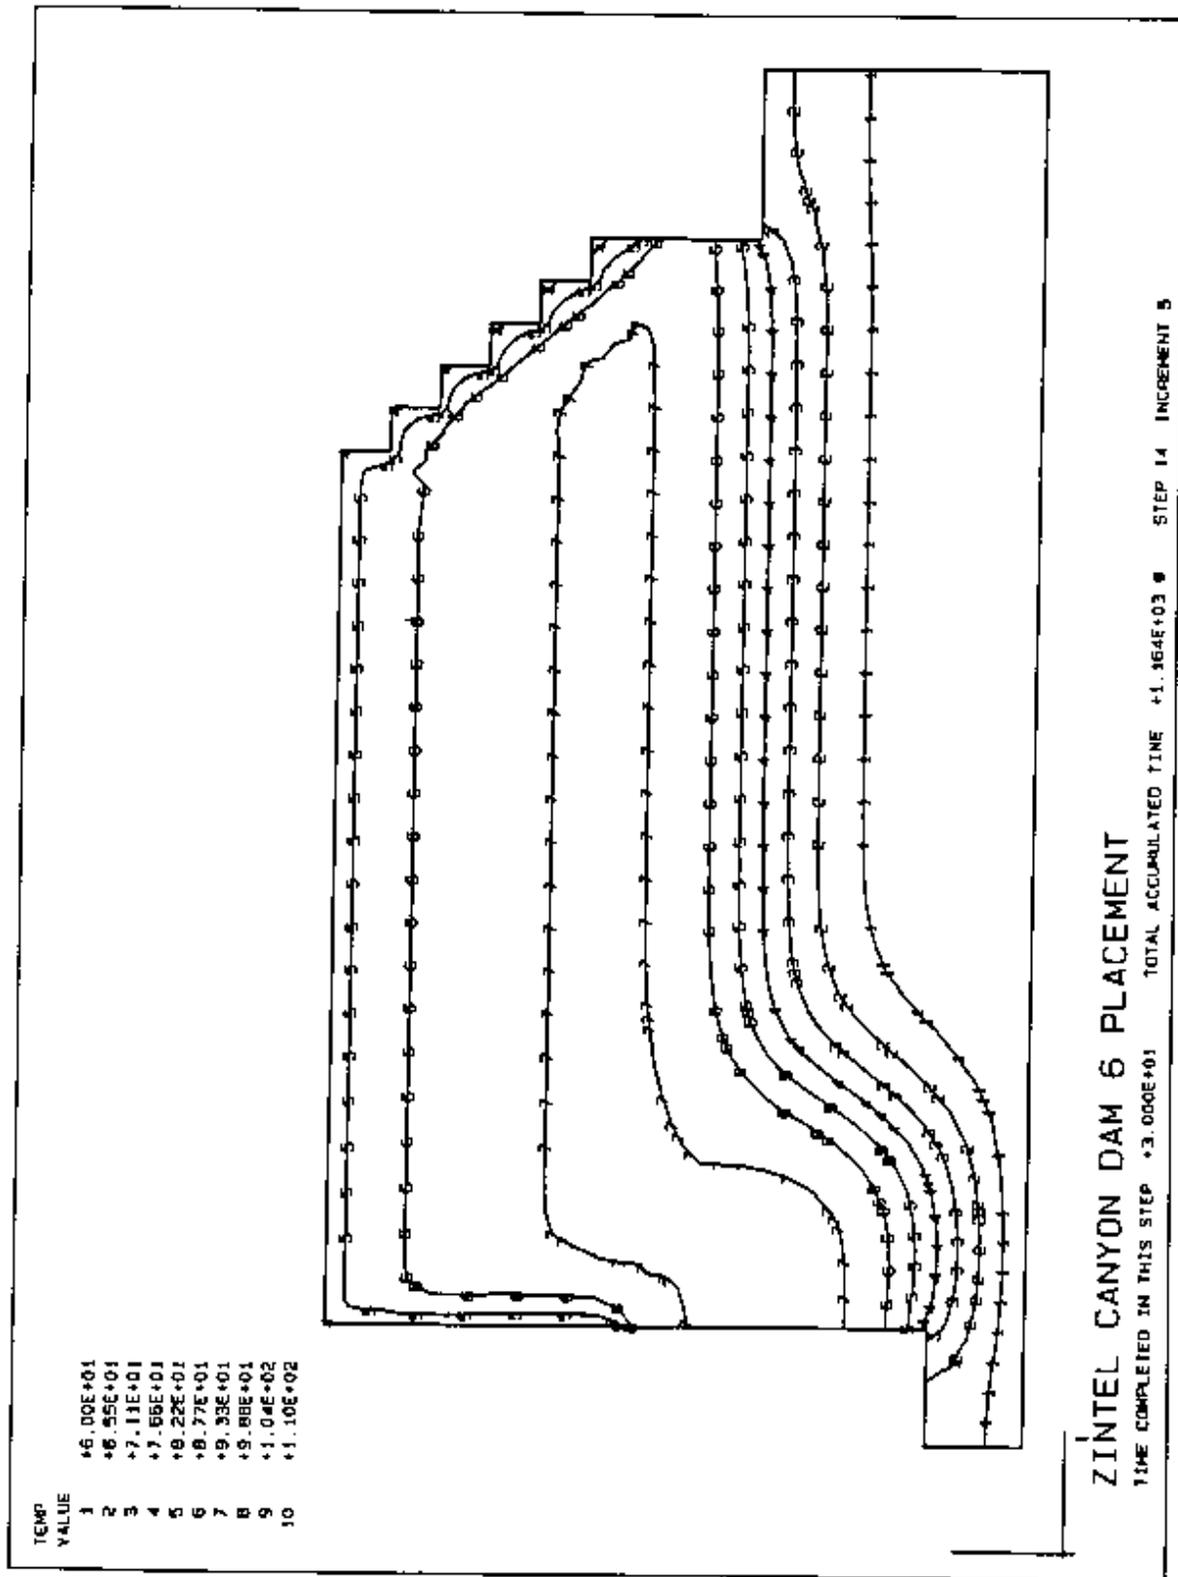


Figure A-3. Temperature contours transverse model, Zintel Canyon Dam 6 placement

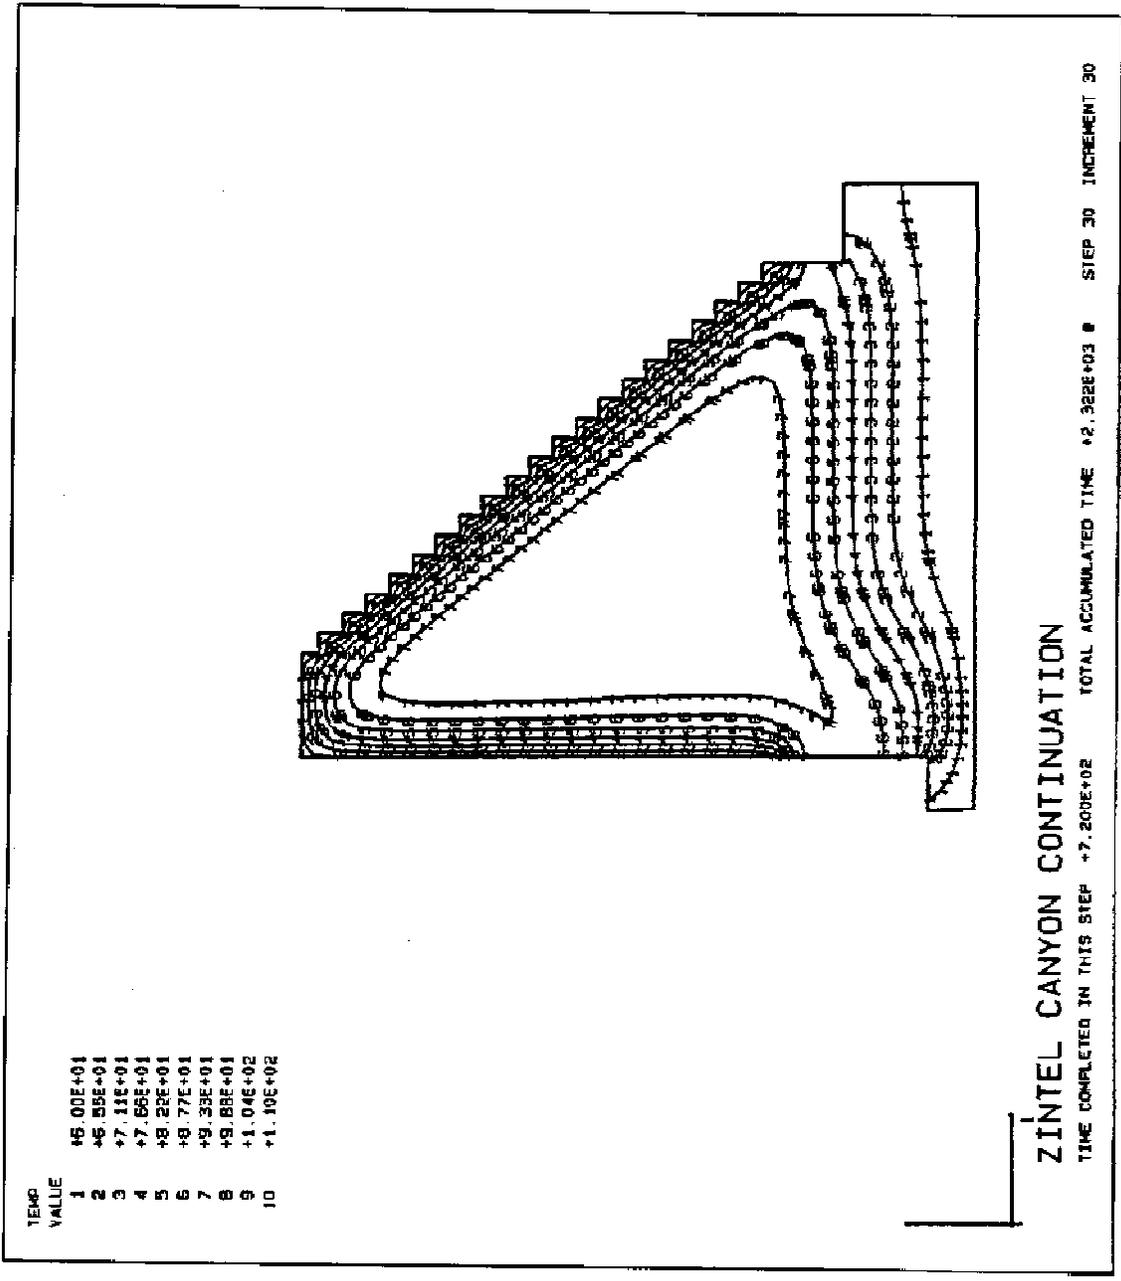


Figure A-5. Temperature contours transverse model, Zintel Canyon Dam continuation, step 30

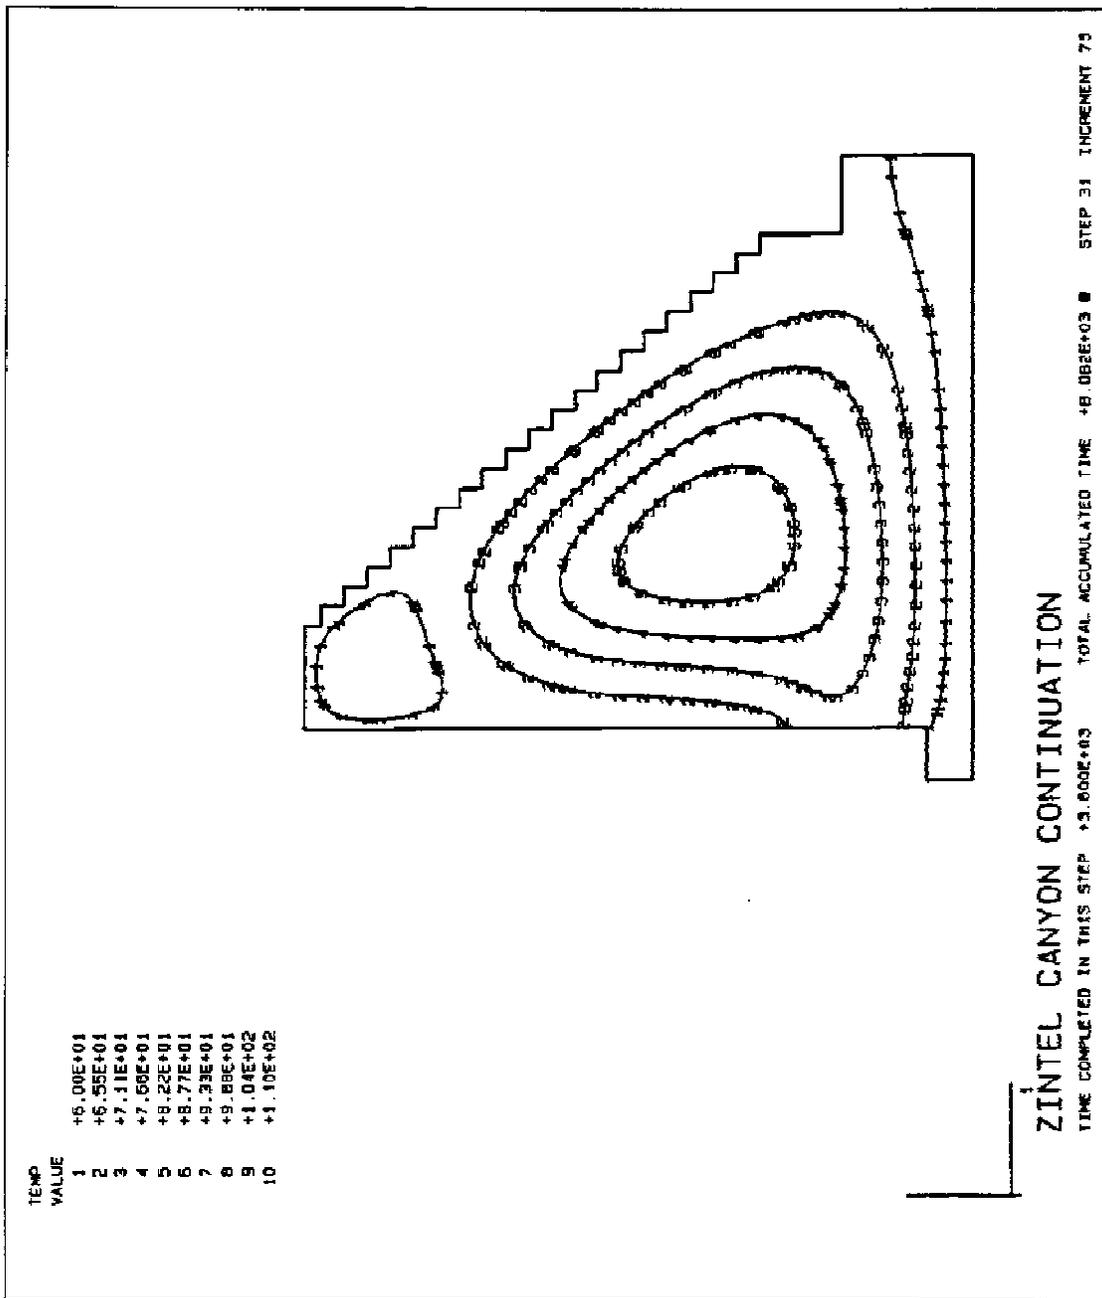


Figure A-6. Temperature contours transverse model, Zintel Canyon Dam continuation, step 31

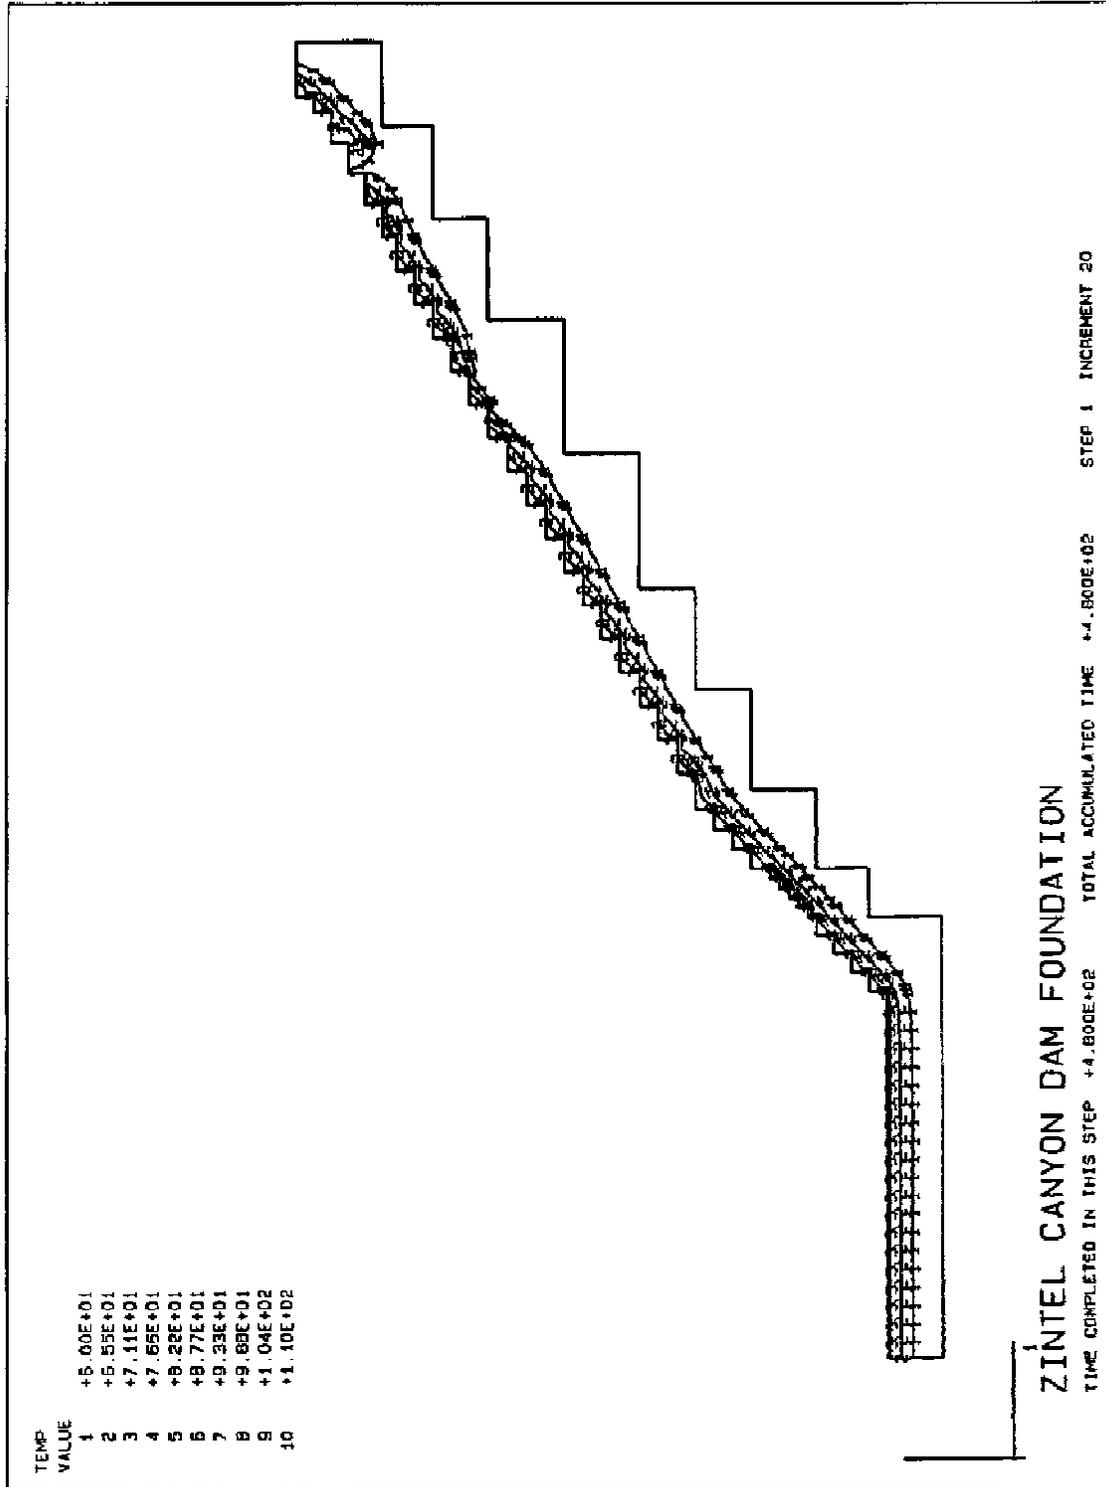


Figure A-7. Temperature contours longitudinal model, Zintel Canyon Dam foundation

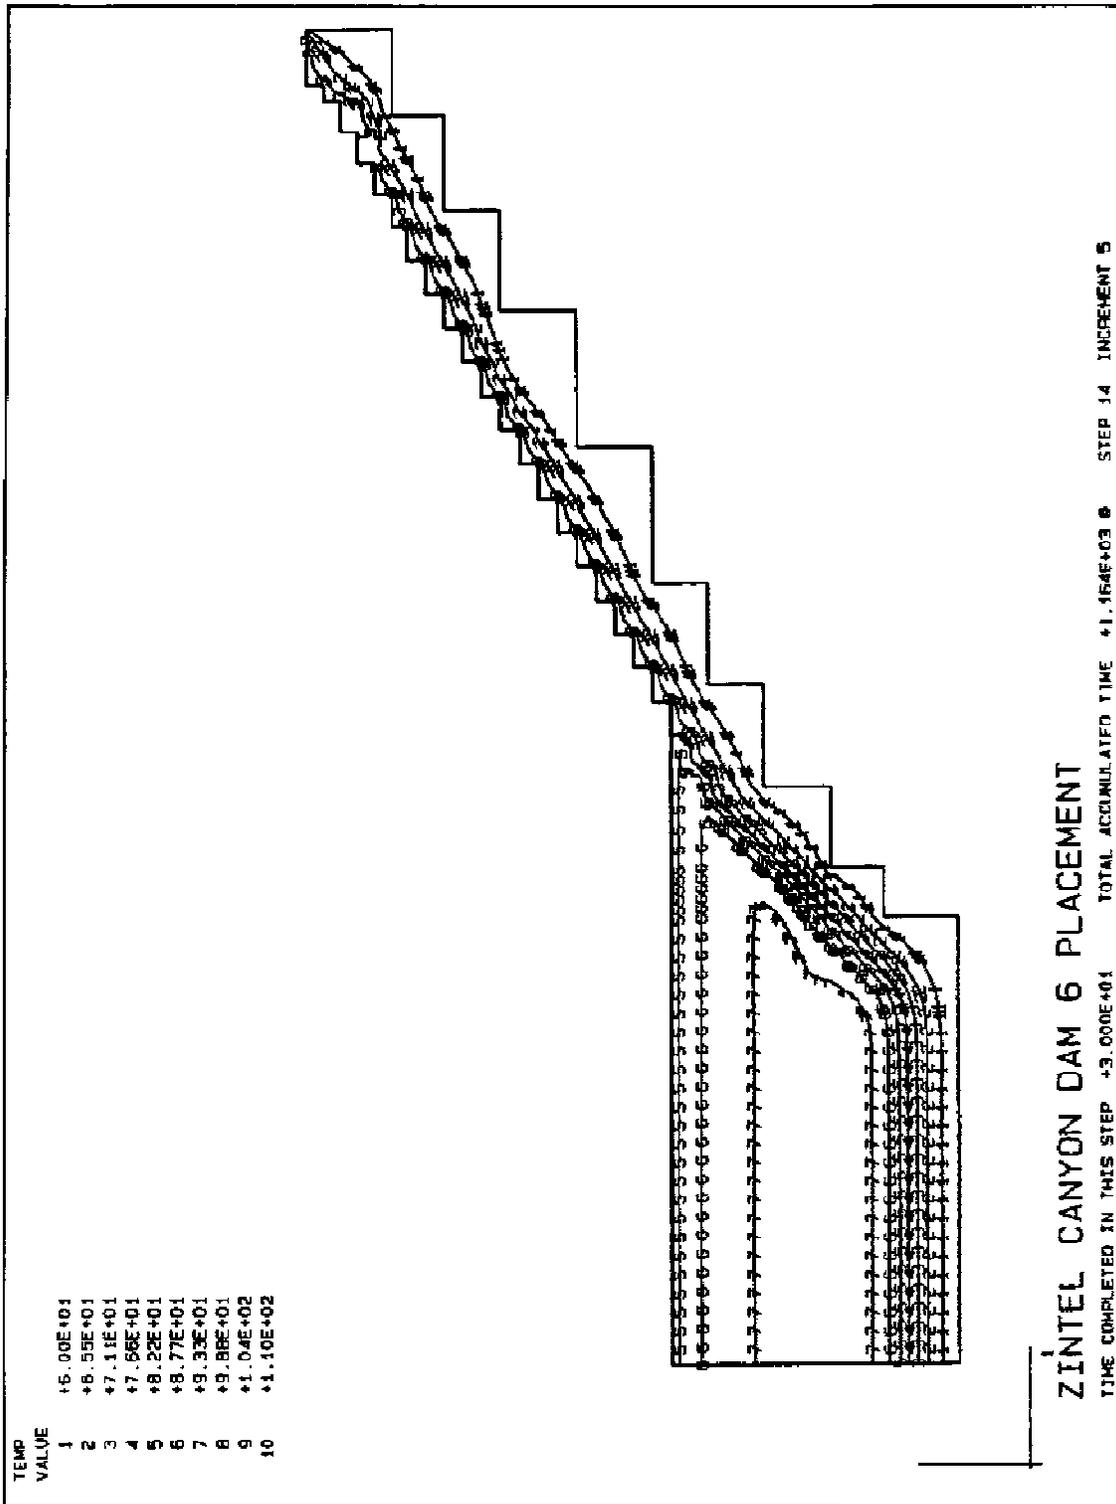


Figure A-8. Temperature contours longitudinal model, Zintel Canyon Dam 6 placement

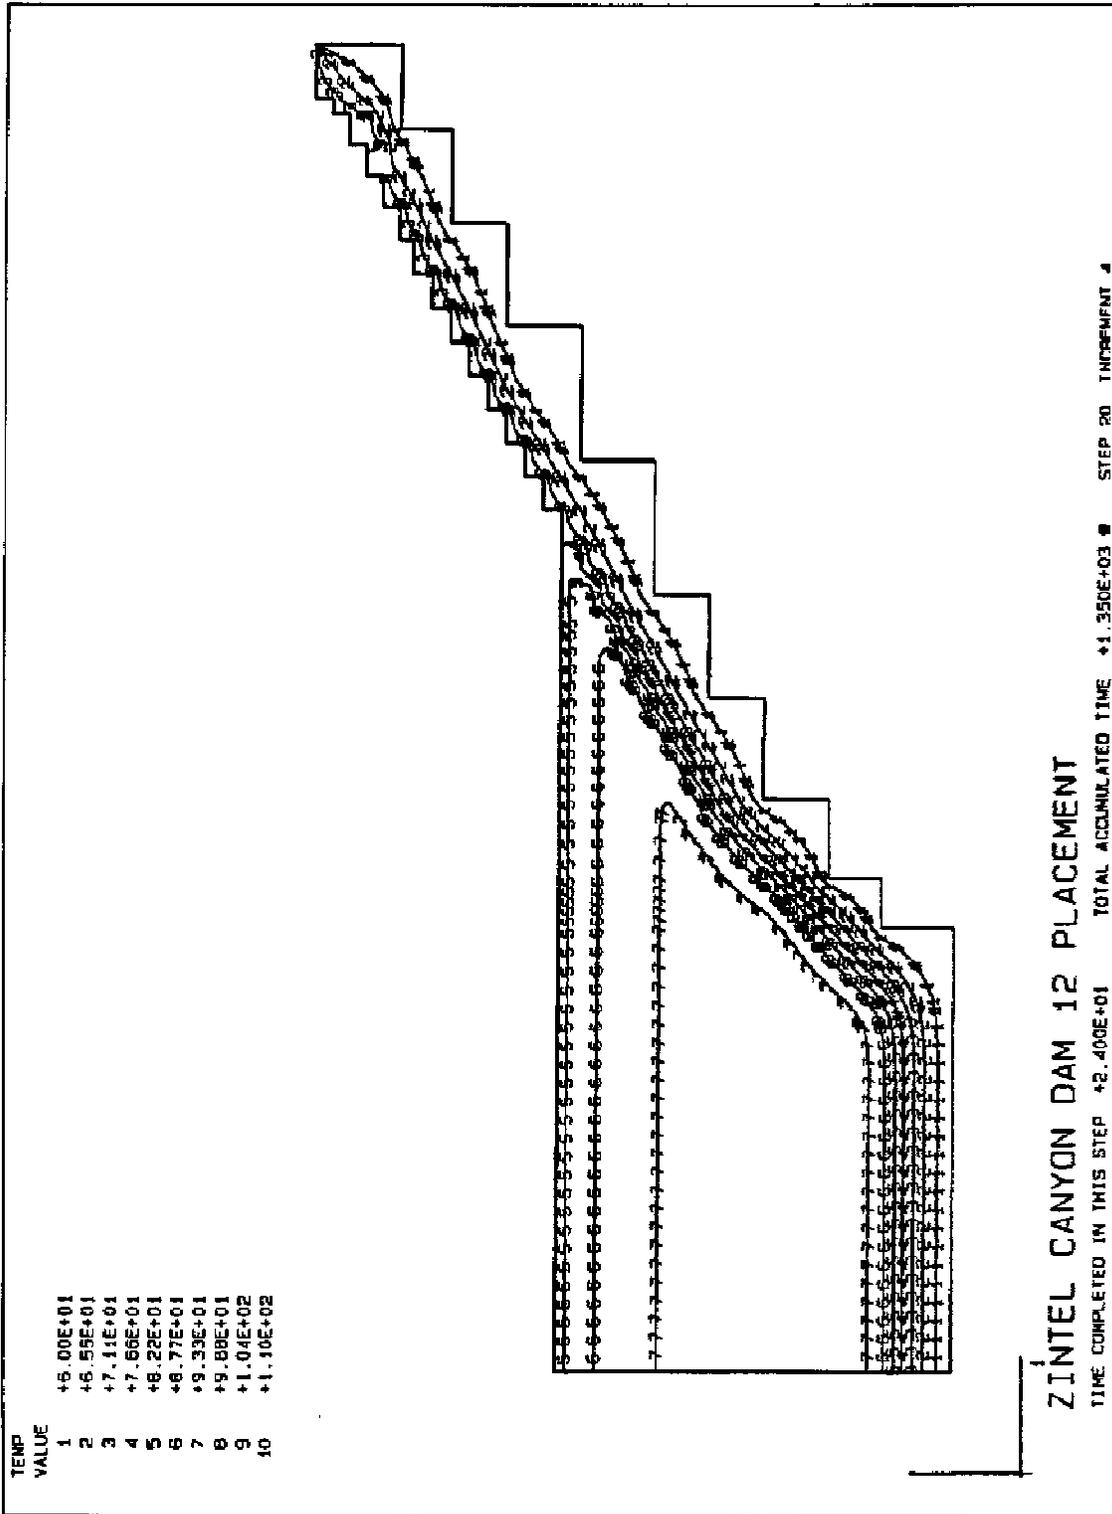


Figure A-6. Temperature contours longitudinal model, Zintel Canyon Dam 12 placement

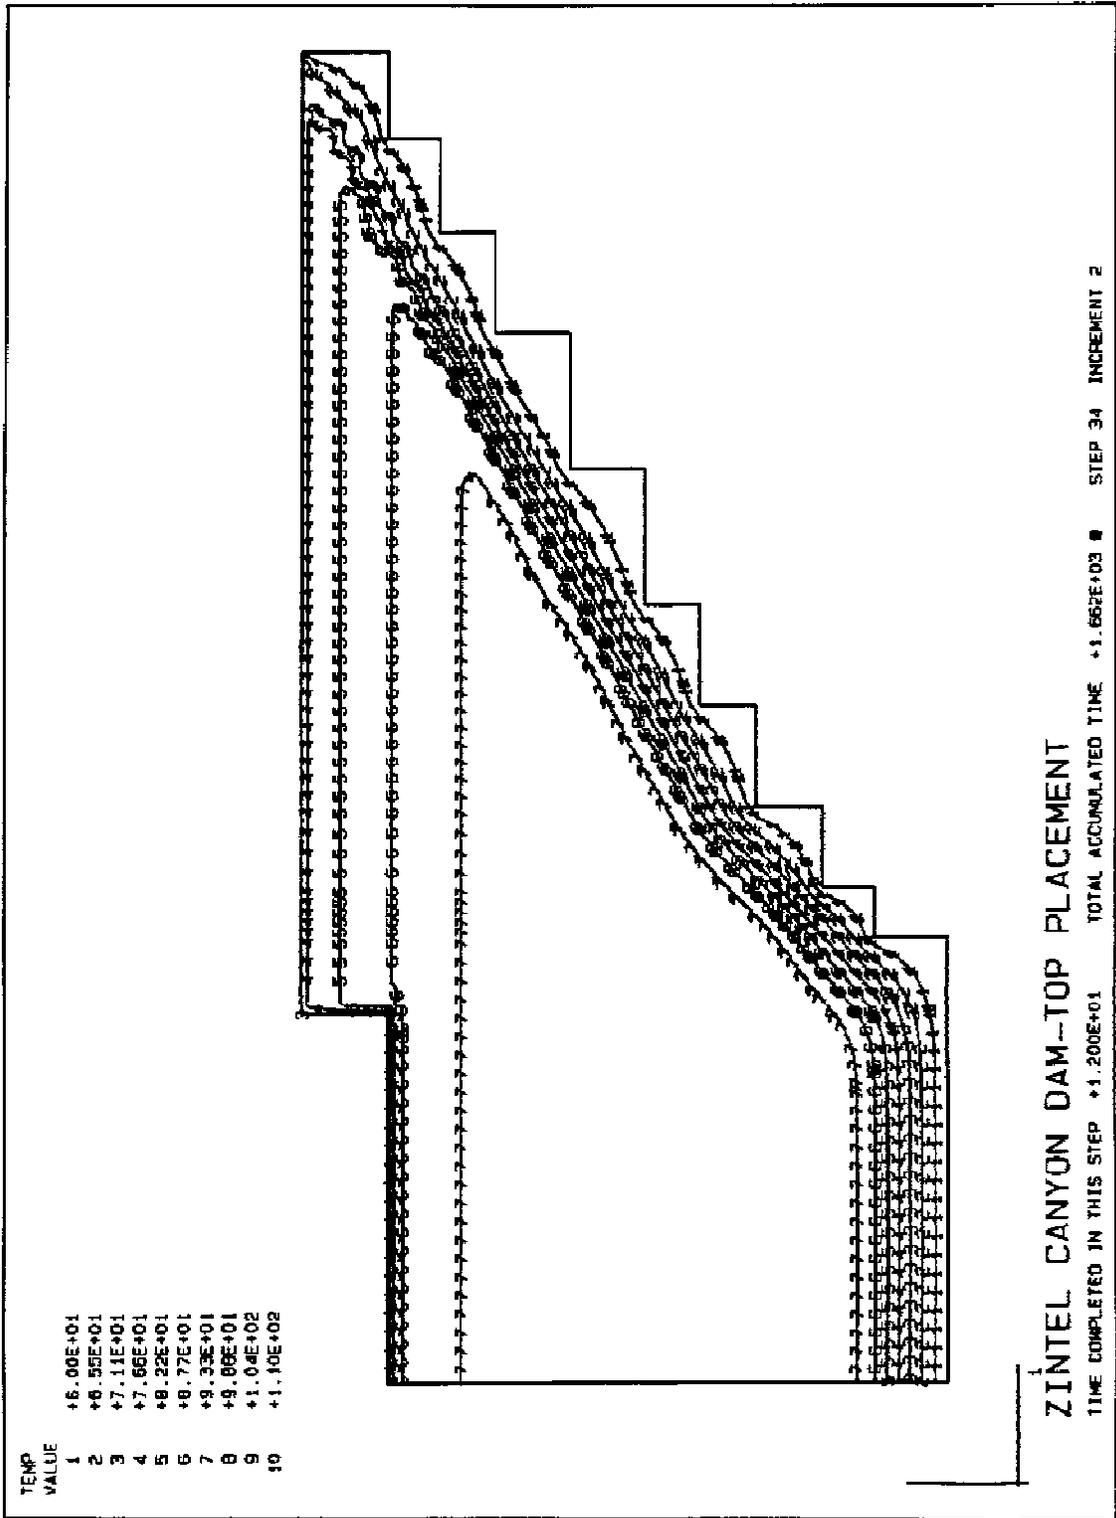


Figure A-10. Temperature contours longitudinal model, Zintel Canyon Dam-top placement

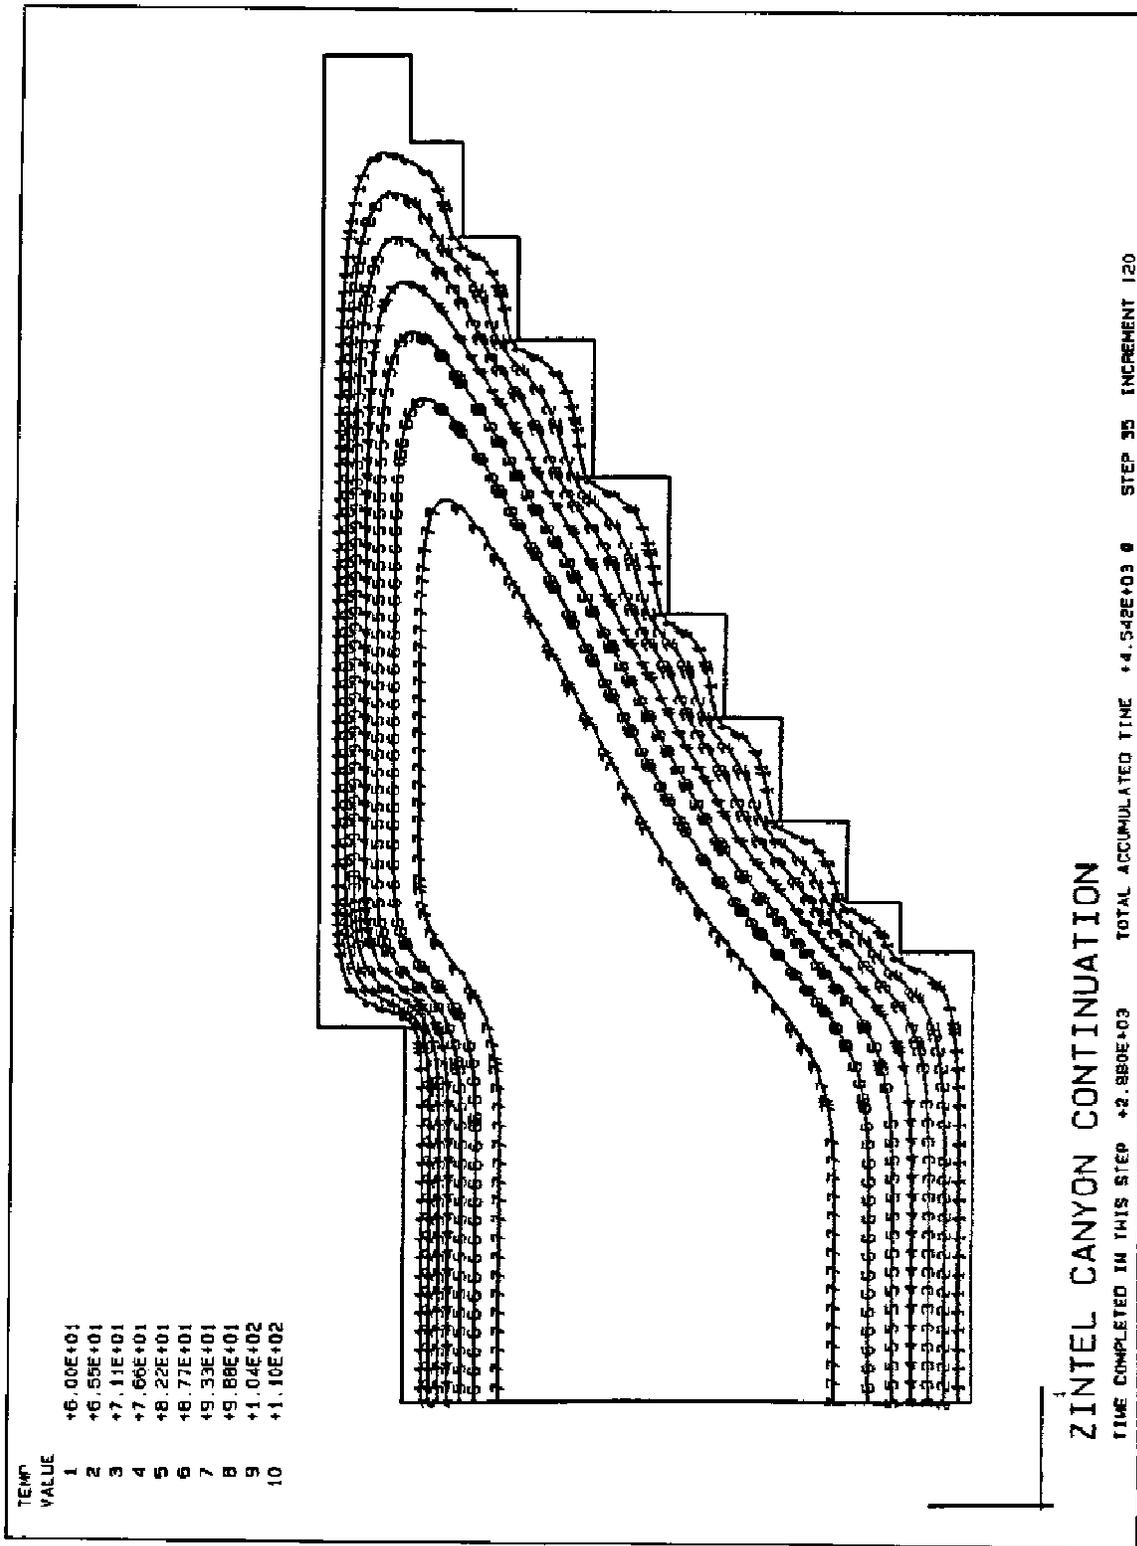


Figure A-11. Temperature contours longitudinal model, Zintel Canyon continuation


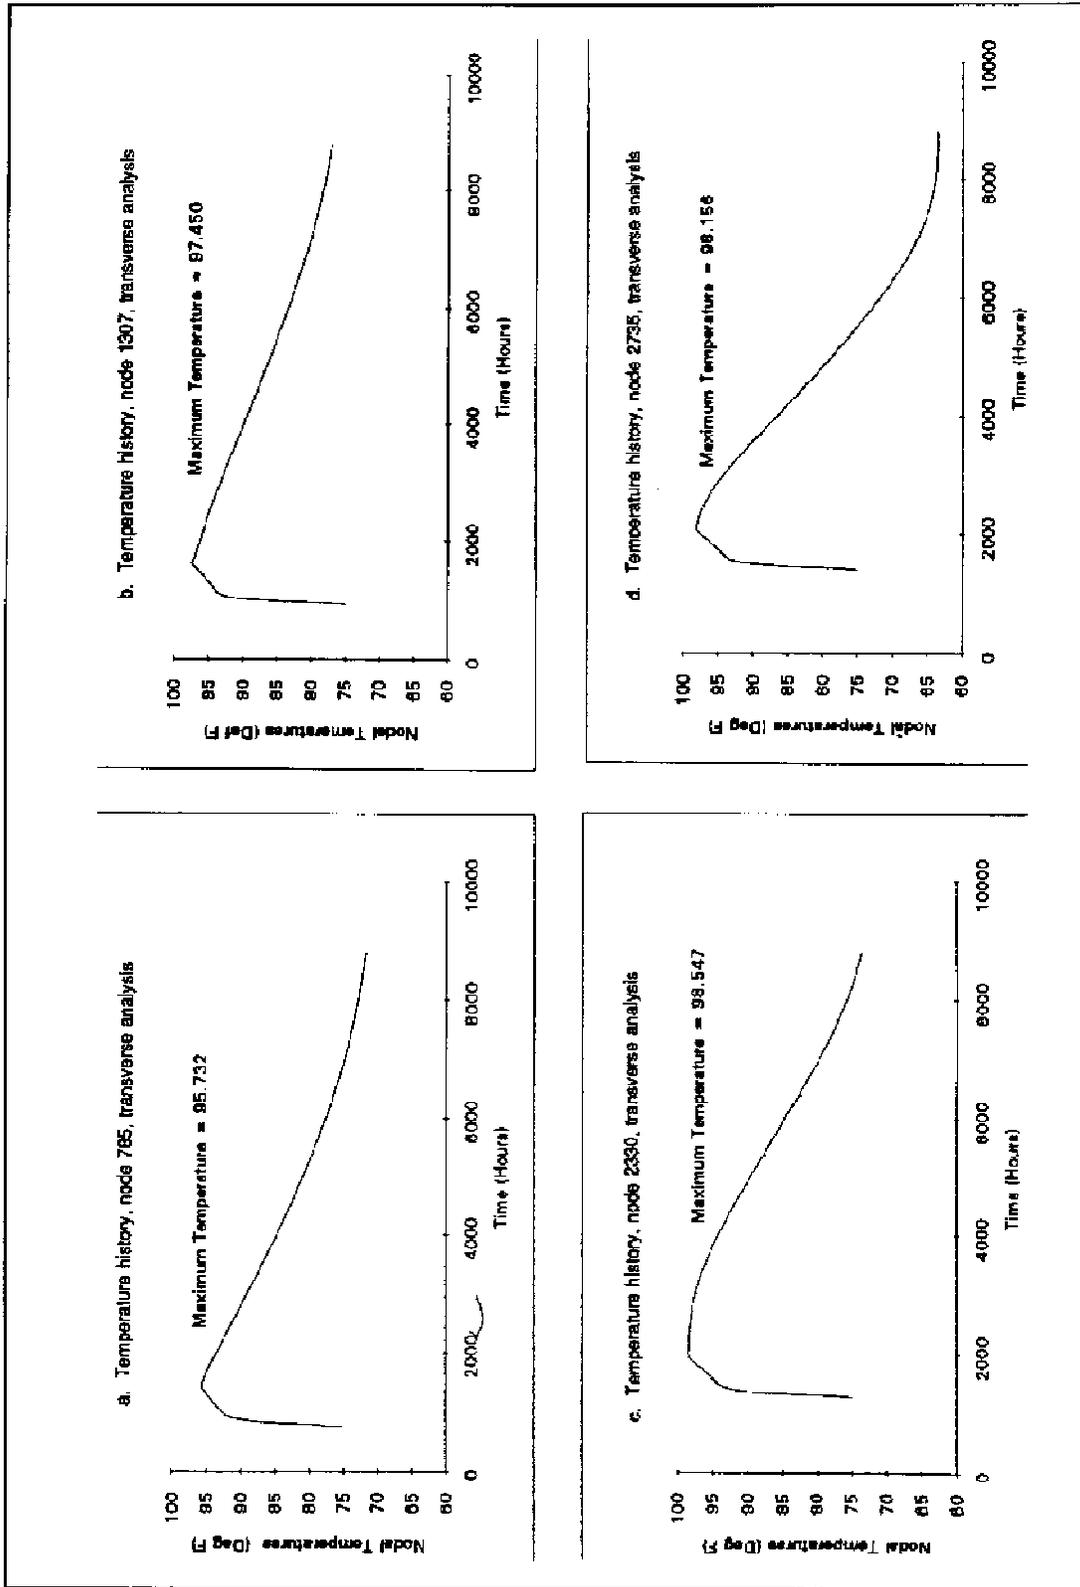


Figure A-12. Transverse temperature histories

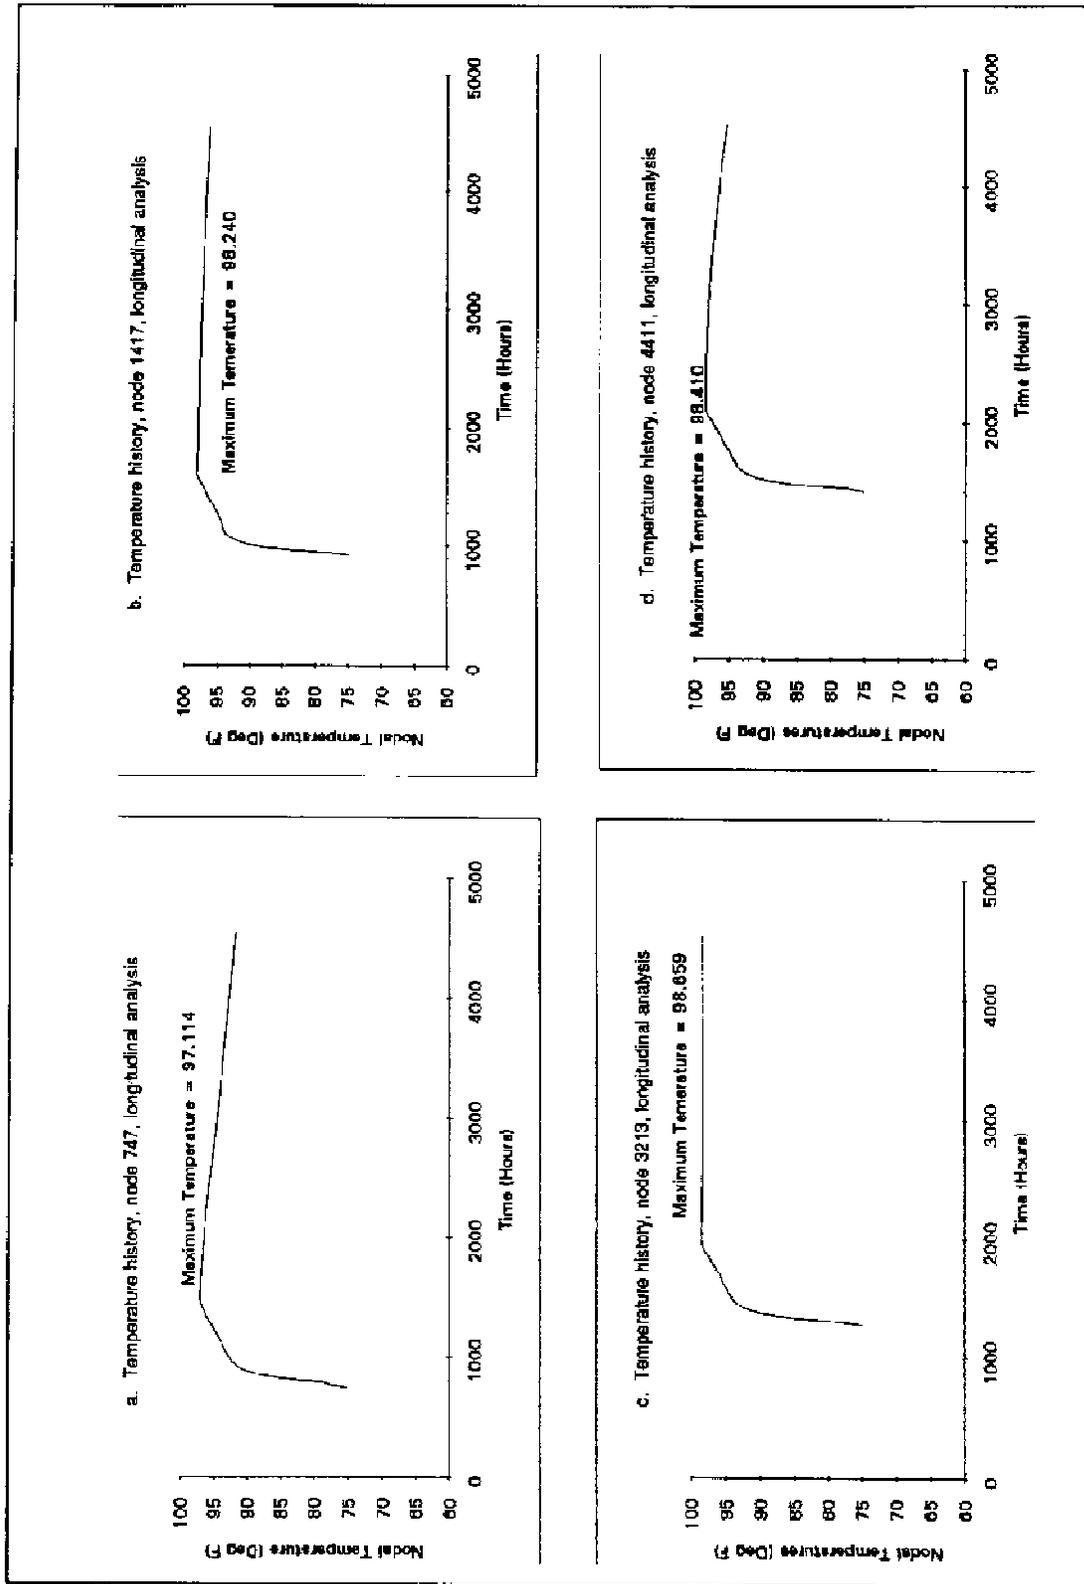

A-13. Nodal Temperature Histories

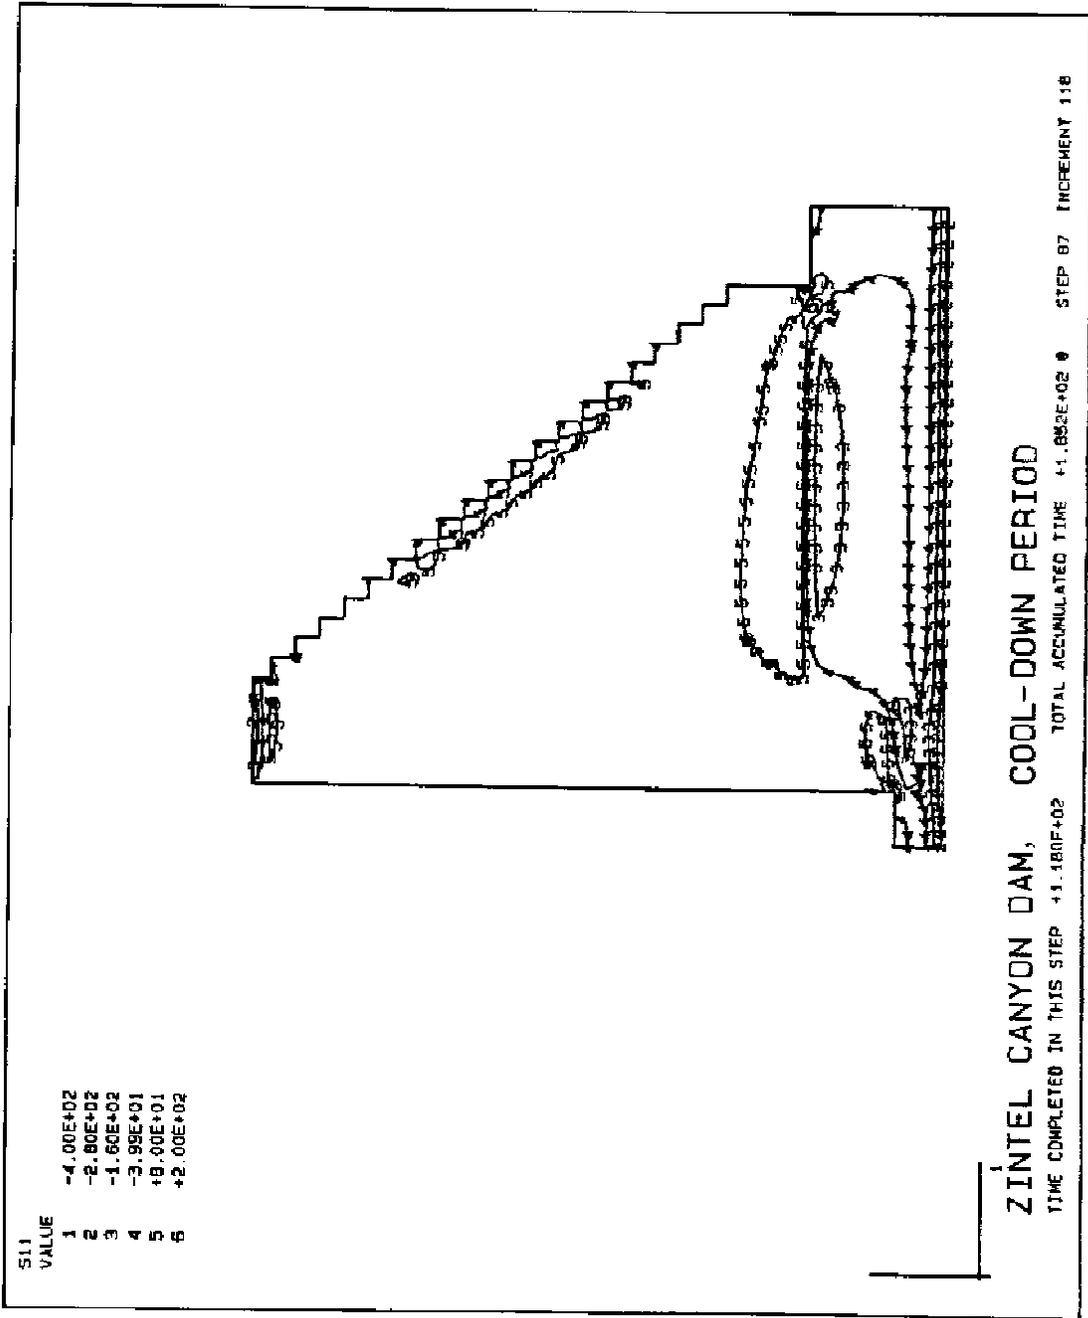


Figure A-14. Global "X" Stress Contours Transverse model, Zintel Canyon Dam, cool-down period

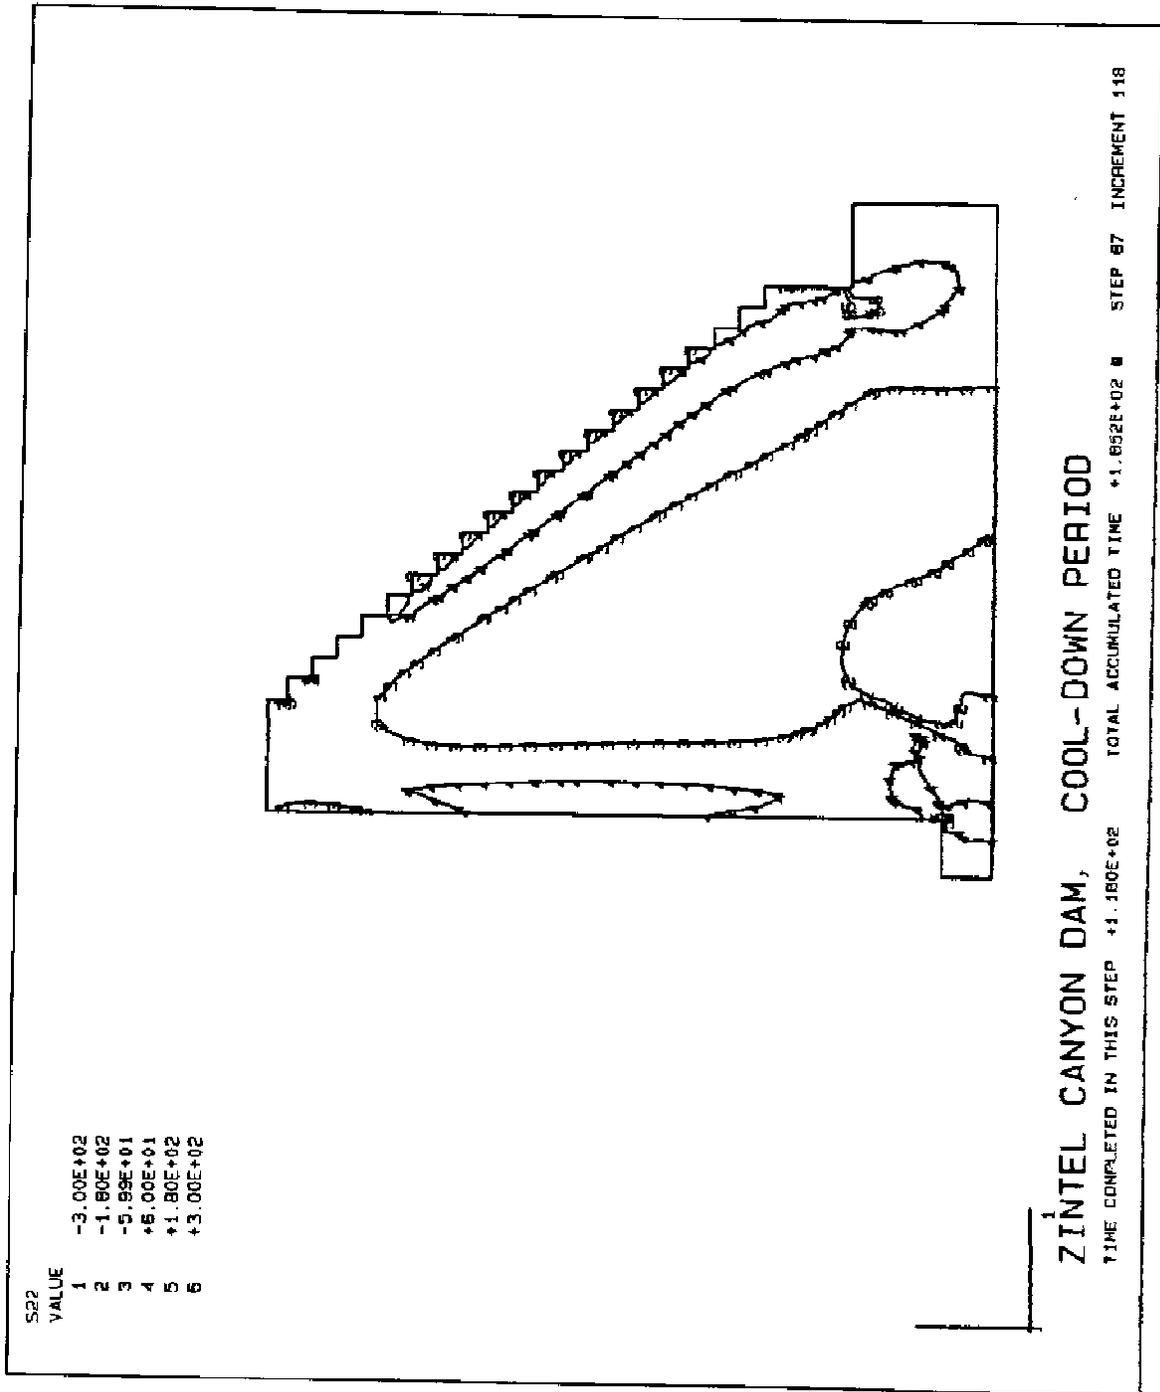


Figure A-15. Global "Y" Stress Contour Transverse Model, Zintel Canyon Dam, cool-down period

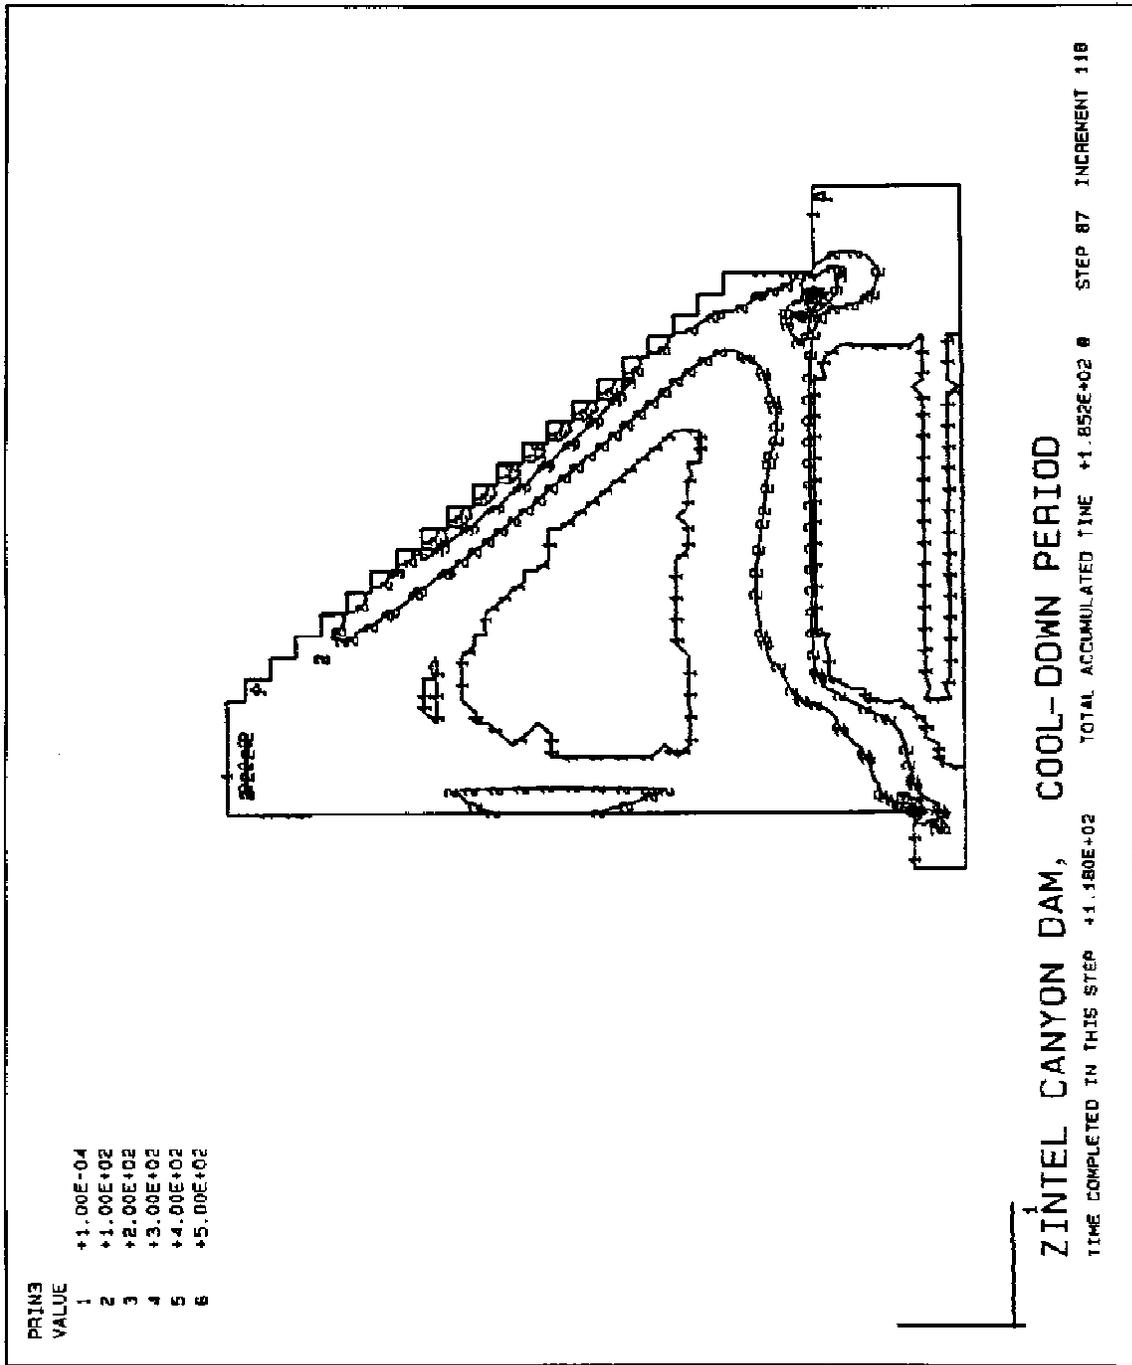


Figure A-16. Principle Stress Contours Transverse Model, Zintel Canyon Dam, cool-down period

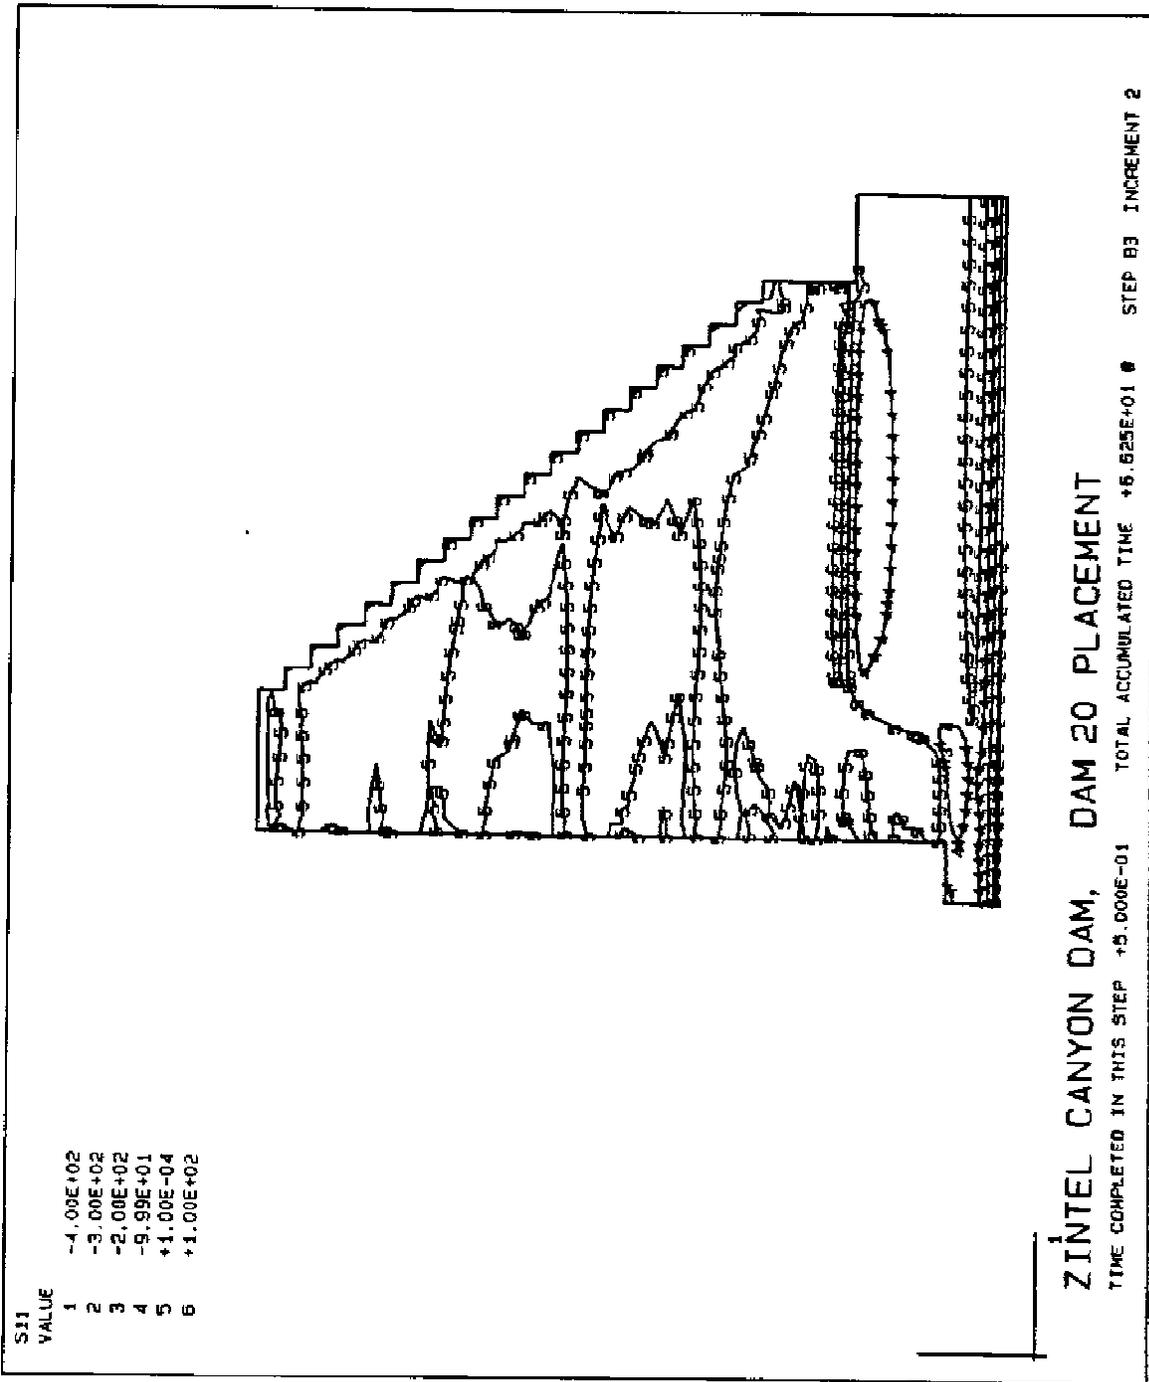


Figure A-17. Global "X" Stress Contours Transverse Model, Zintel Canyon Dam, Dam 20 placement

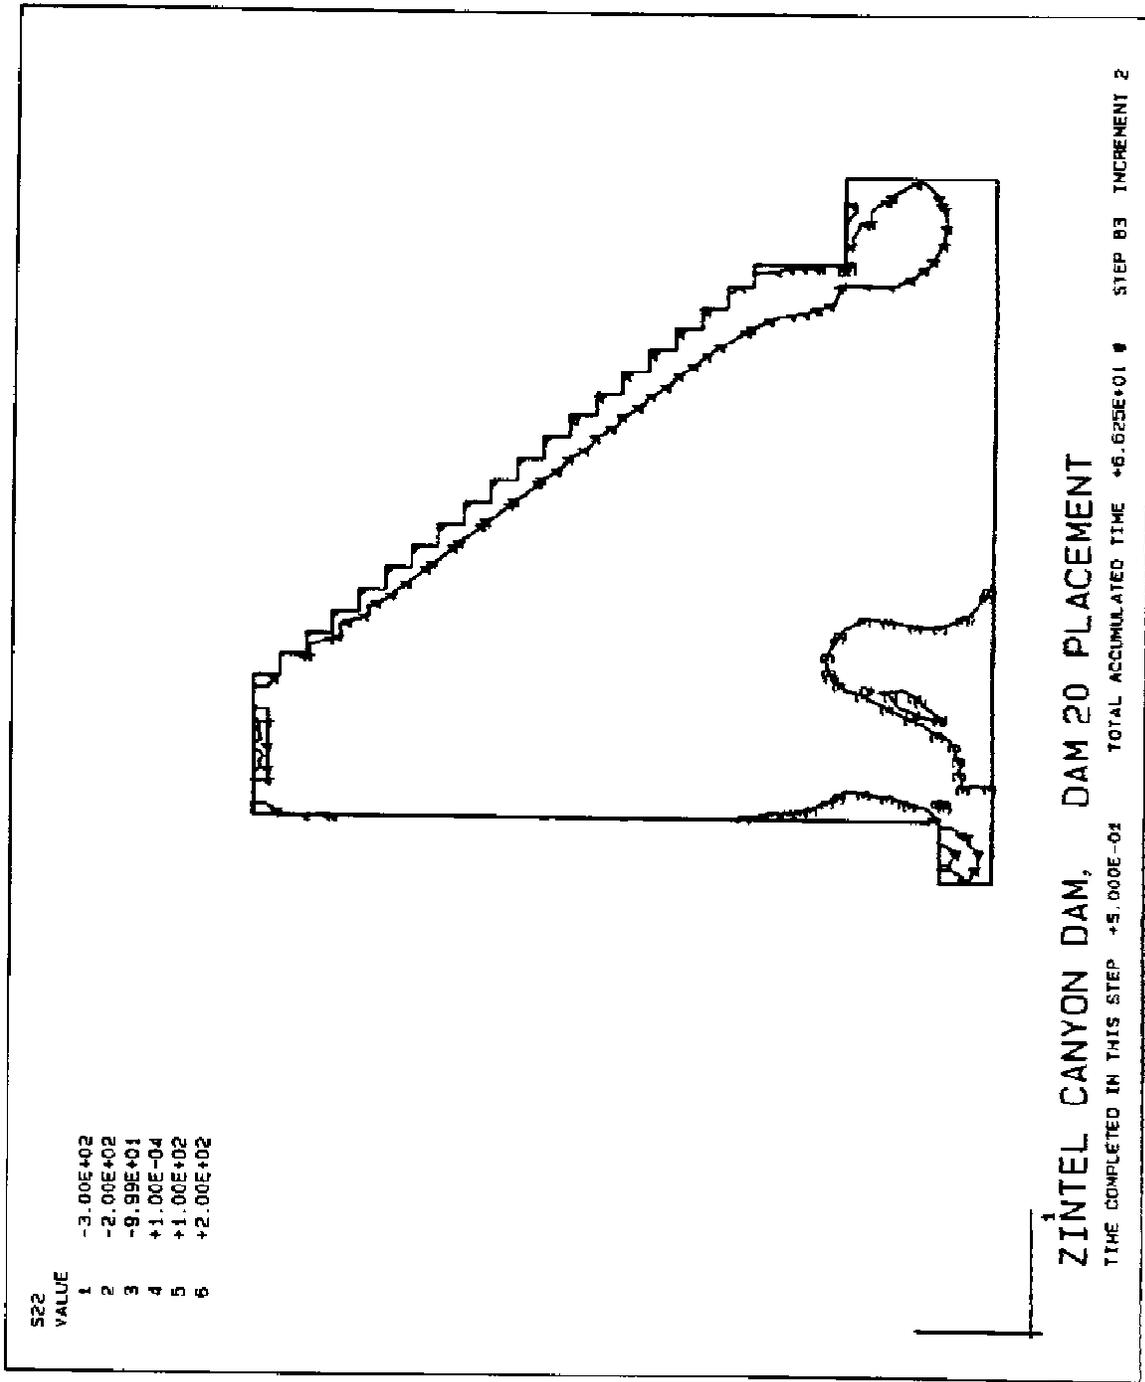


Figure A-19. Global "Y" Stress Contours Transverse Model, Zintel Canyon Dam, Dam 20 placement


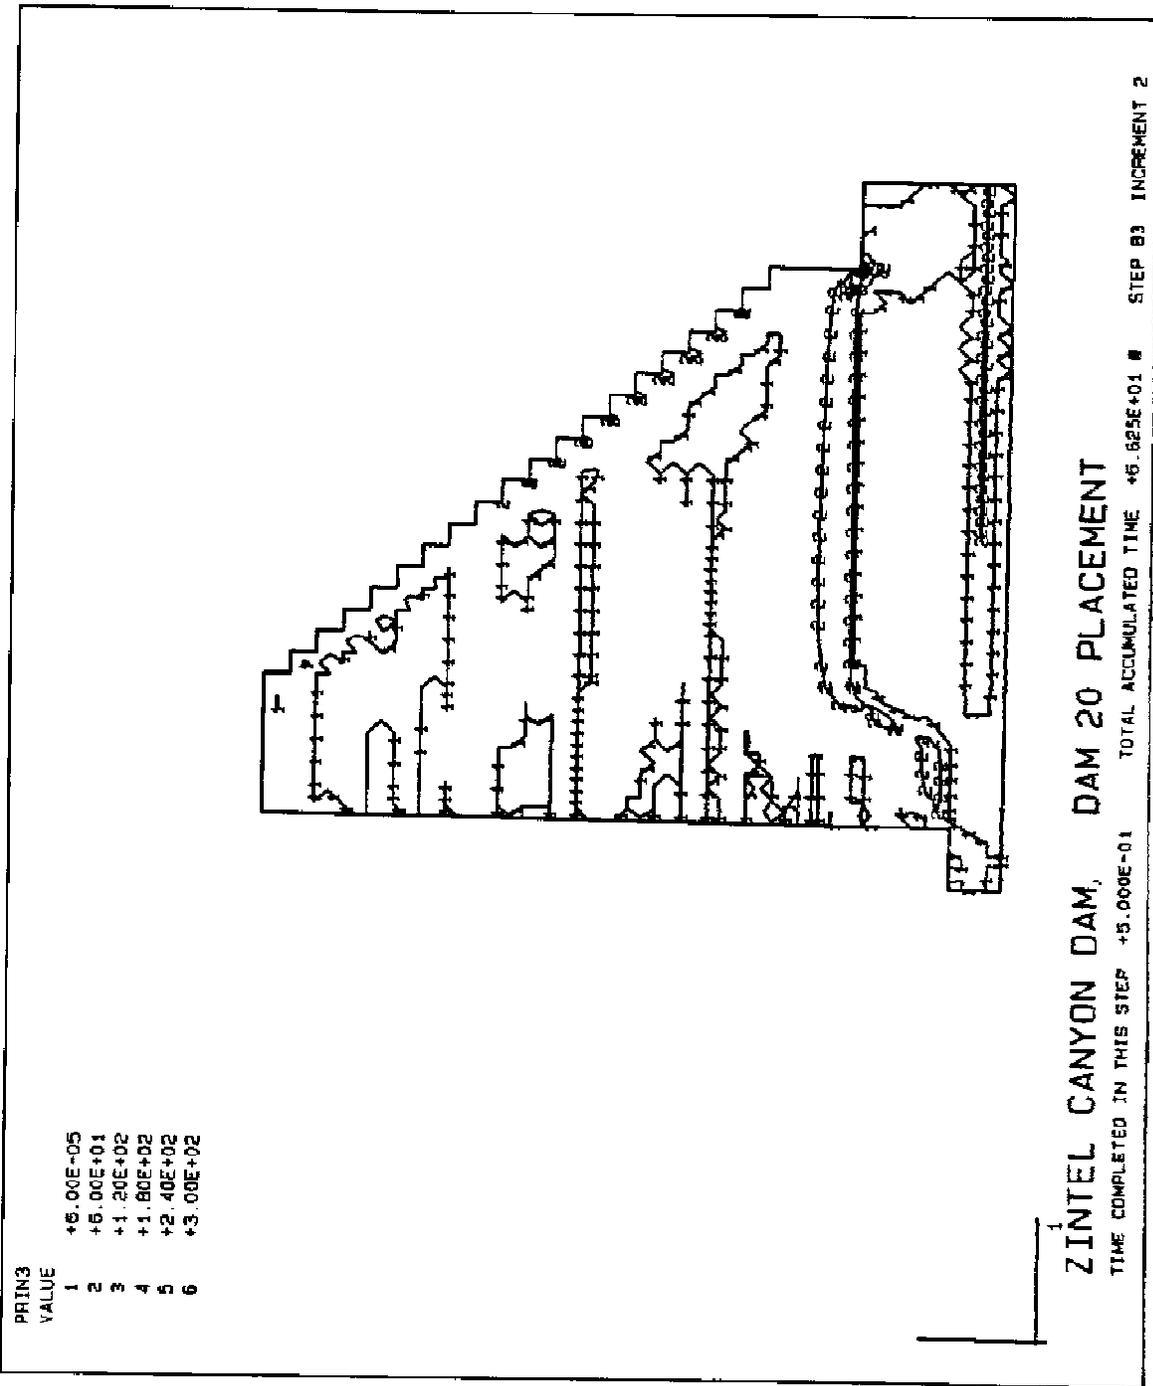


Figure A-19. Principle Stress Contours Transverse Modal, Zintel Canyon Dam, Dam 20 placement

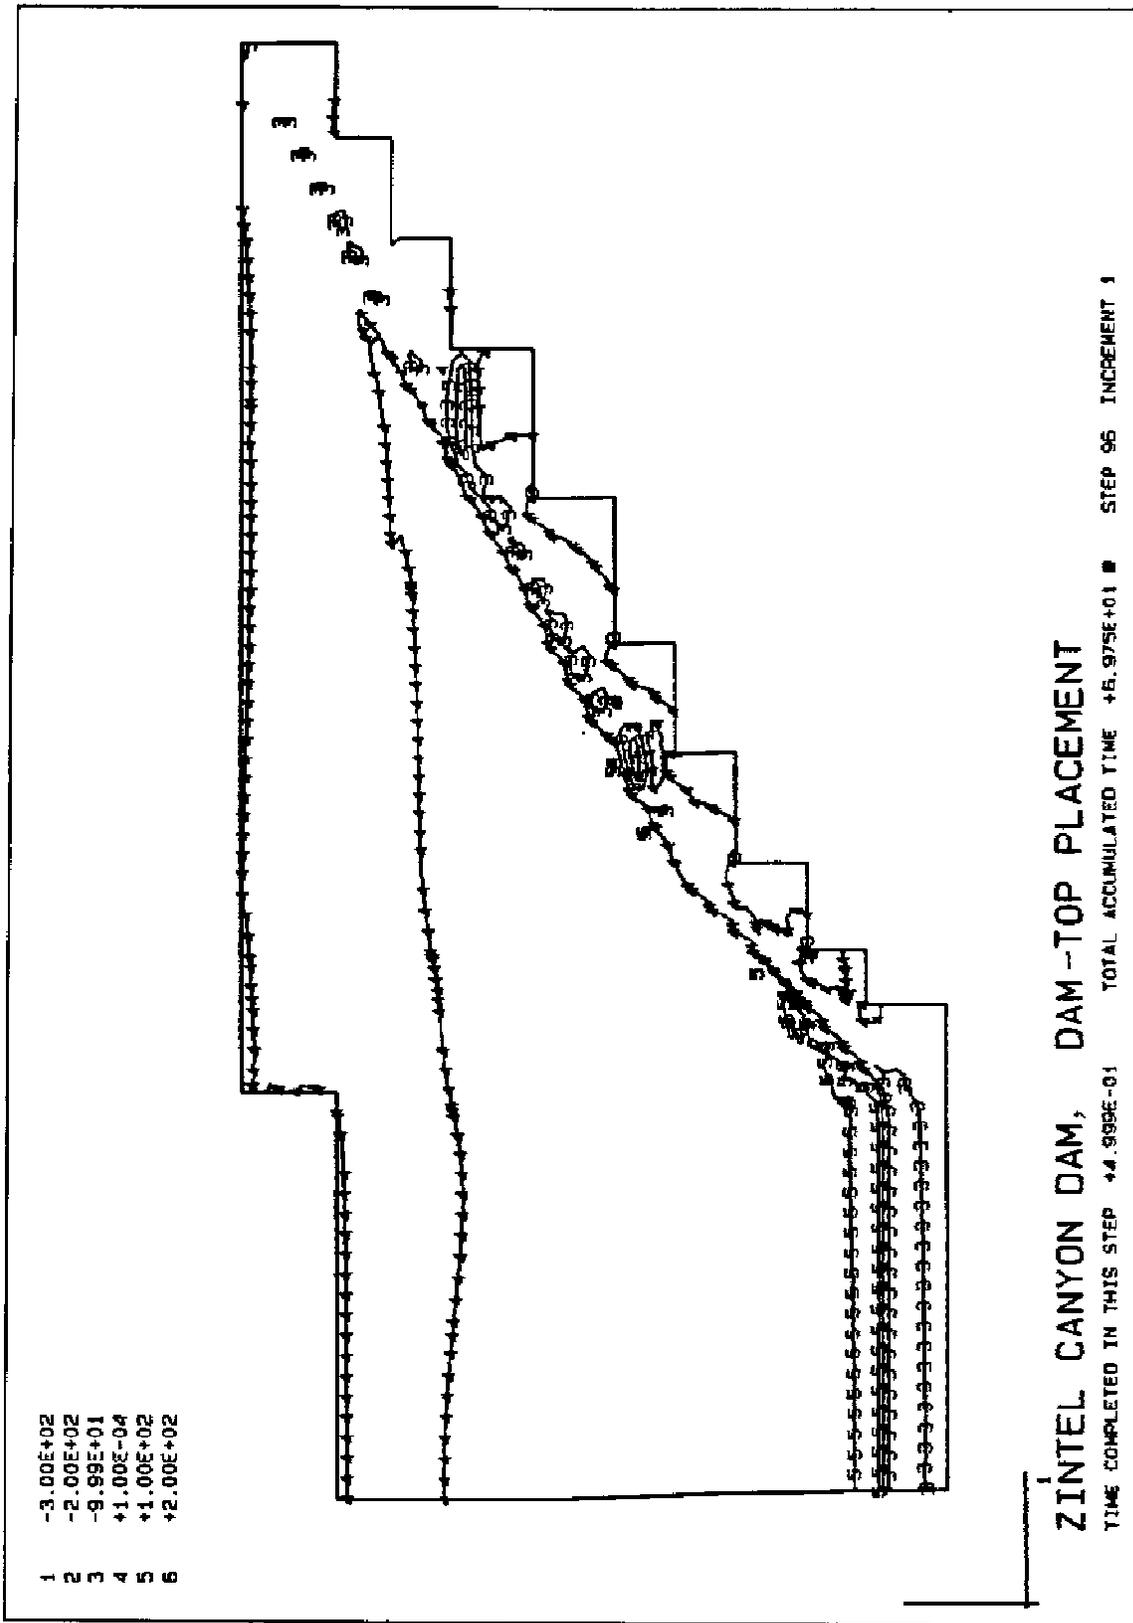

A-20. Global "X" Stress Contours Longitudinal Model, Zintel Canyon Dam, dam-top placement

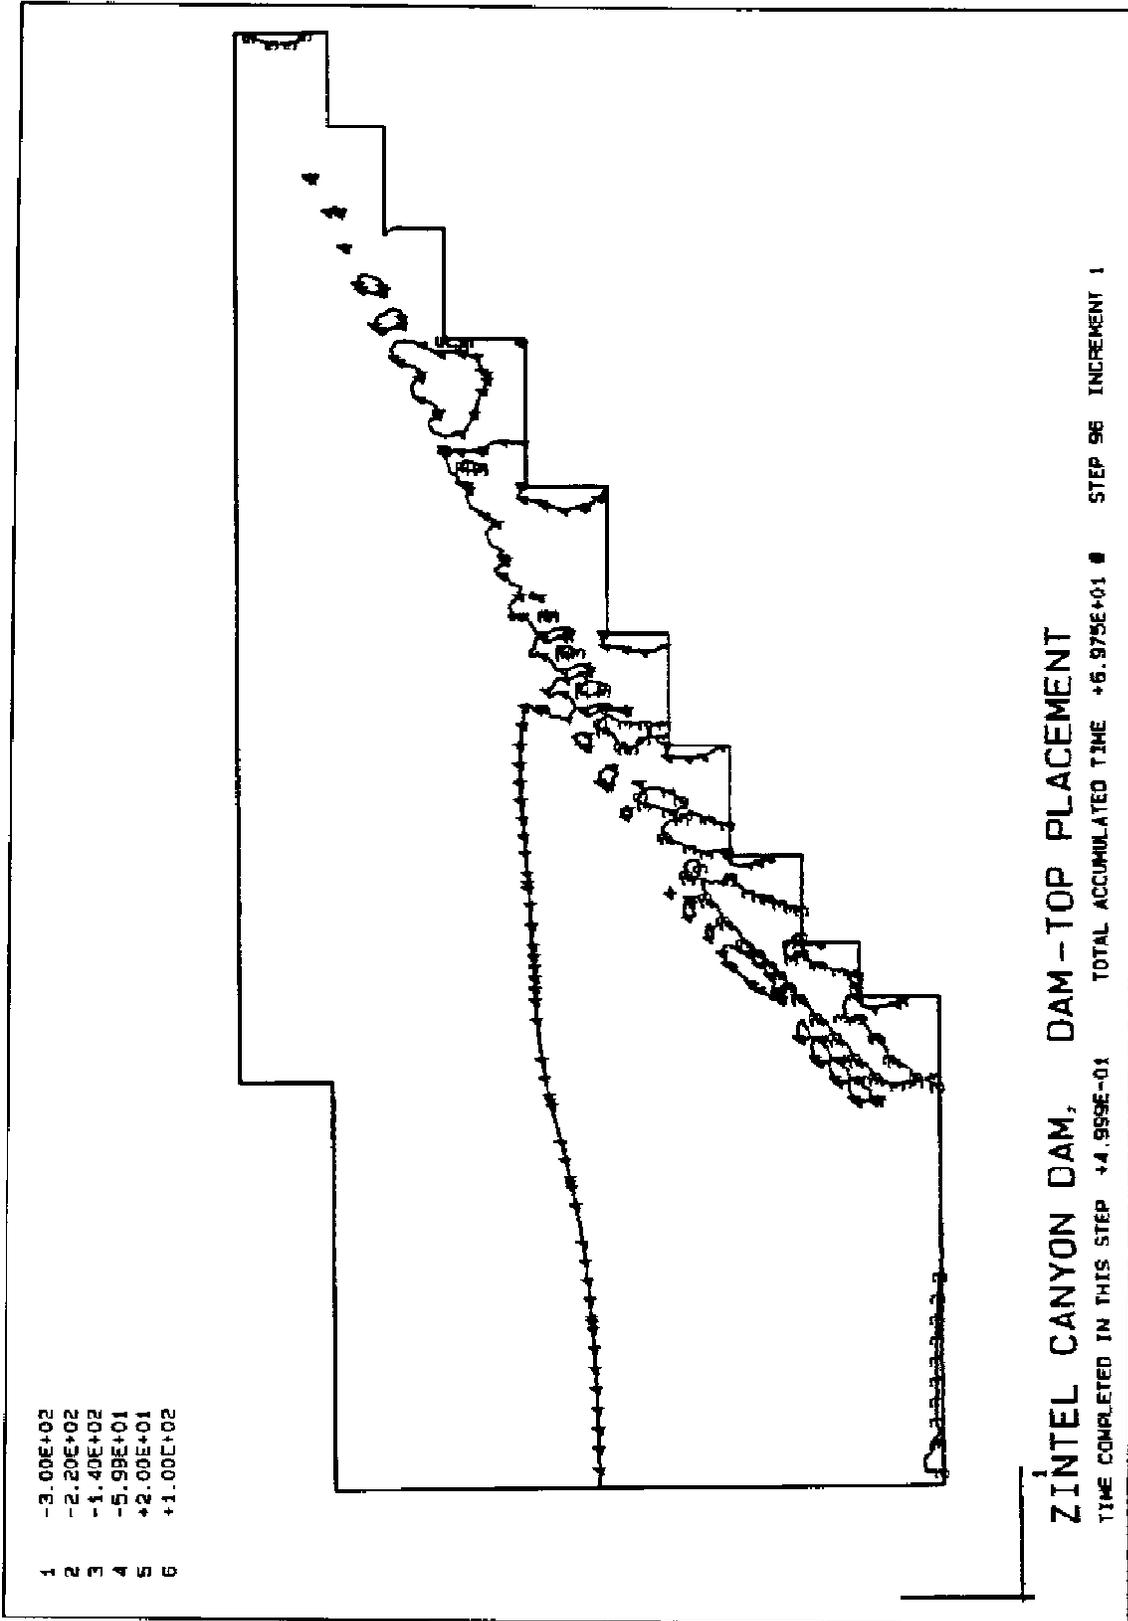


Figure A-21. Global "Y" Stresses Longitudinal Model, Zintel Canyon Dam, dam-top placement

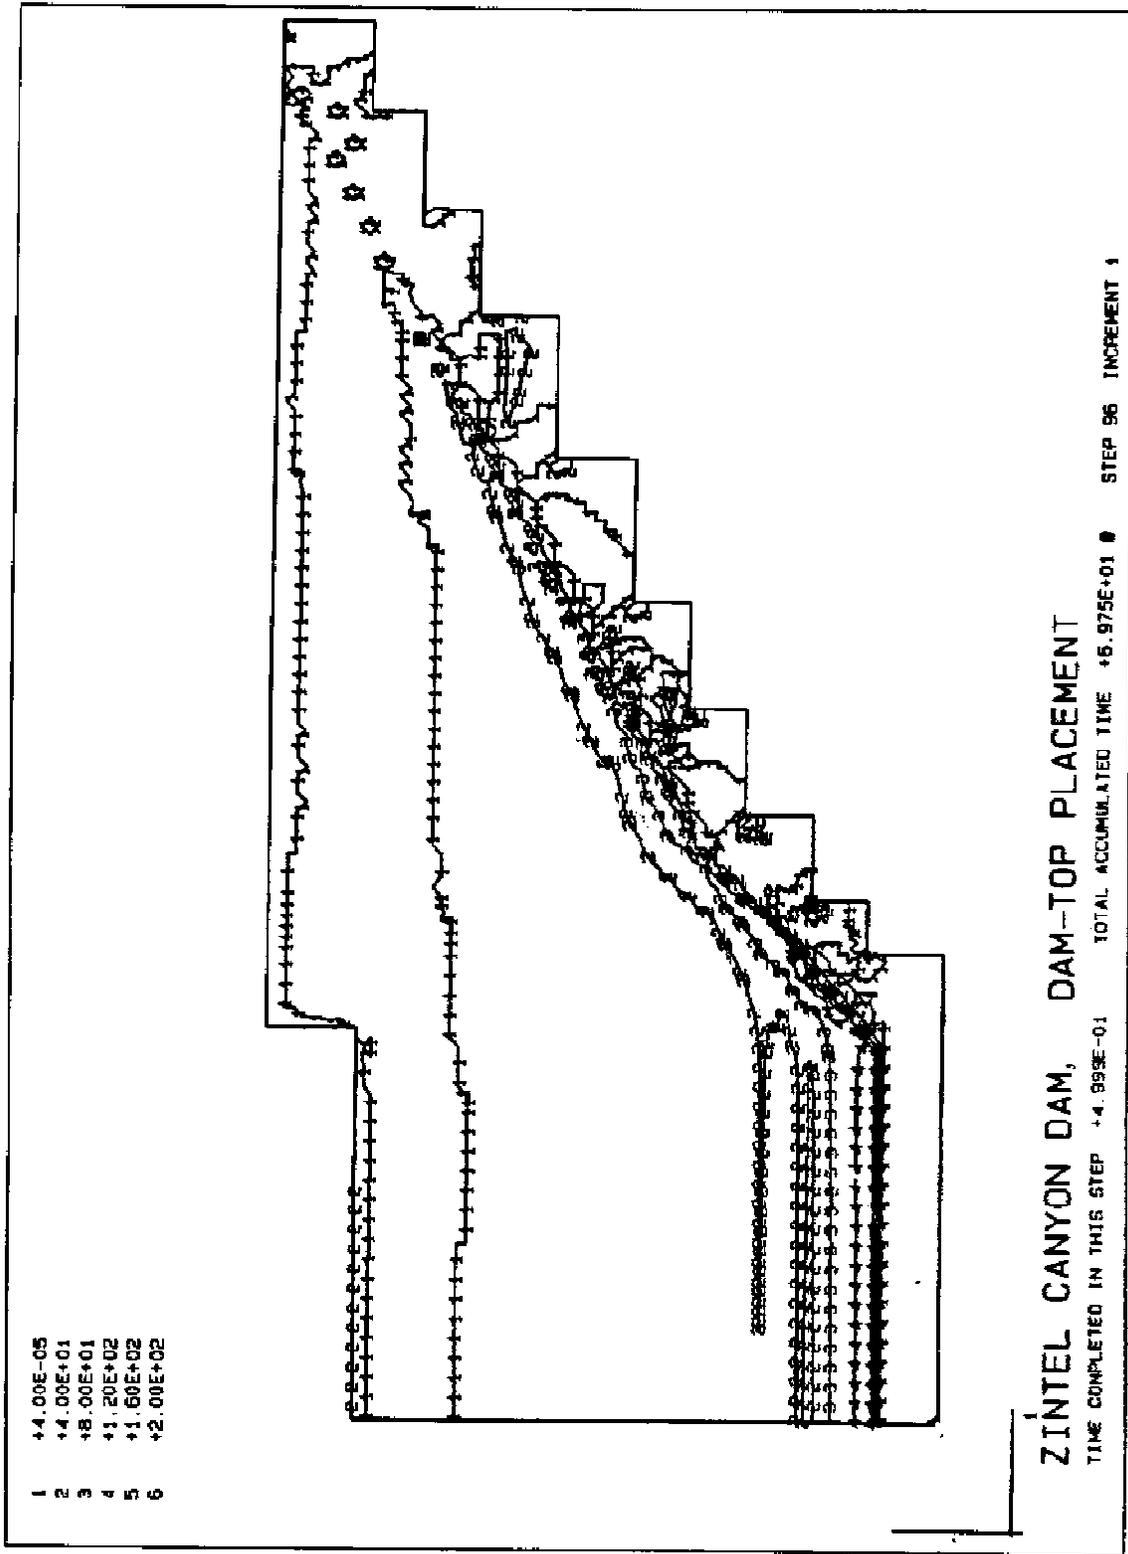


Figure A-22. Principle Stress Contours Longitudinal Model, dam-top placement

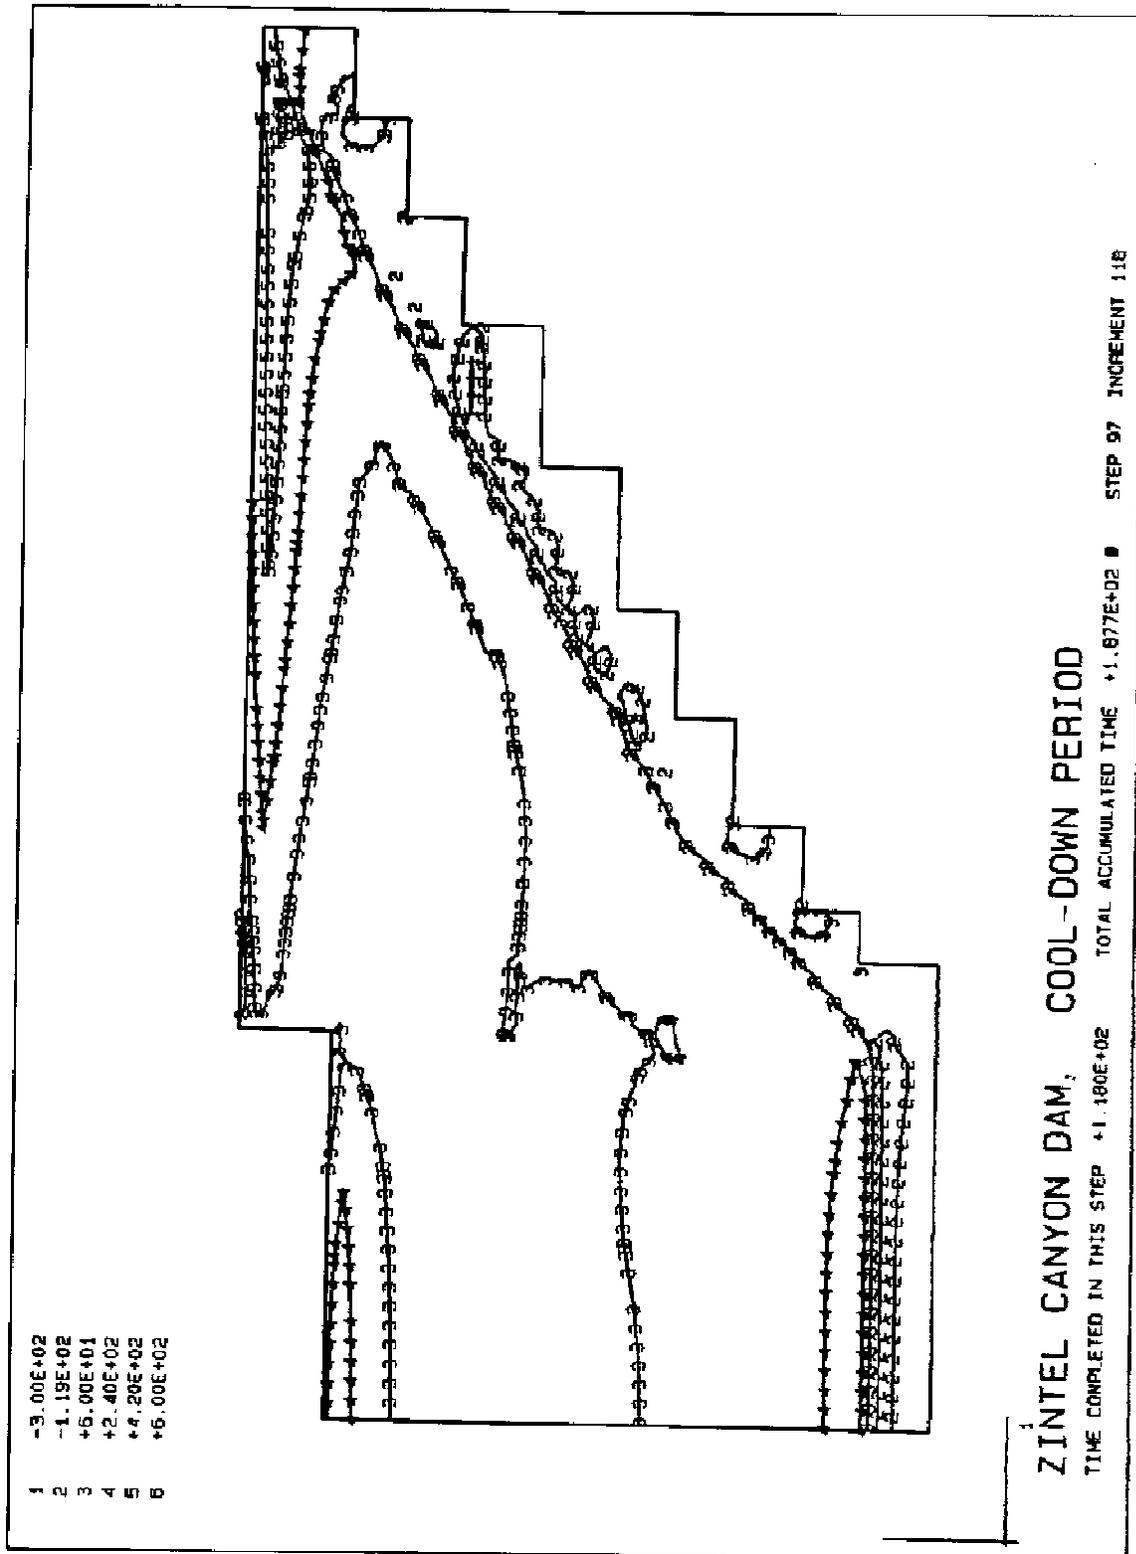


Figure A-23. Global "X" Stress Contours Longitudinal Model, Zintel Canyon Dam, cool-down period

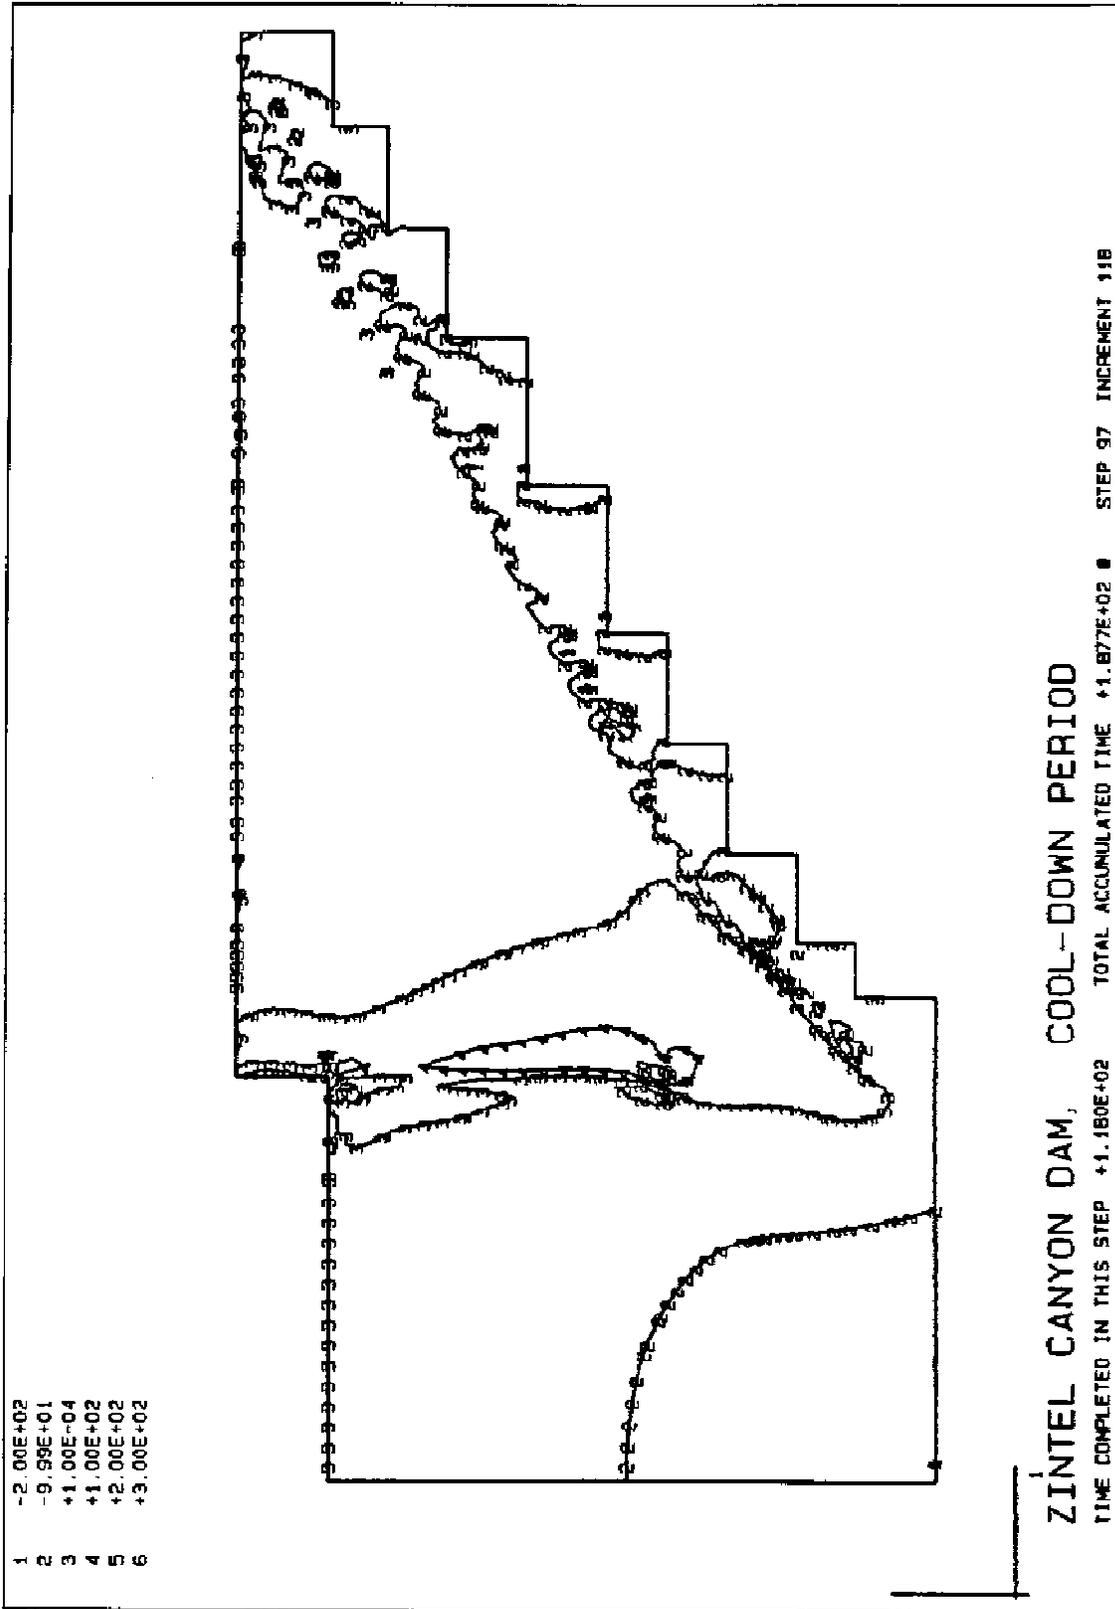


Figure A-24. Global "y" Stress Contours Longitudinal Model, Zintel Canyon Dam, cool-down period

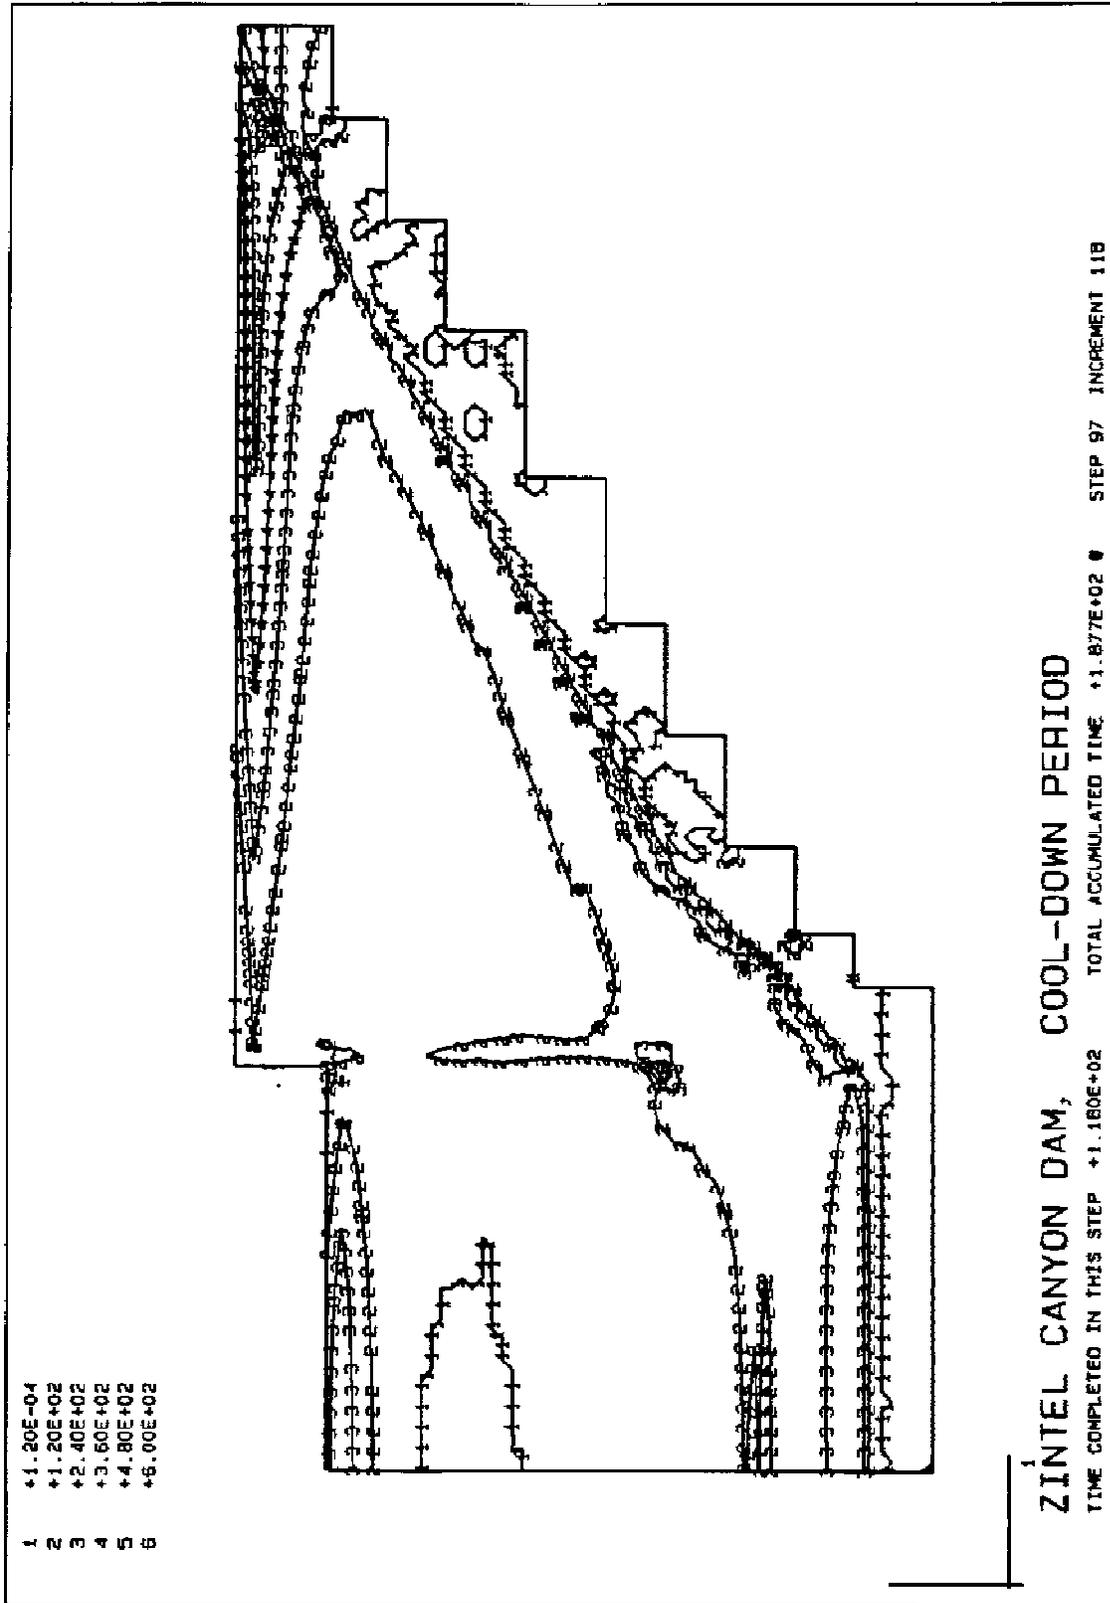


Figure A-25. Principle Stress Contours Longitudinal model, Zintel Canyon Dam, cool-down period

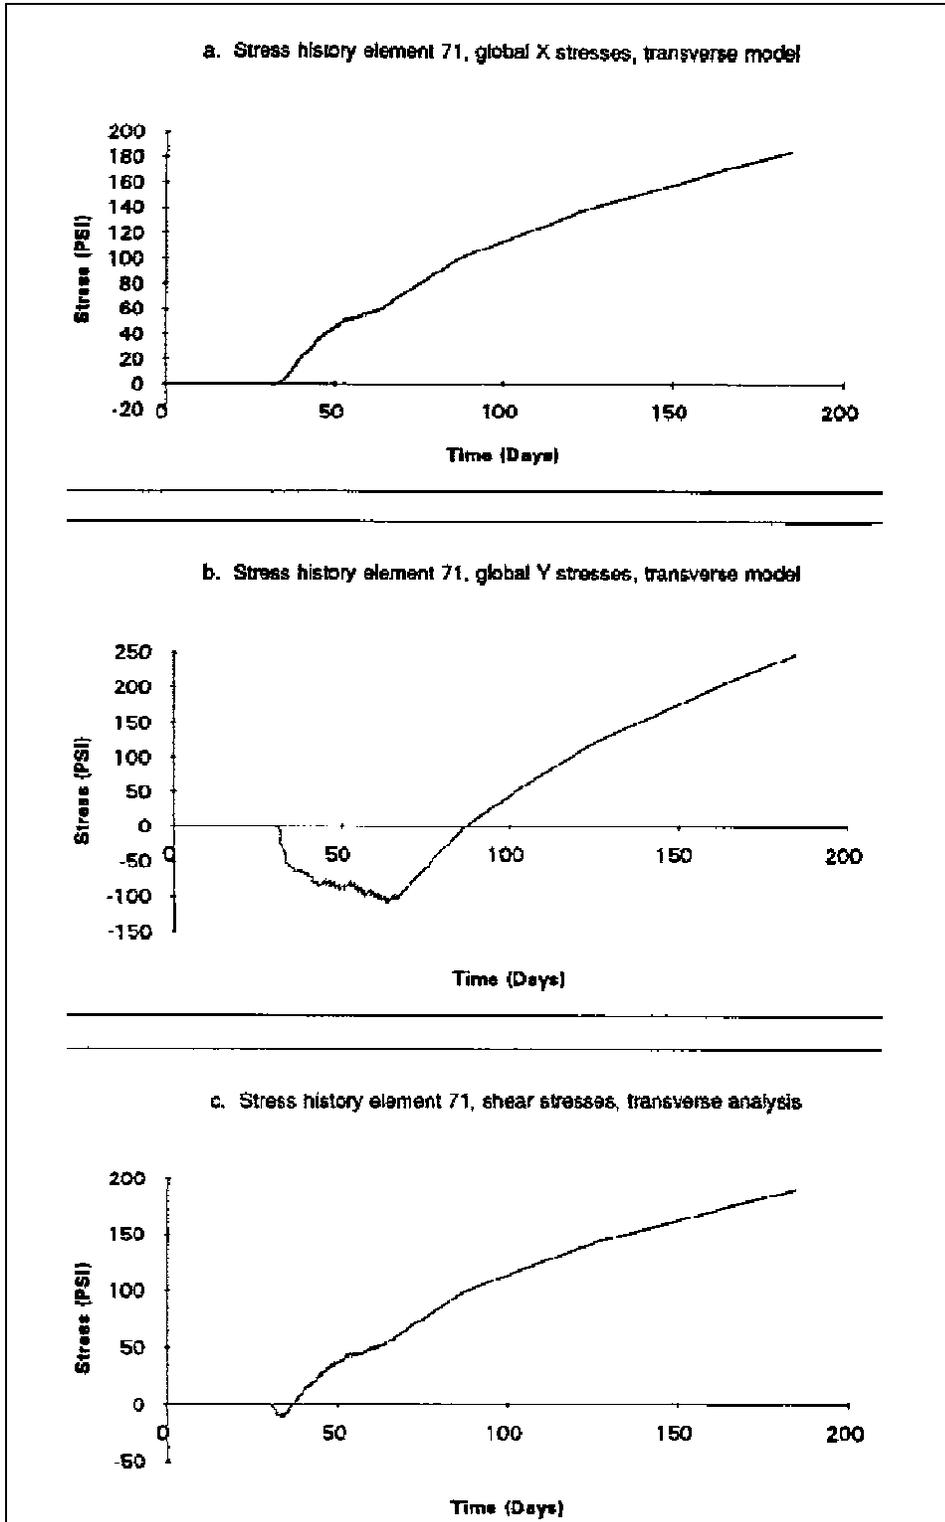


Figure A-26. Stress Histories for Element 71

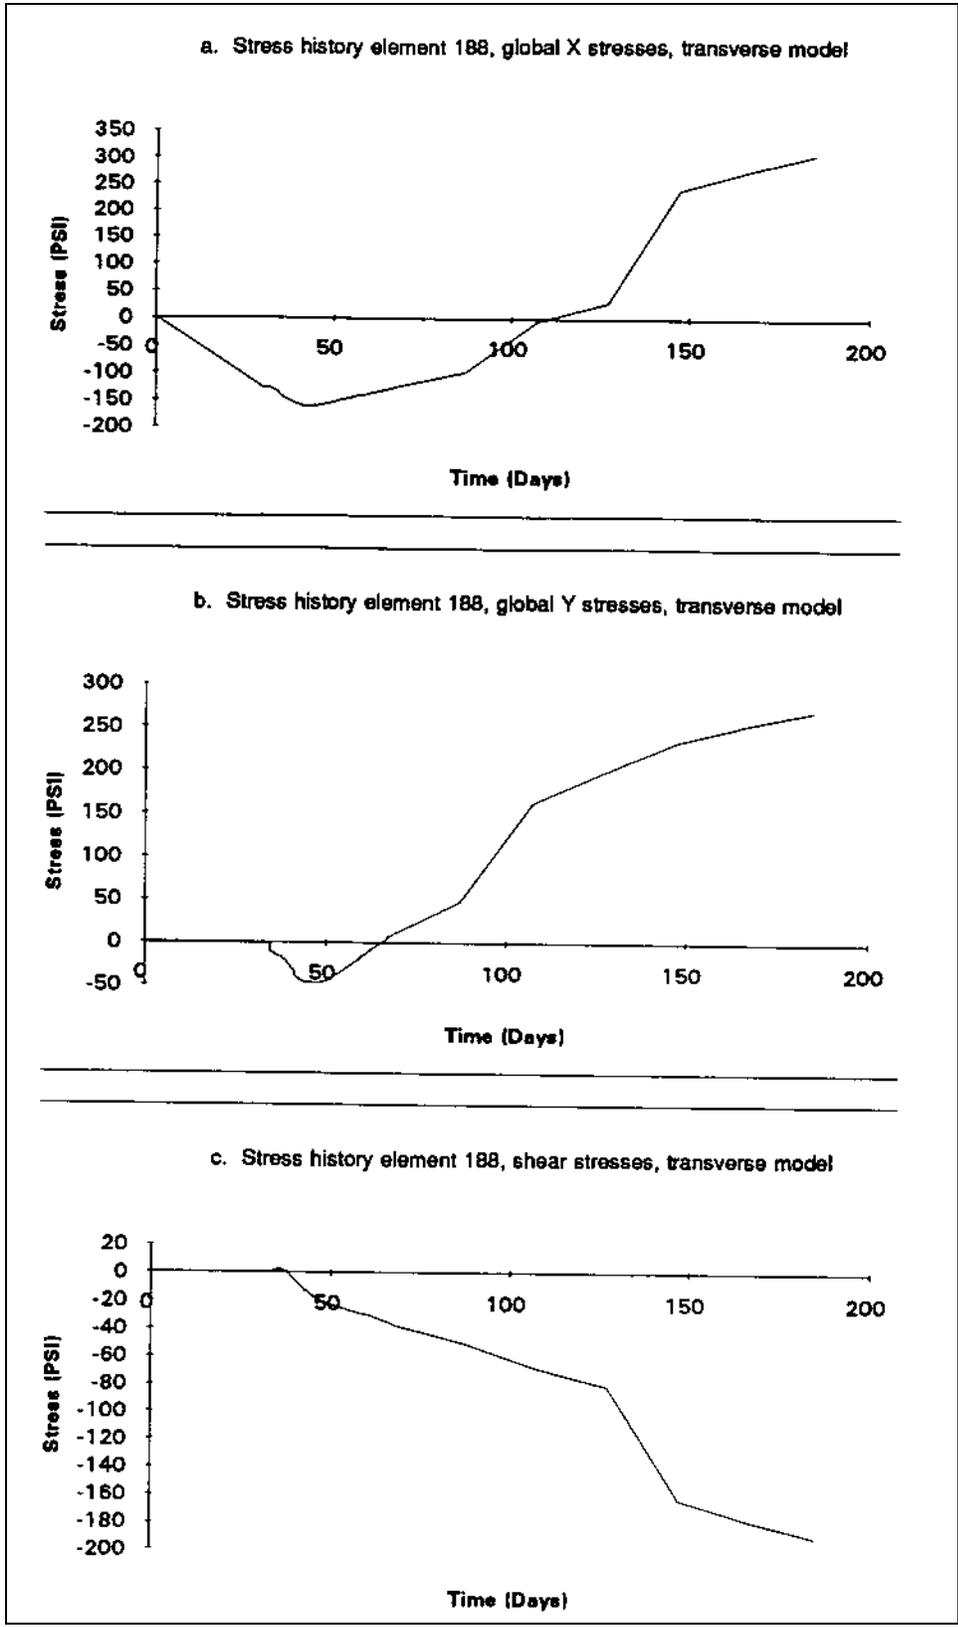


Figure A-27. Stress Histories for Element 188

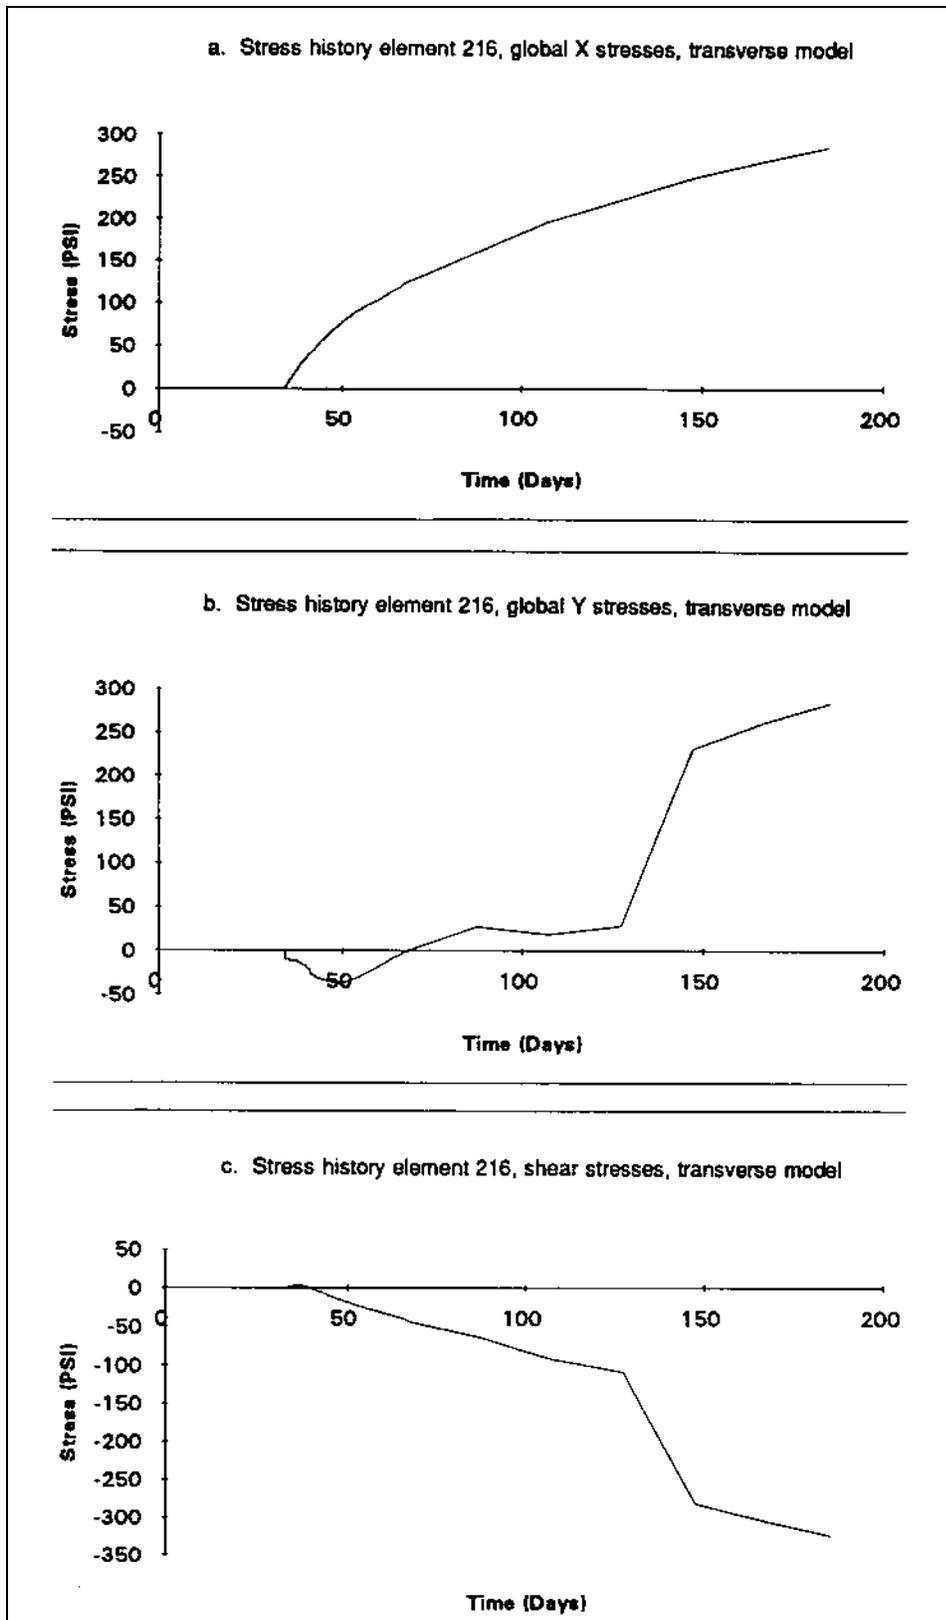


Figure A-28. Stress Histories for Element 216

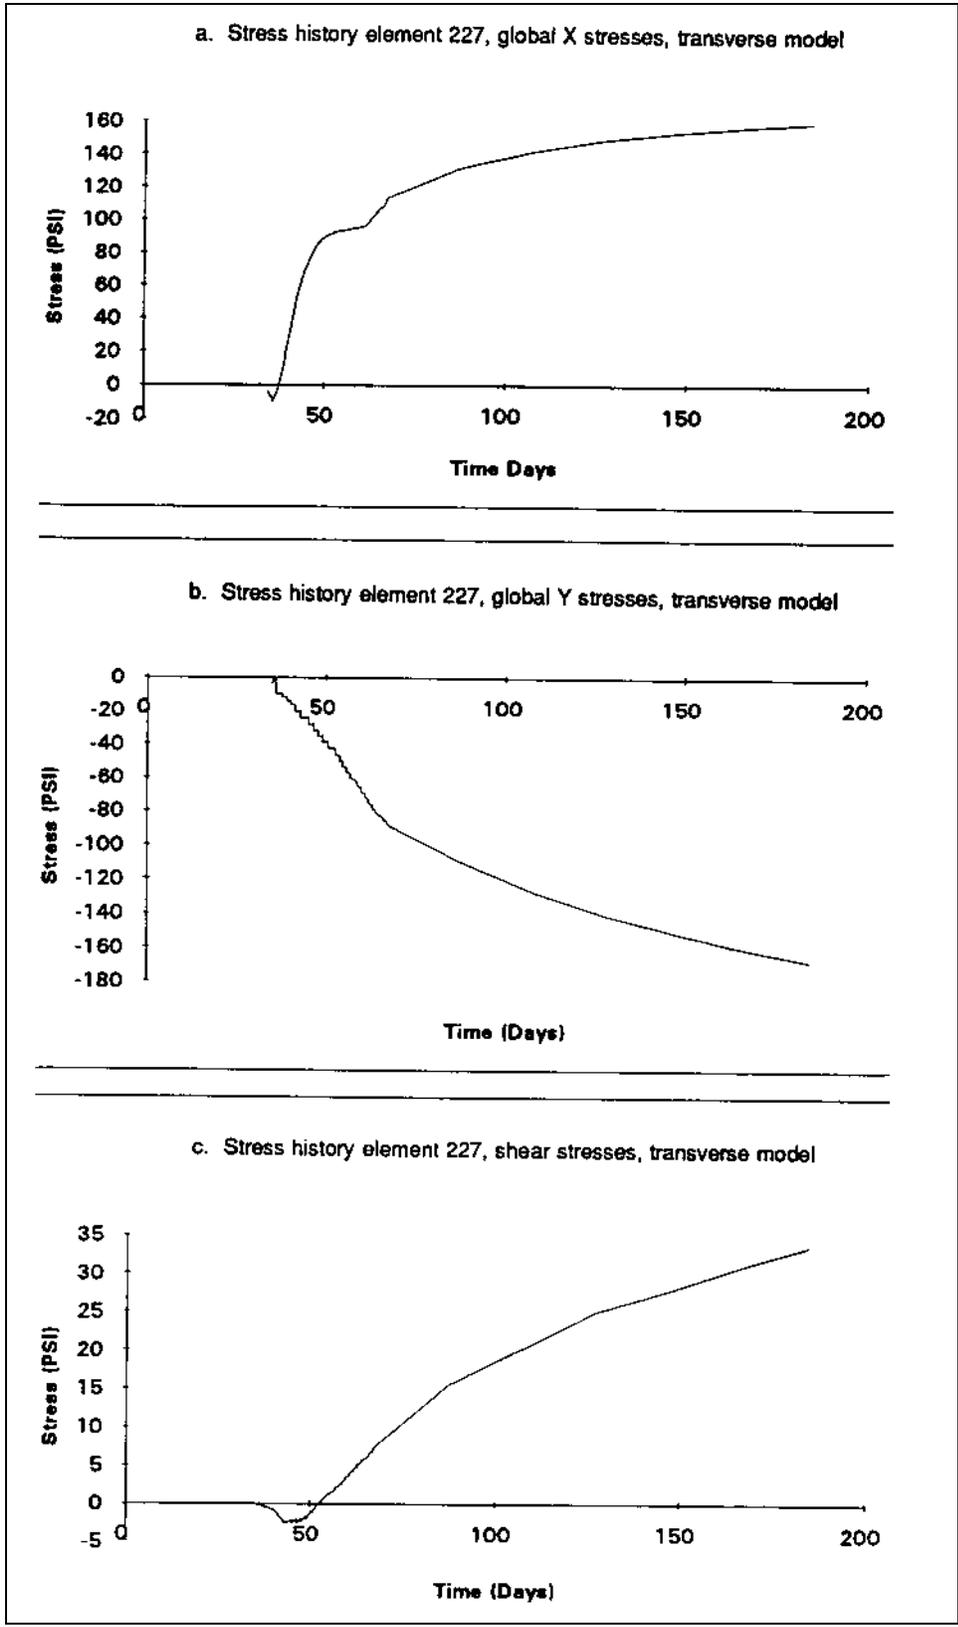


Figure A-29. Stress Histories for Element 227

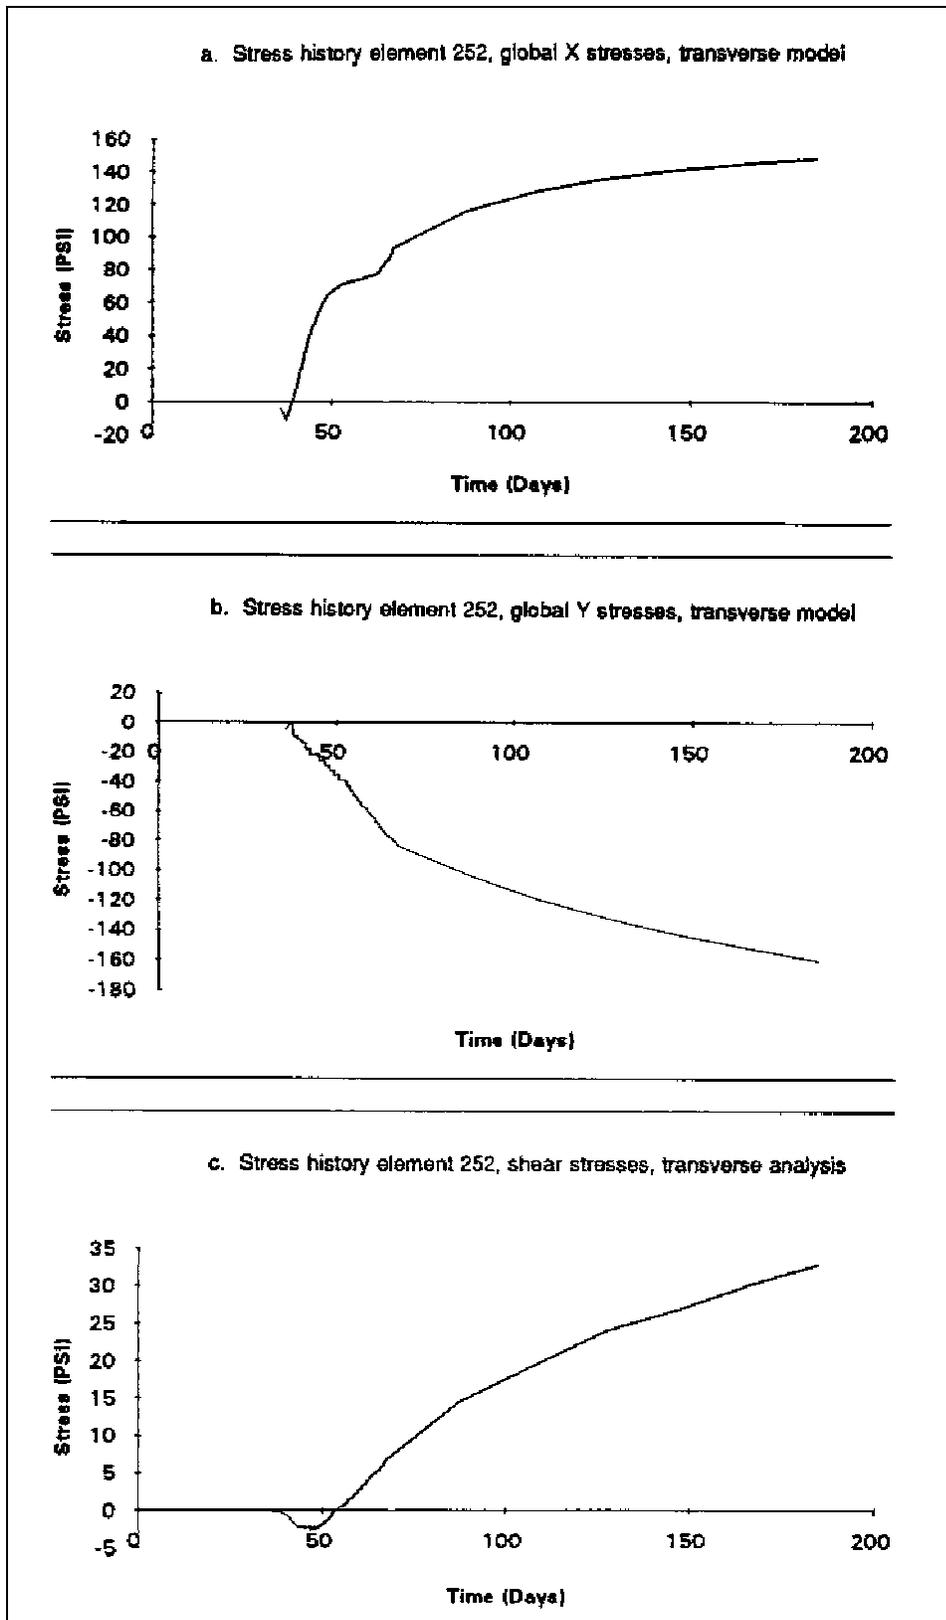


Figure A-30. Stress Histories for Element 252

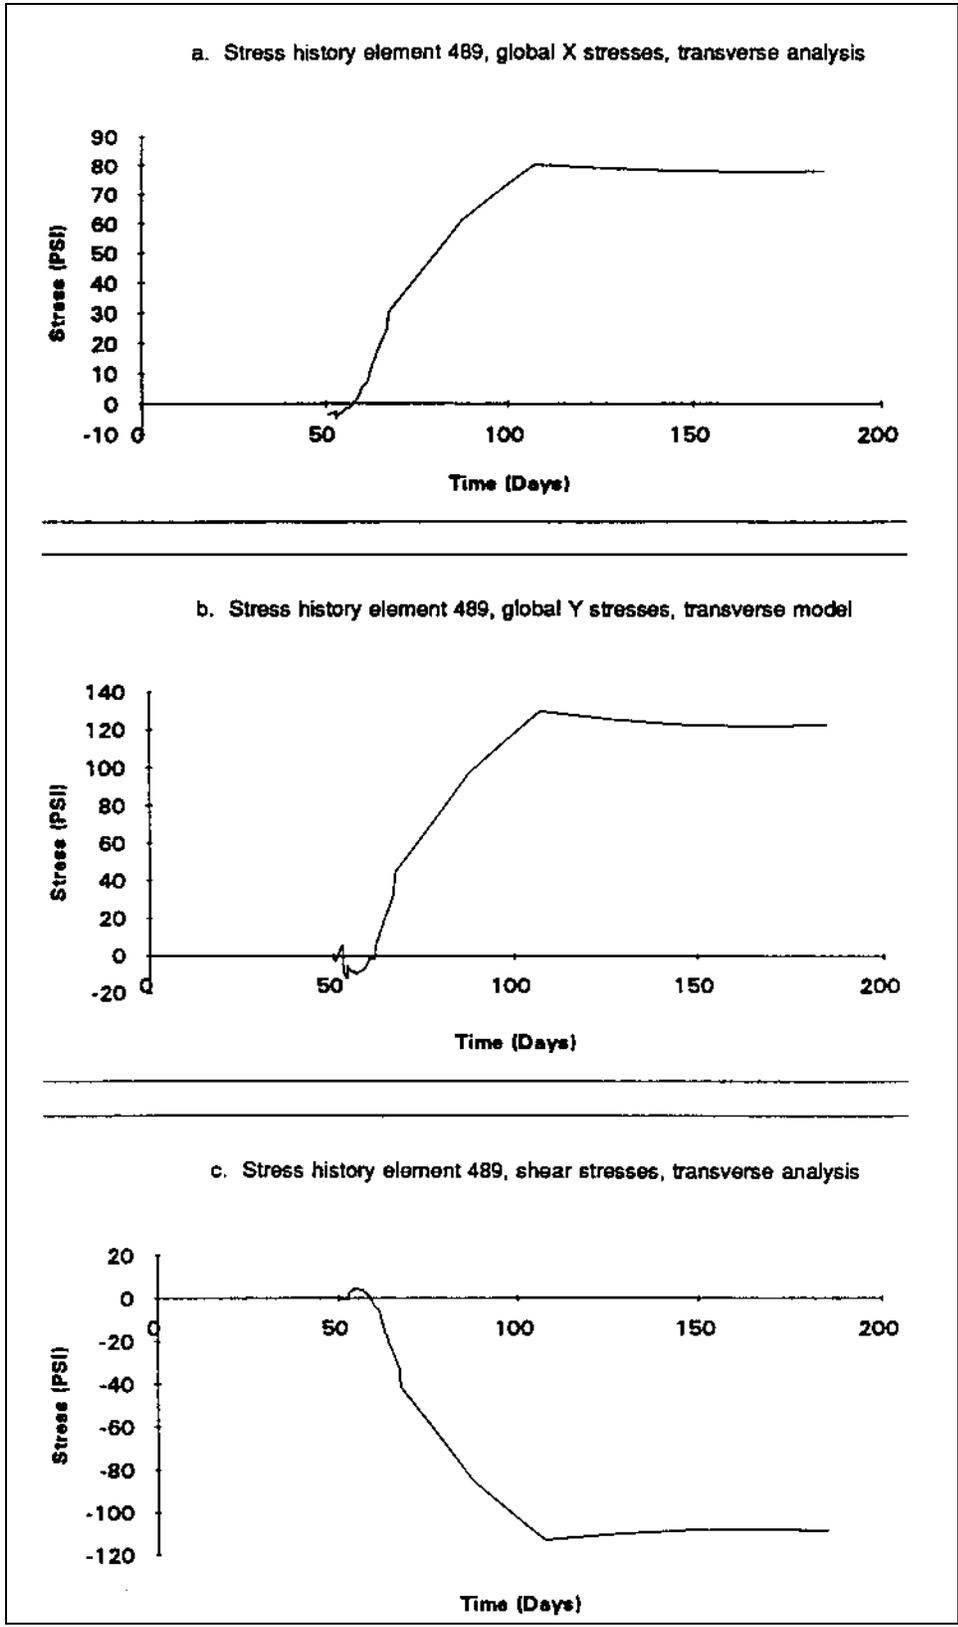


Figure A-31. Stress Histories for Element 489

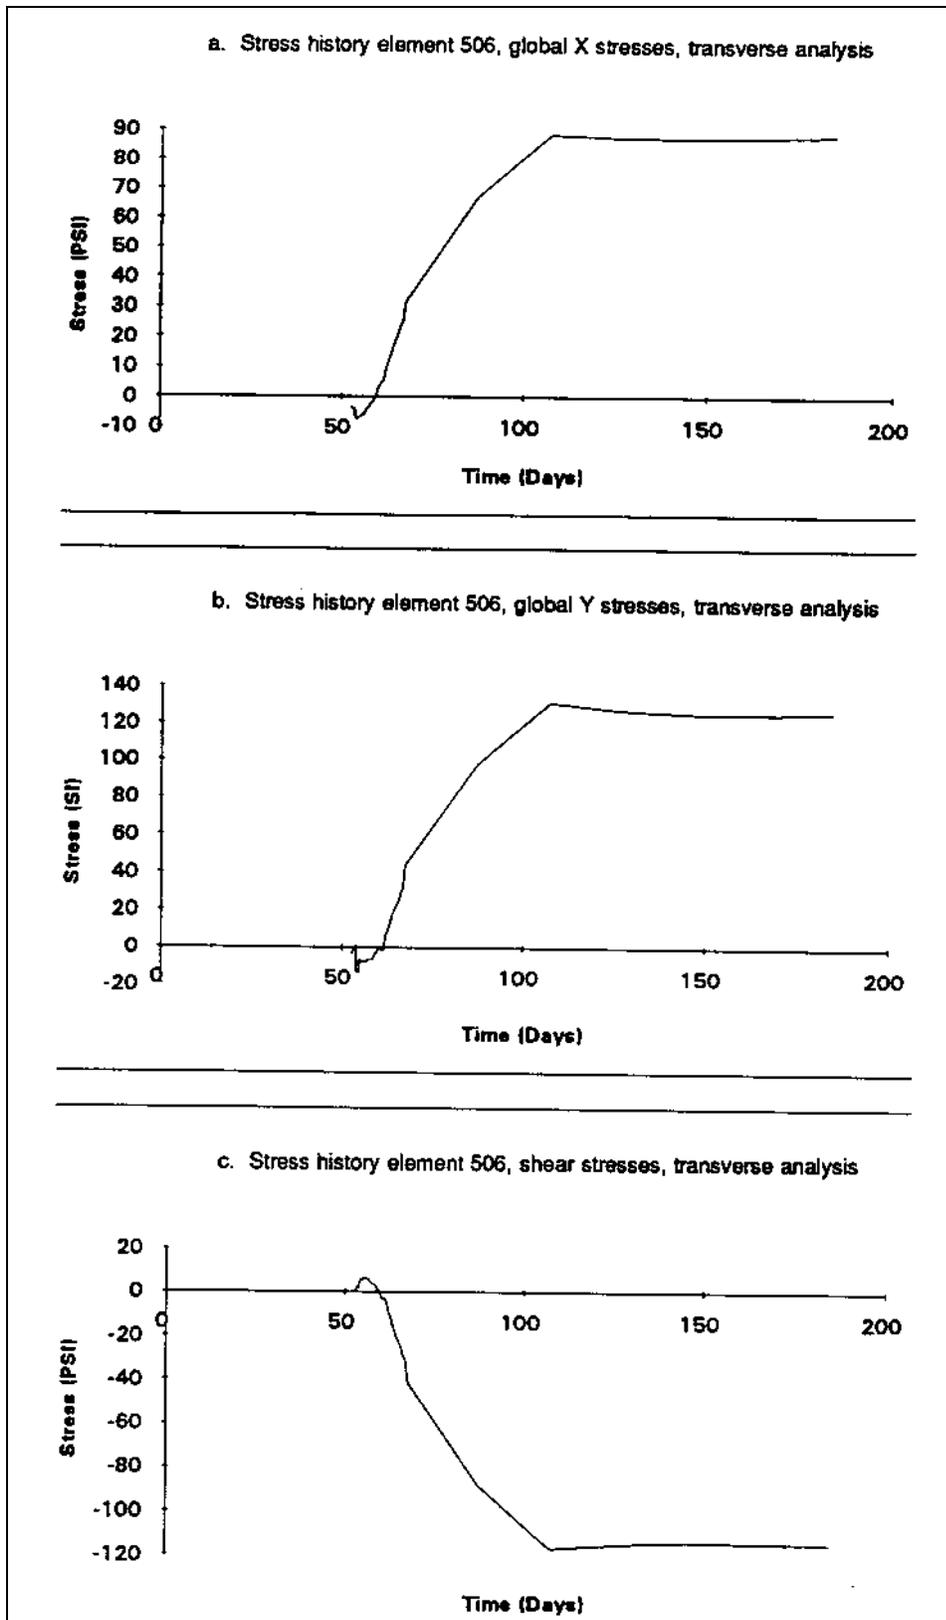


Figure A-32. Stress Histories for Element 506

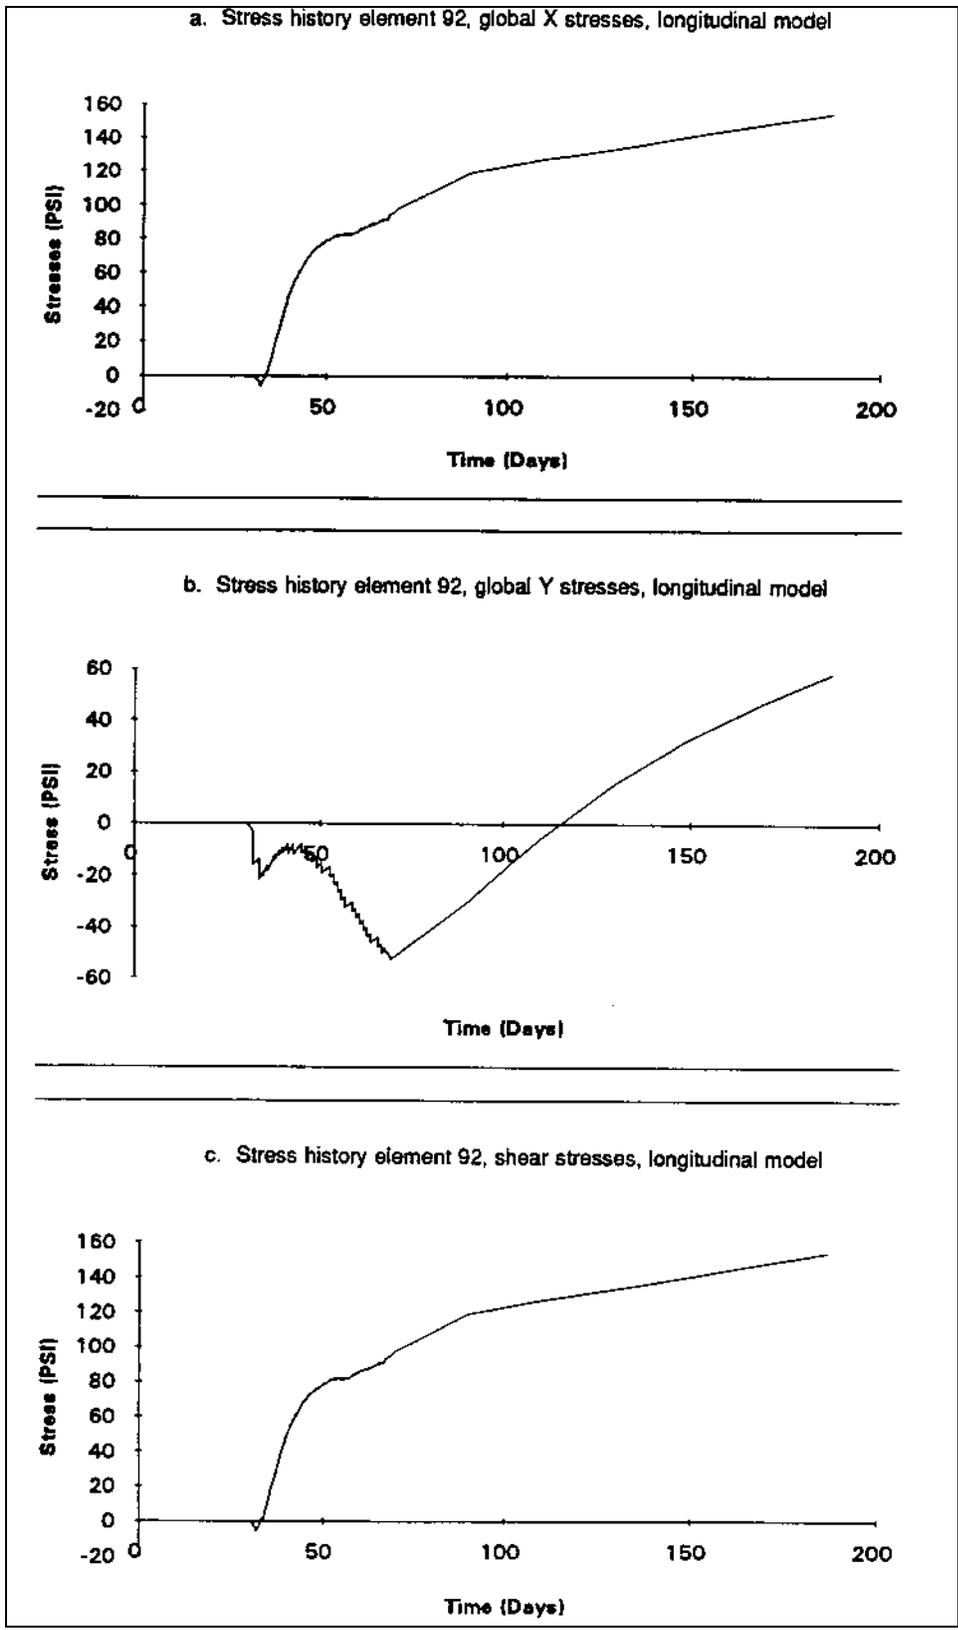


Figure A-33. Stress Histories for Element 92

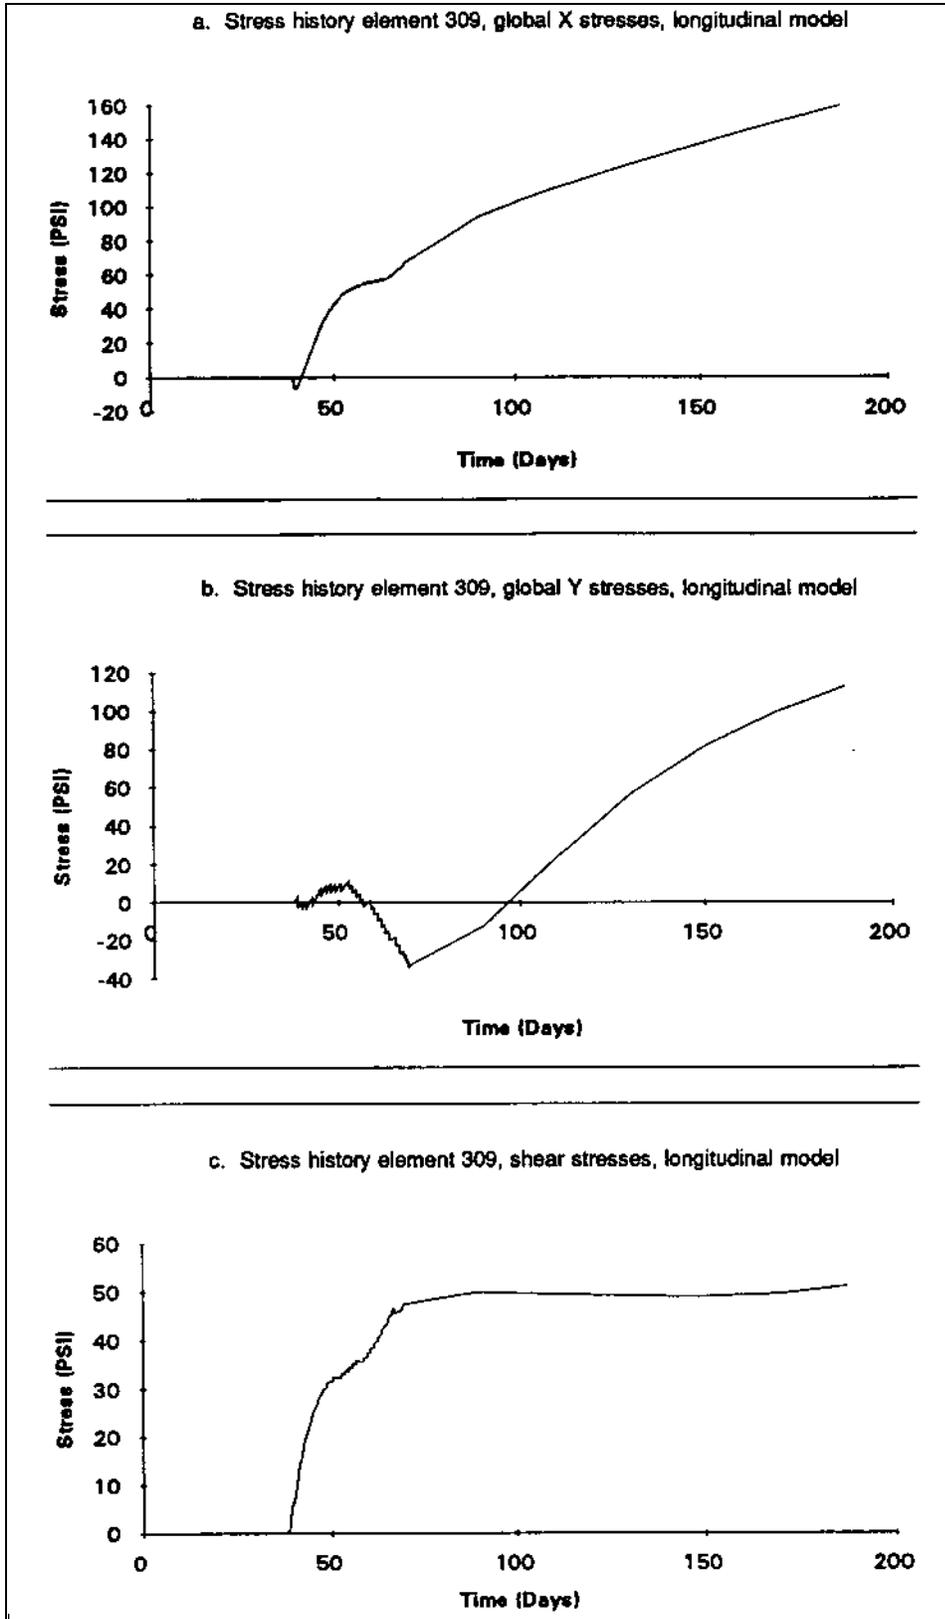


Figure A-34. Stress Histories of Element 309

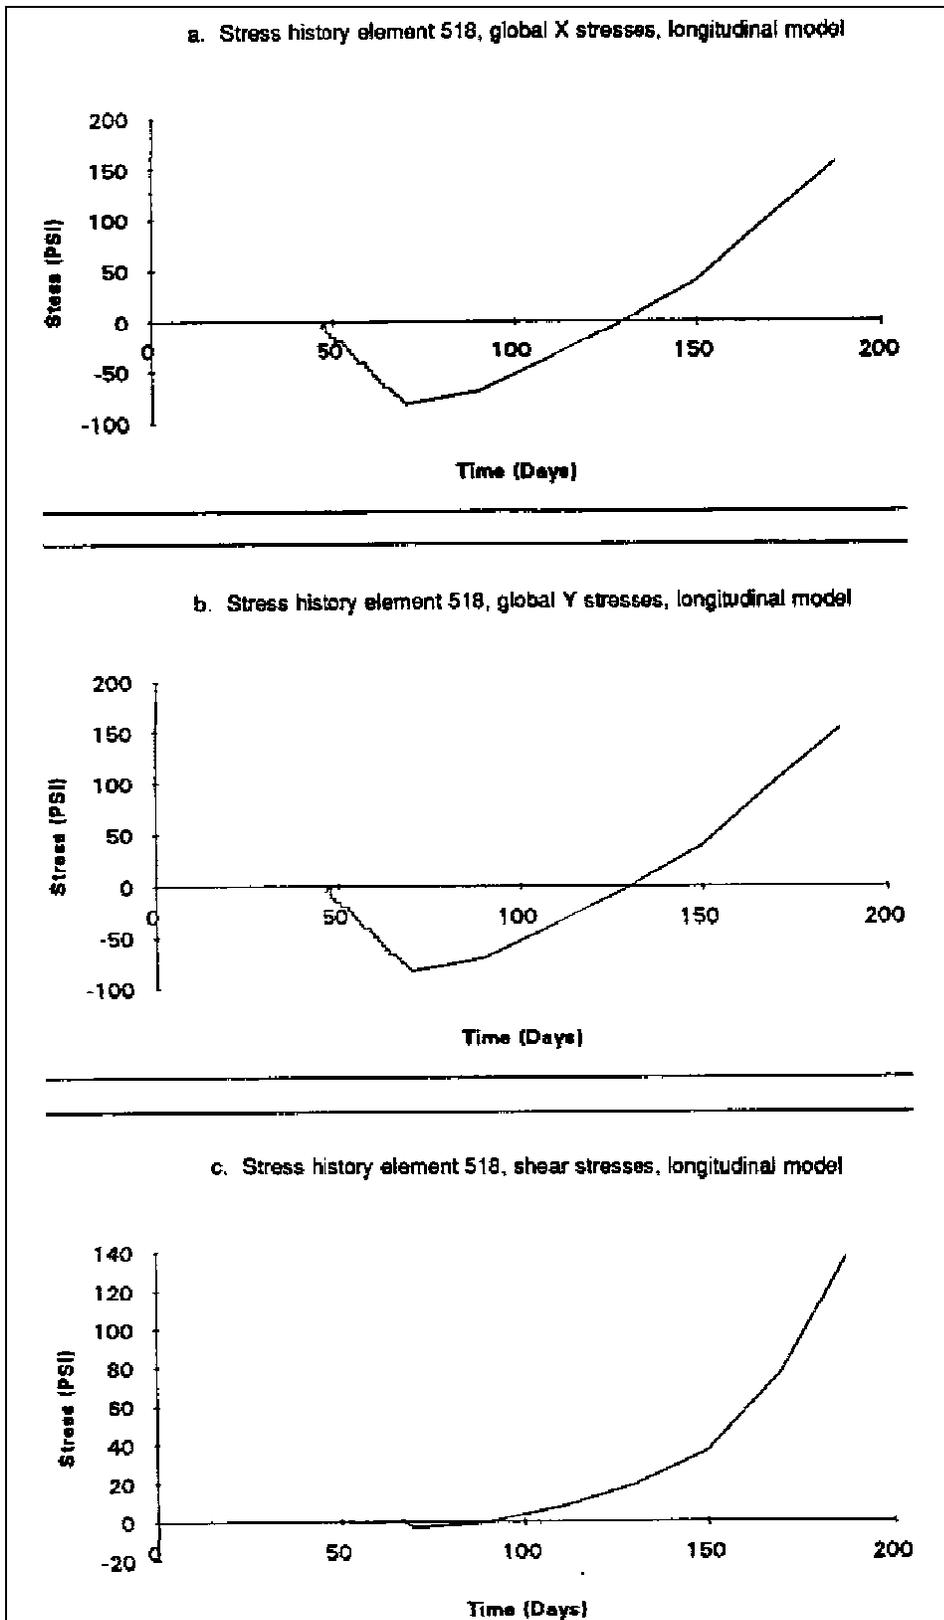


Figure A-35. Stress Histories for Element 518


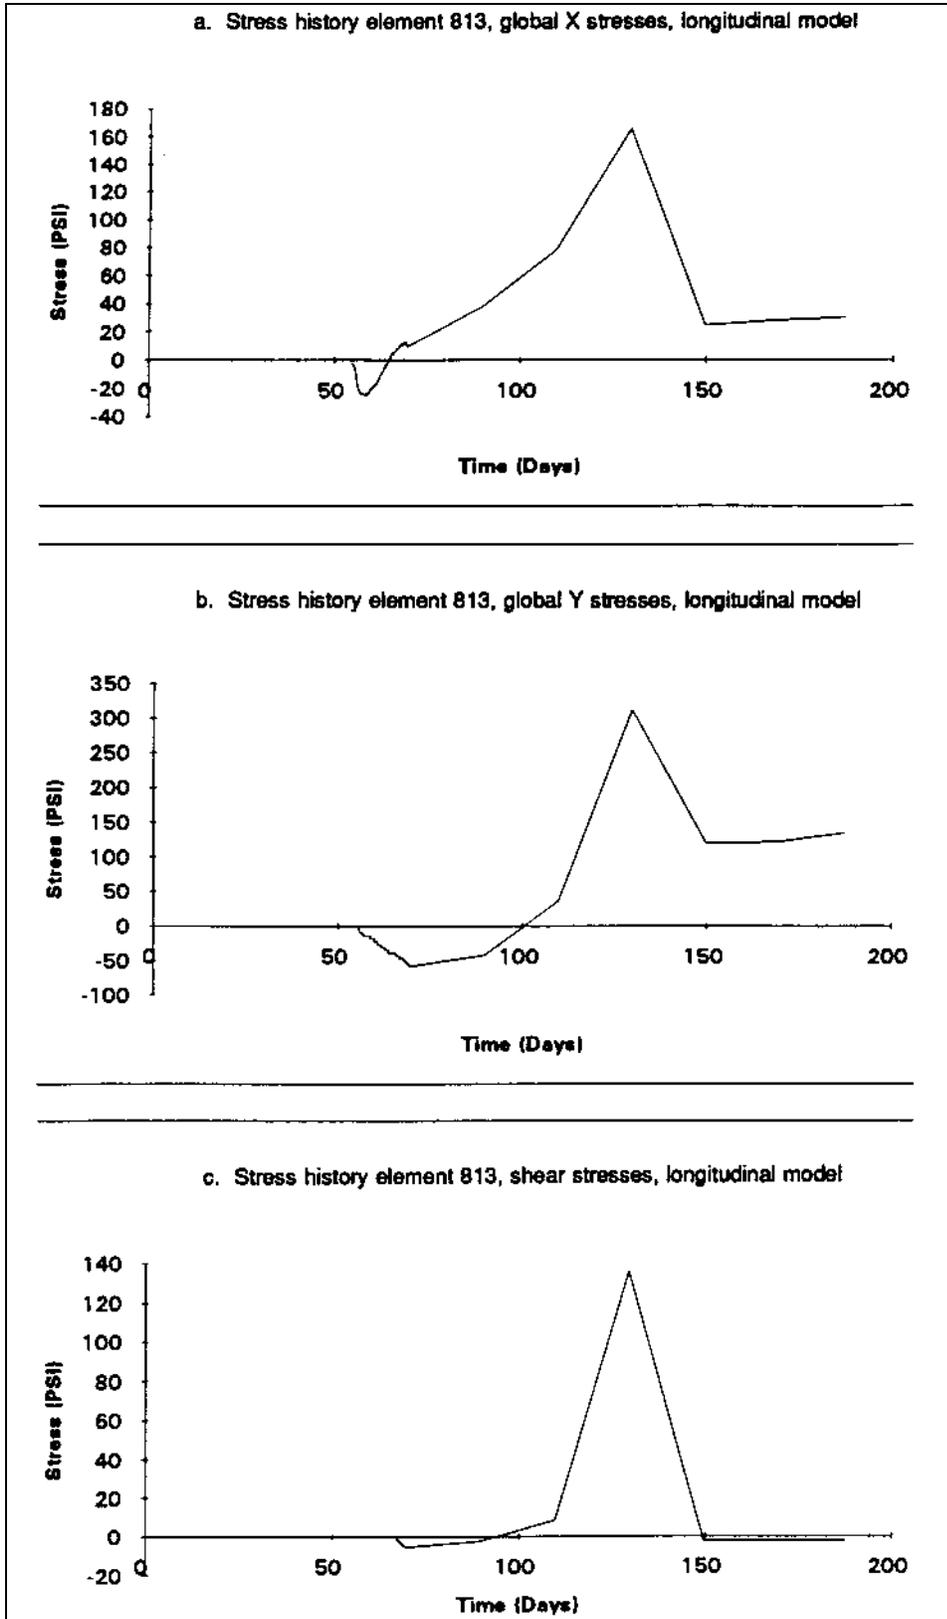


Figure A-36. Stress Histories for Element 813

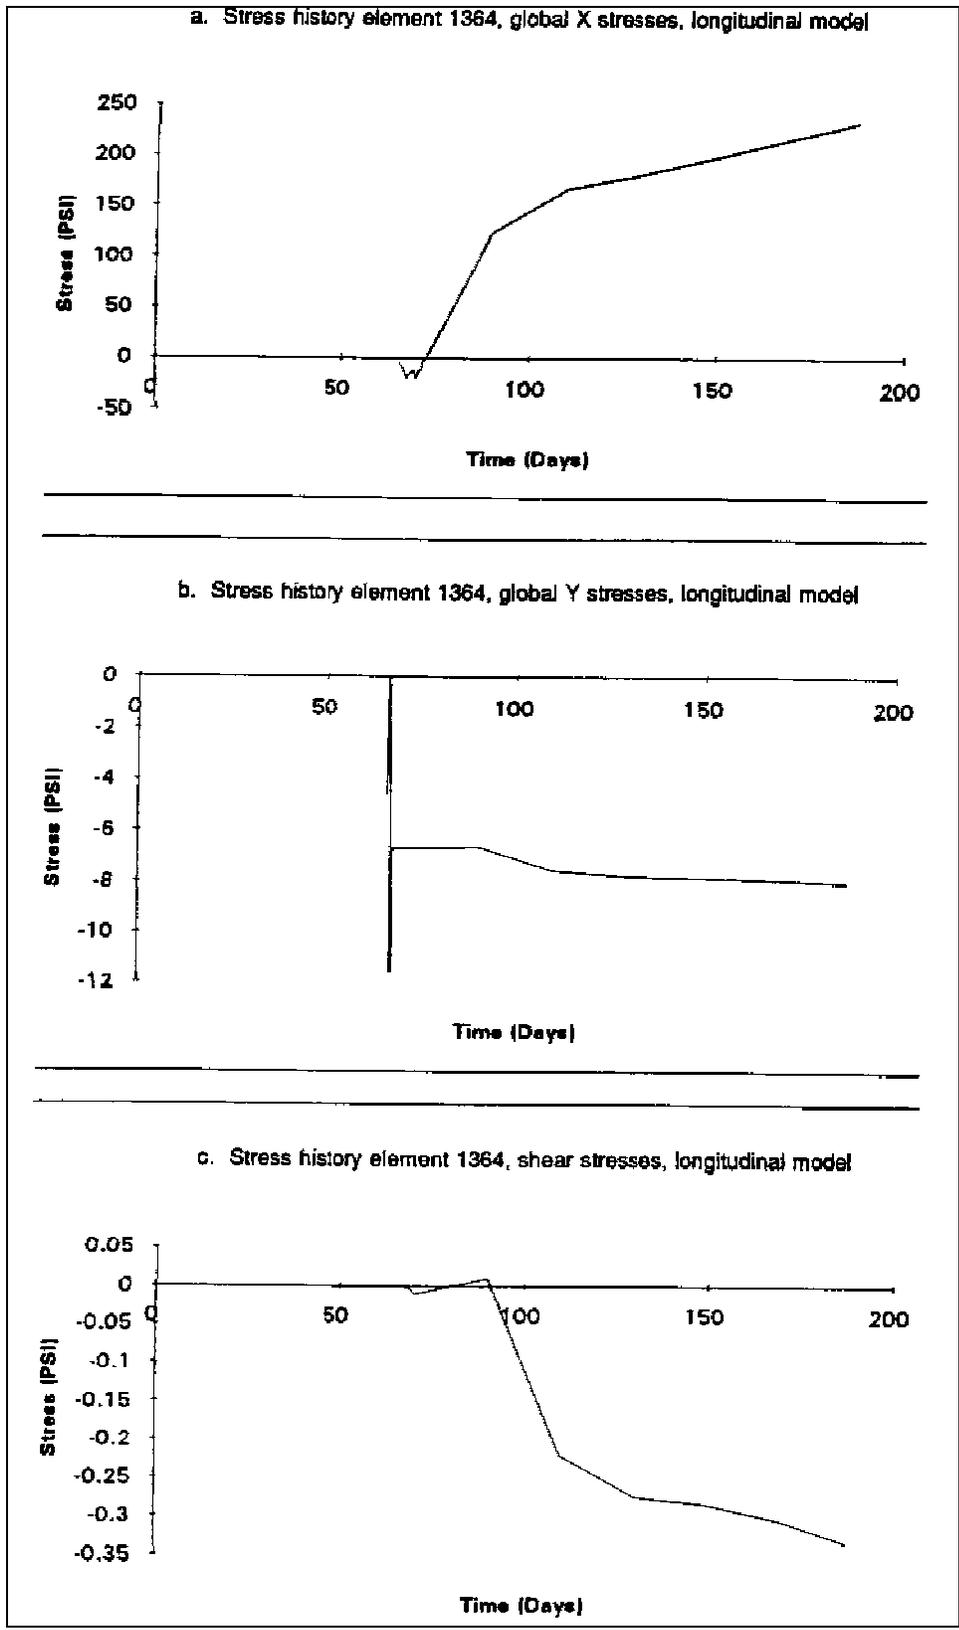

A-37. Stress Histories for Element 1364

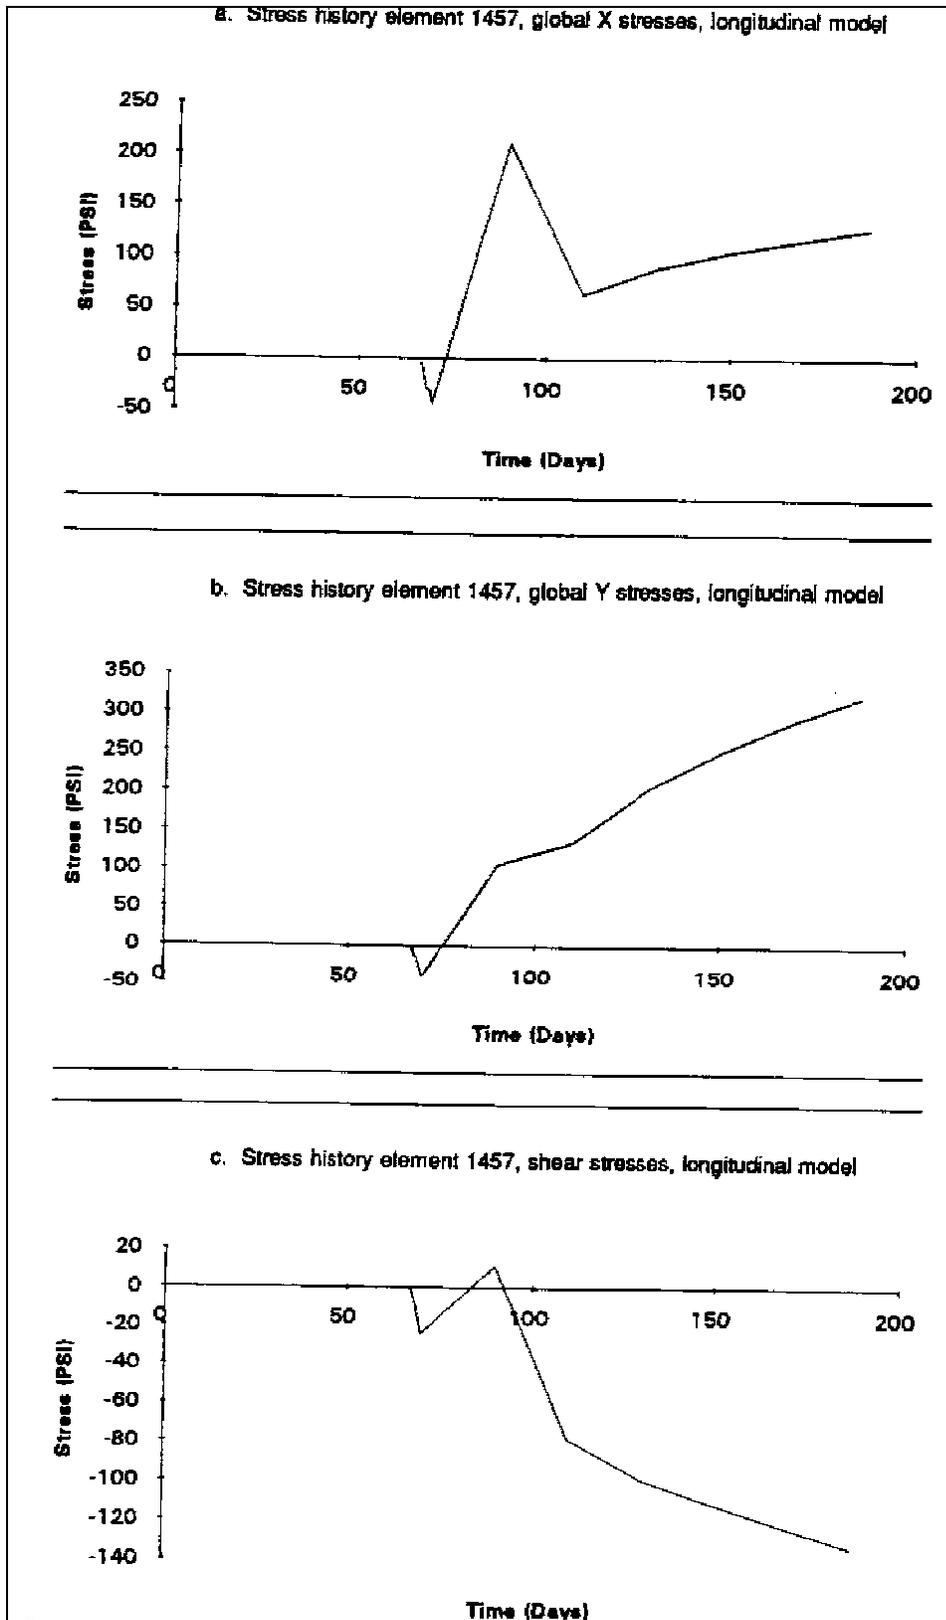


Figure A-38. Stress Histories for Element 1457

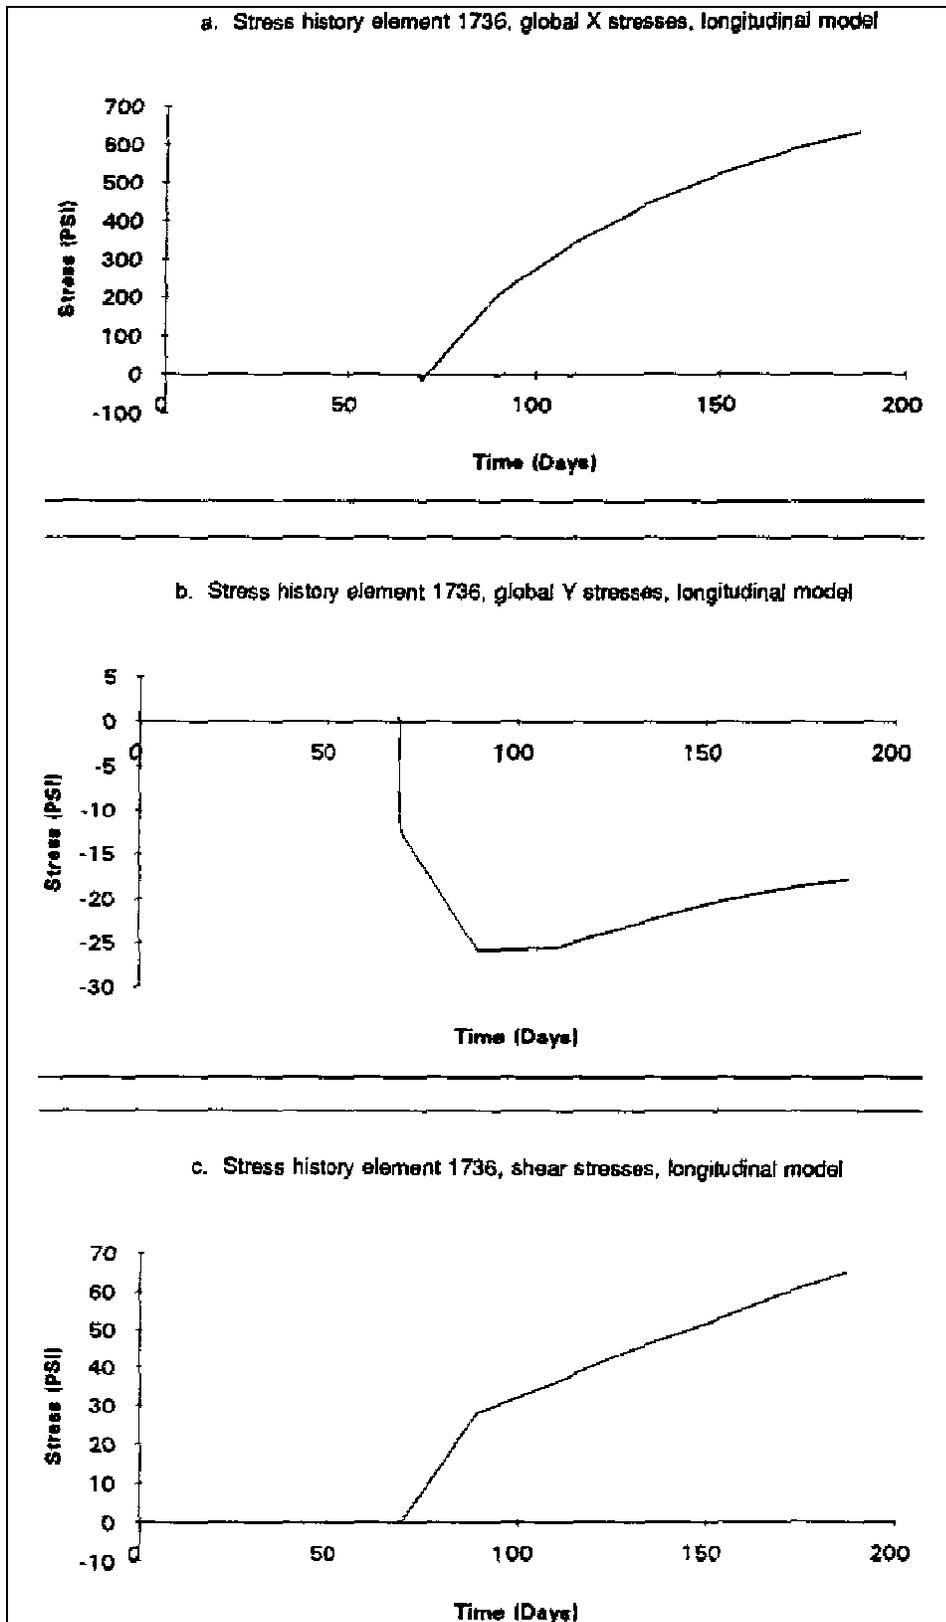


Figure A-39. Stress Histories for Element 1736

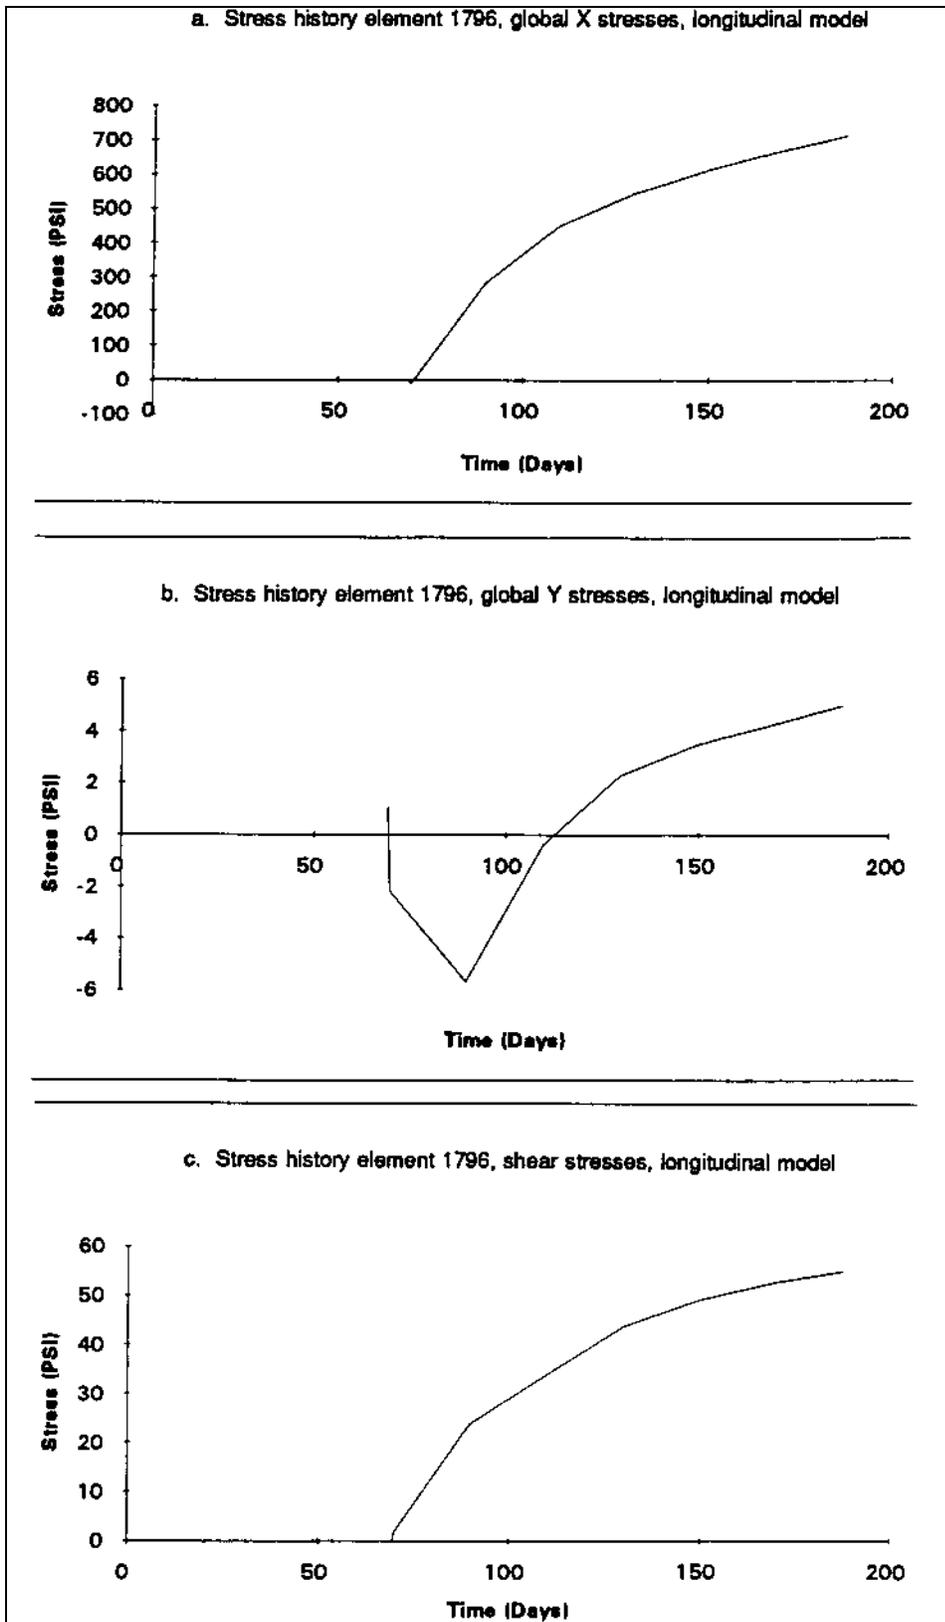


Figure A-40. Stress Histories for Element 1796